



# Planning booklet

PUXA – PURMA - PURA

# Contents

<b>Information</b> . . . . .	3
<b>Worktop</b> . . . . .	5-46
direction of the ducting to the back . . . . .	6
direction of the ducting to the right. . . . .	36
direction of the ducting to the left . . . . .	42
<b>Plinth</b> . . . . .	47-94
direction of the ducting to the right. . . . .	48
direction of the ducting to the left . . . . .	72
<b>Floor</b> . . . . .	95-190
direction of the ducting to the back. . . . .	96
direction of the ducting to the right . . . . .	120
direction of the ducting to the front . . . . .	144
direction of the ducting to the left . . . . .	168
<b>Cellar</b> . . . . .	191-239
direction of the ducting to the back . . . . .	192
direction of the ducting to the right . . . . .	204
direction of the ducting to the front . . . . .	216
direction of the ducting to the left . . . . .	228

# Information

To make it easier for you to work with standard planning situations, which we have illustrated in our so-called sample plans, we have created two planning booklets for each product series.

For each product family, there is one planning booklet for exhaust air solutions and one for recirculation air solutions.

With the one-off download of 10 planning booklets, you have access to the complete range of our more than 500 sample plans. By simply linking to the table of contents and using the inserted bookmarks, you can find the planning you need easily, quickly and effectively.

We will be happy to check your installation situation and parts list. Simply send us the floor plan of your kitchen design and the following information by e-mail to [planung@bora.com](mailto:planung@bora.com):

Which BORA system is being planned?

Should the system be operated with exhaust air or recirculated air?

Necessary information for...

... Exhaust air:      Desired position of the wall box on the outer wall?  
                            Level of the duct routing (plinth area, floor structure, or on the basement ceiling)?  
                            If applicable, route of the exhaust air duct, if direct route not possible.

... Recirculation:      ULBF or ULB3X air purification box

You can reach us for further questions by telephone at  
+49 (0) 80 35 98 40 - 140.

# Naming Sample Plans

## „speaking numbering system”

Quantity exhaust modules	System	Version	Level	Offset	Direction	End of Ducting	Special
2	PKA3 Professional 3.0	A - exhaust	0 - without	0 - without	0 - without	0 - without	0 - without
	PKAS3 Professional 3.0 compact	U - recirculation	1 - worktop	1 - EFRV	1 - back	1 - UEBF	1 - hanging
	CKA2 Classic 2.0		2 - plinth	2- EFRG	2 - right	2 - UEBR	2 - standing
	P X Pure/M Pure/Pure		3 - floor construction		3 - front	3 - swanneck UEBF	3 - blind corner
	SP S Pure		4 - cellar		4 - left	4 - swanneck UEBR	4 - upright
	B Basic					5 - ULBF	
						6 - ULB3X	
						7 - PULBTA	

Example:

P A 2 0 4 4 0


Cooktop extractor X Pure, M Pure or Pure exhaust version, ducting in plinth to the left with swanneck and UEBR

# Worktop


flat wall sleeve. . . . .	6
round wall sleeve. . . . .	24
direction of ducting to the right . . . . .	36
direction of the ducting to the left . . . . .	42

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFV duct connection flat
1	UEBF 3box wall sleeve
1	UEBFES 3box wall sleeve vent guard
1	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

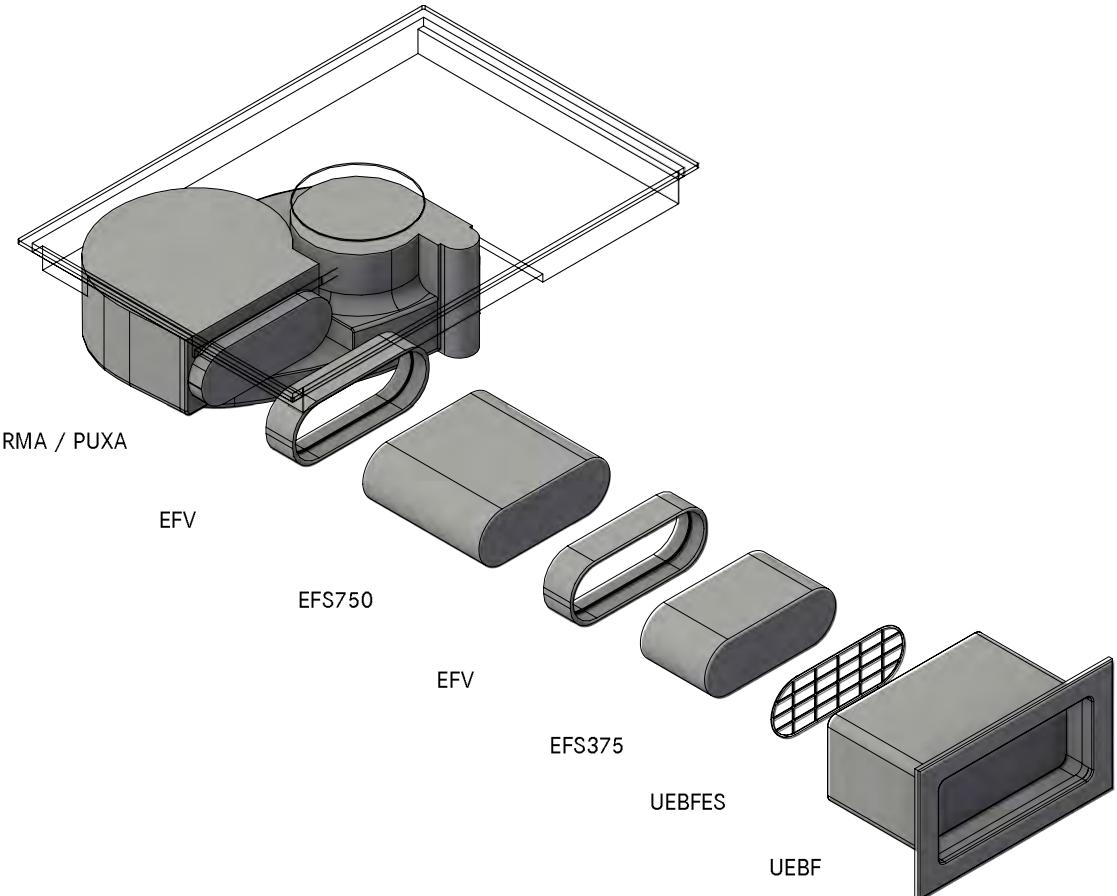

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. UEBFES/UEBRES grill must be installed if the ducting has no bends and the ducting route is  $\leq 900$  mm
3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

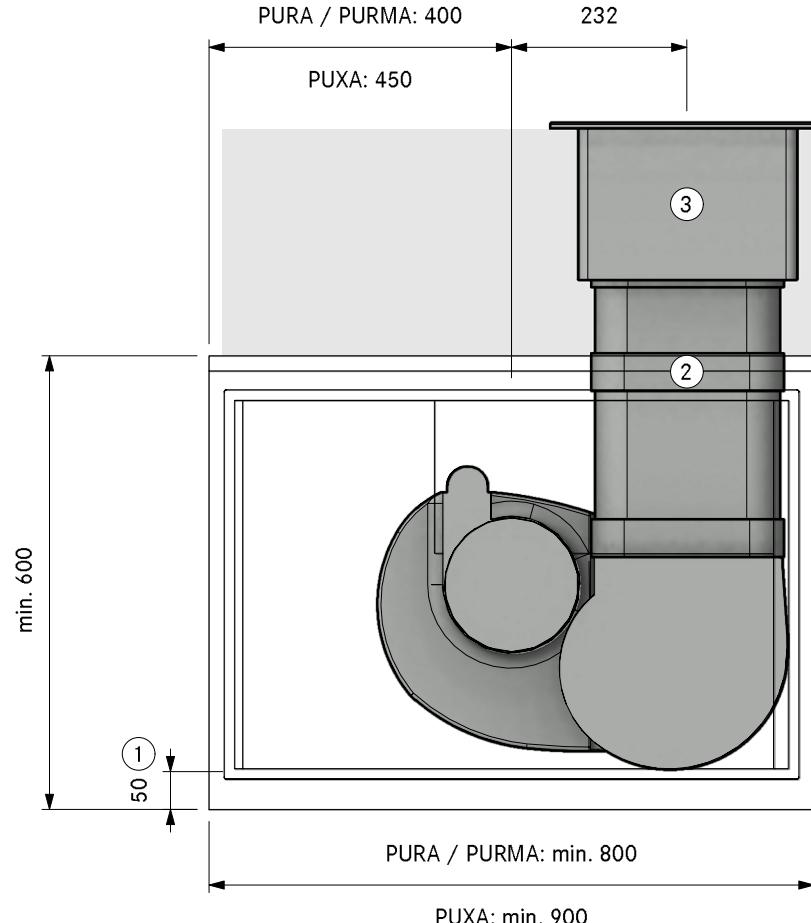


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA10110  
(X/M)Pure Worktop back UEBF

LAYOUT SA

Version, 1.0

**BORA**

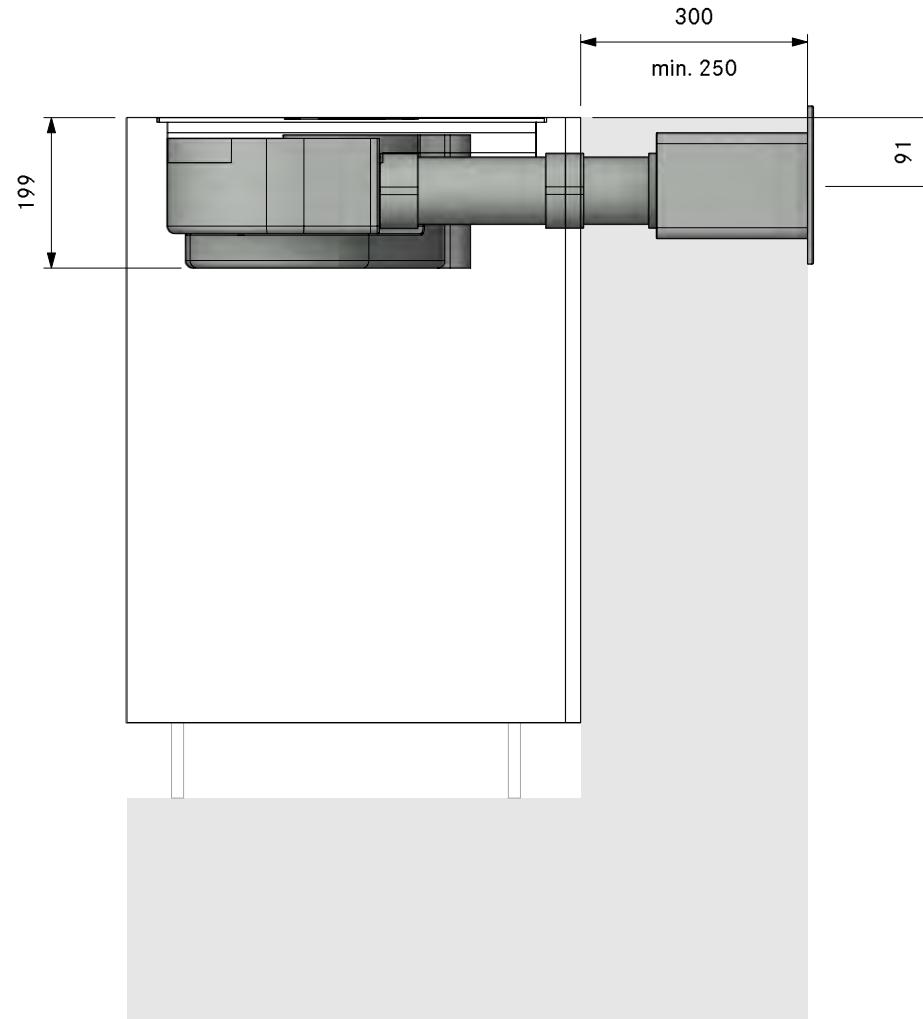

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10110  
(X/M)Pure Worktop back UEBF

LAYOUT

FA


Version, 1.0

**BORA**

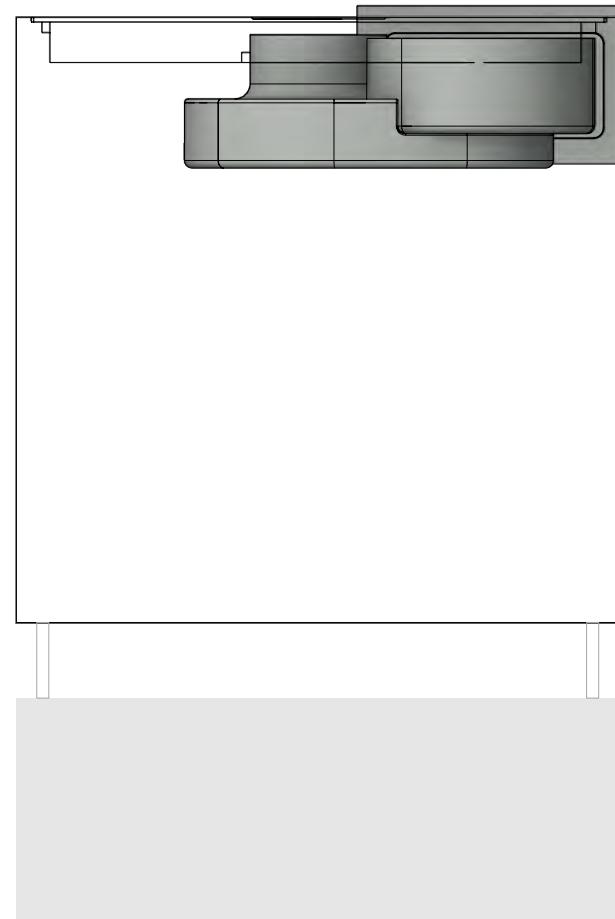

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

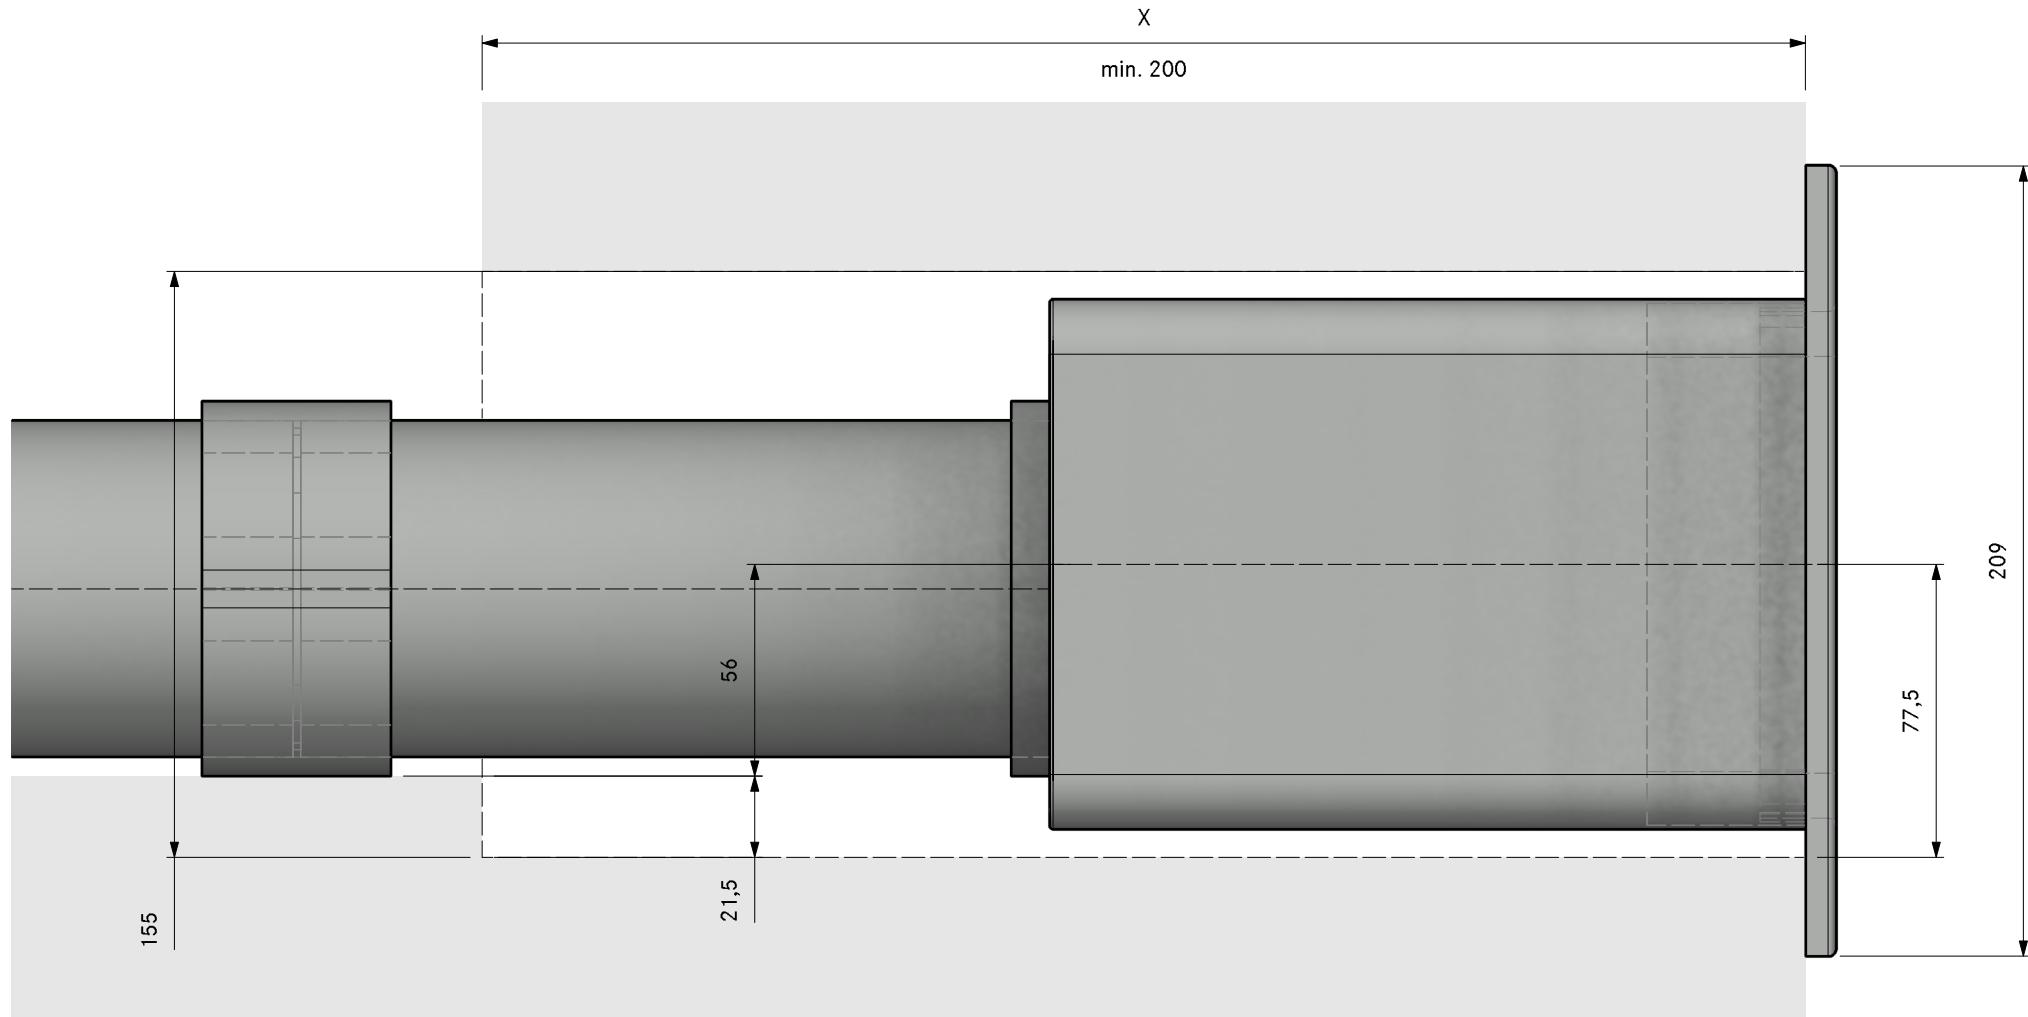




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFAF flat adaptor flexible
1	EFV duct connection flat
1	UEBF 3box wall sleeve
1	UEBFES 3box wall sleeve vent guard
1	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

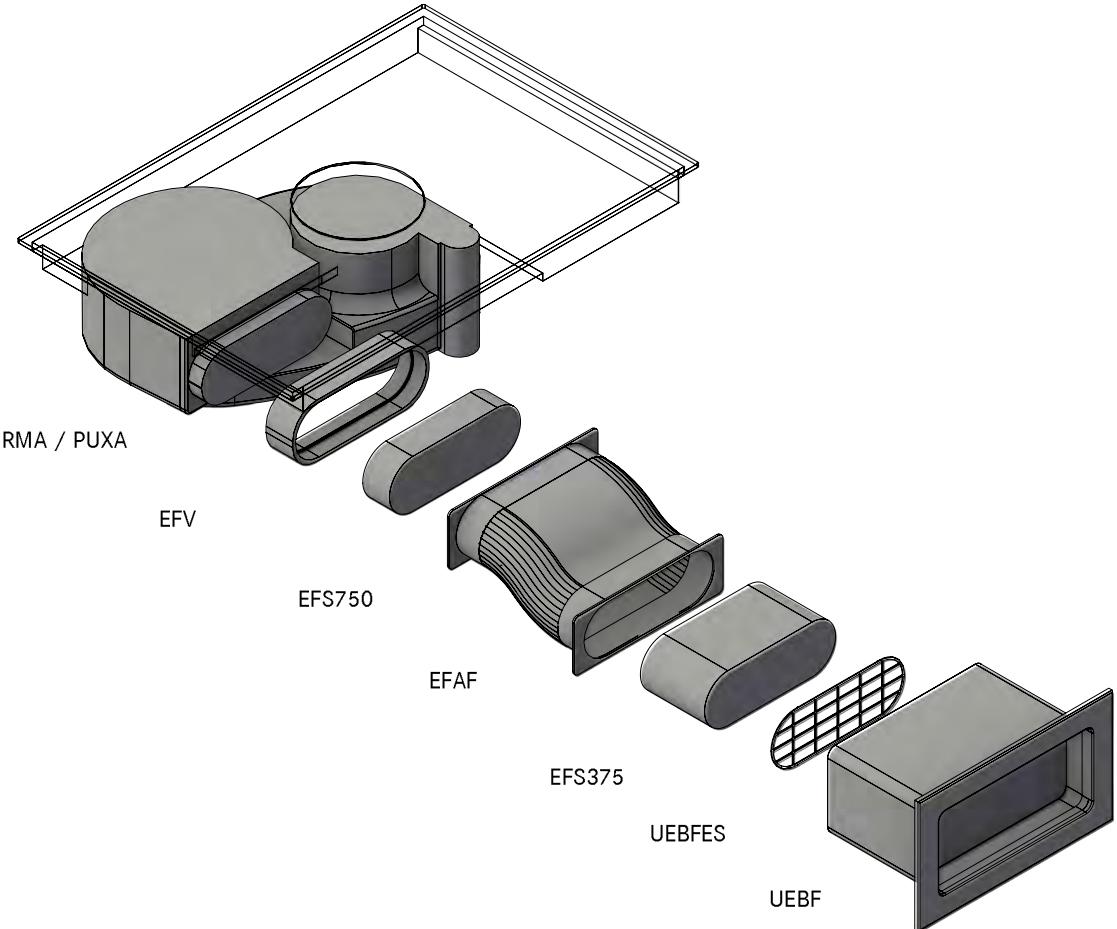

1. Min. 50mm from front edge to cut-out
2. Maximum offset EFAF: height 50mm, side 30mm
3. UEBFES/ UEBRES grill must be installed if the ducting has no bends and the ducting route is  $\leq 900$  mm
4. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

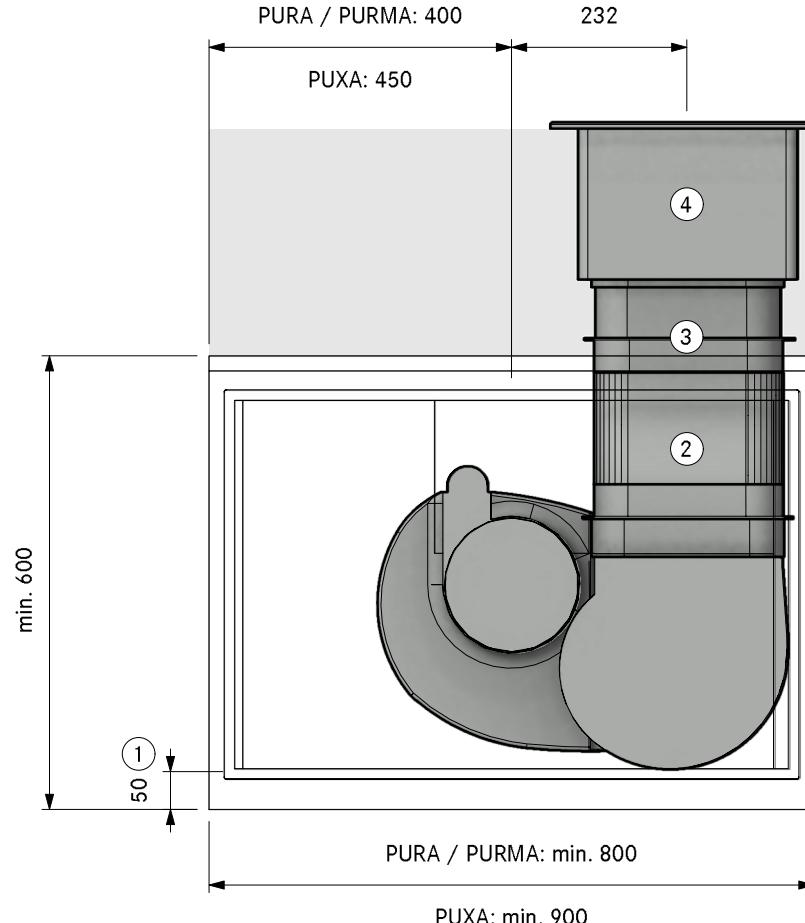

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10115  
(X/M)Pure Worktop back UEBF

LAYOUT

SA

Version, 1.0

**BORA**

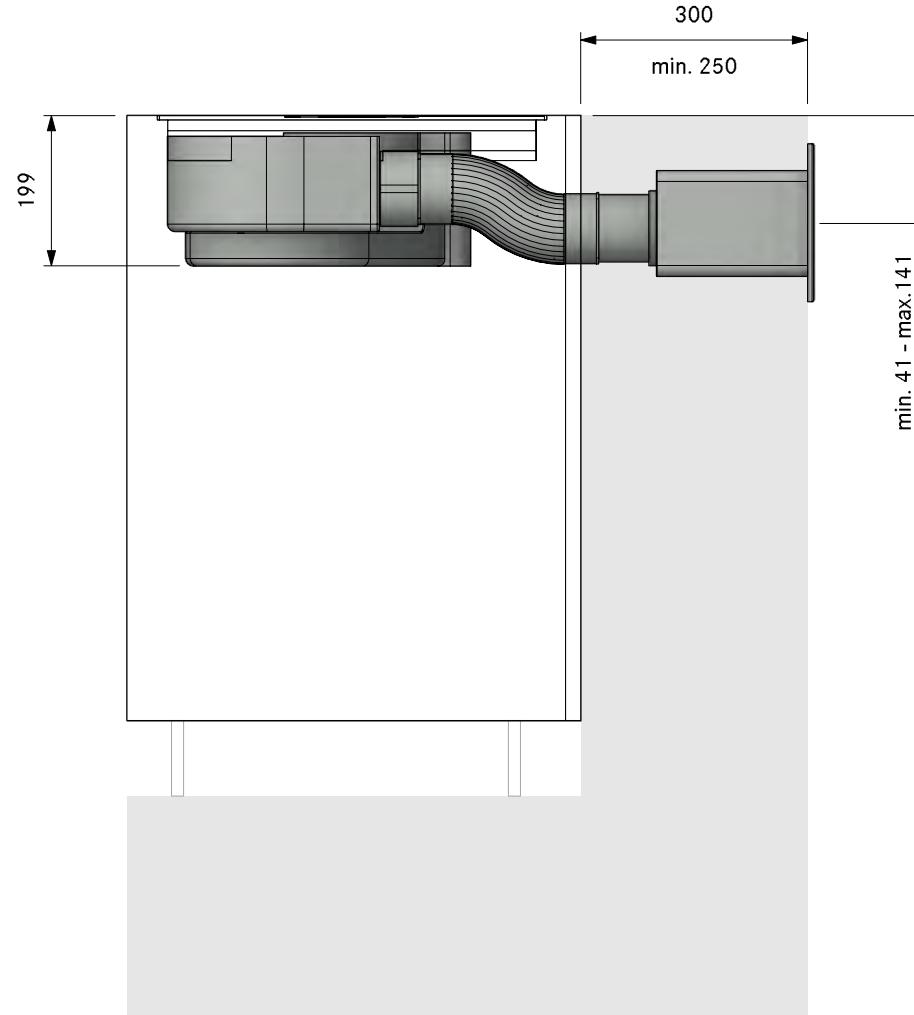

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10115  
(X/M)Pure Worktop back UEBF

LAYOUT

FA

Version, 1.0


**BORA**

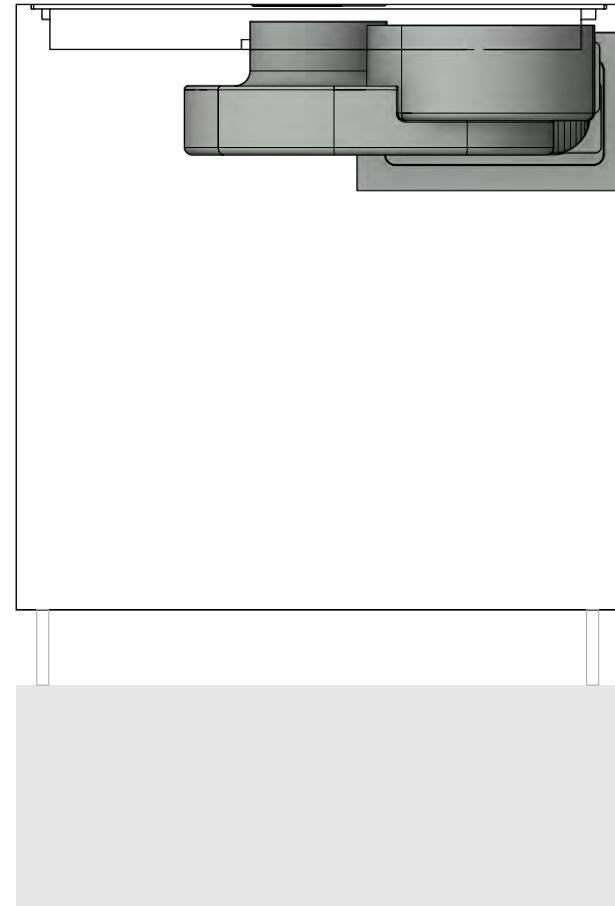

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

Page 4

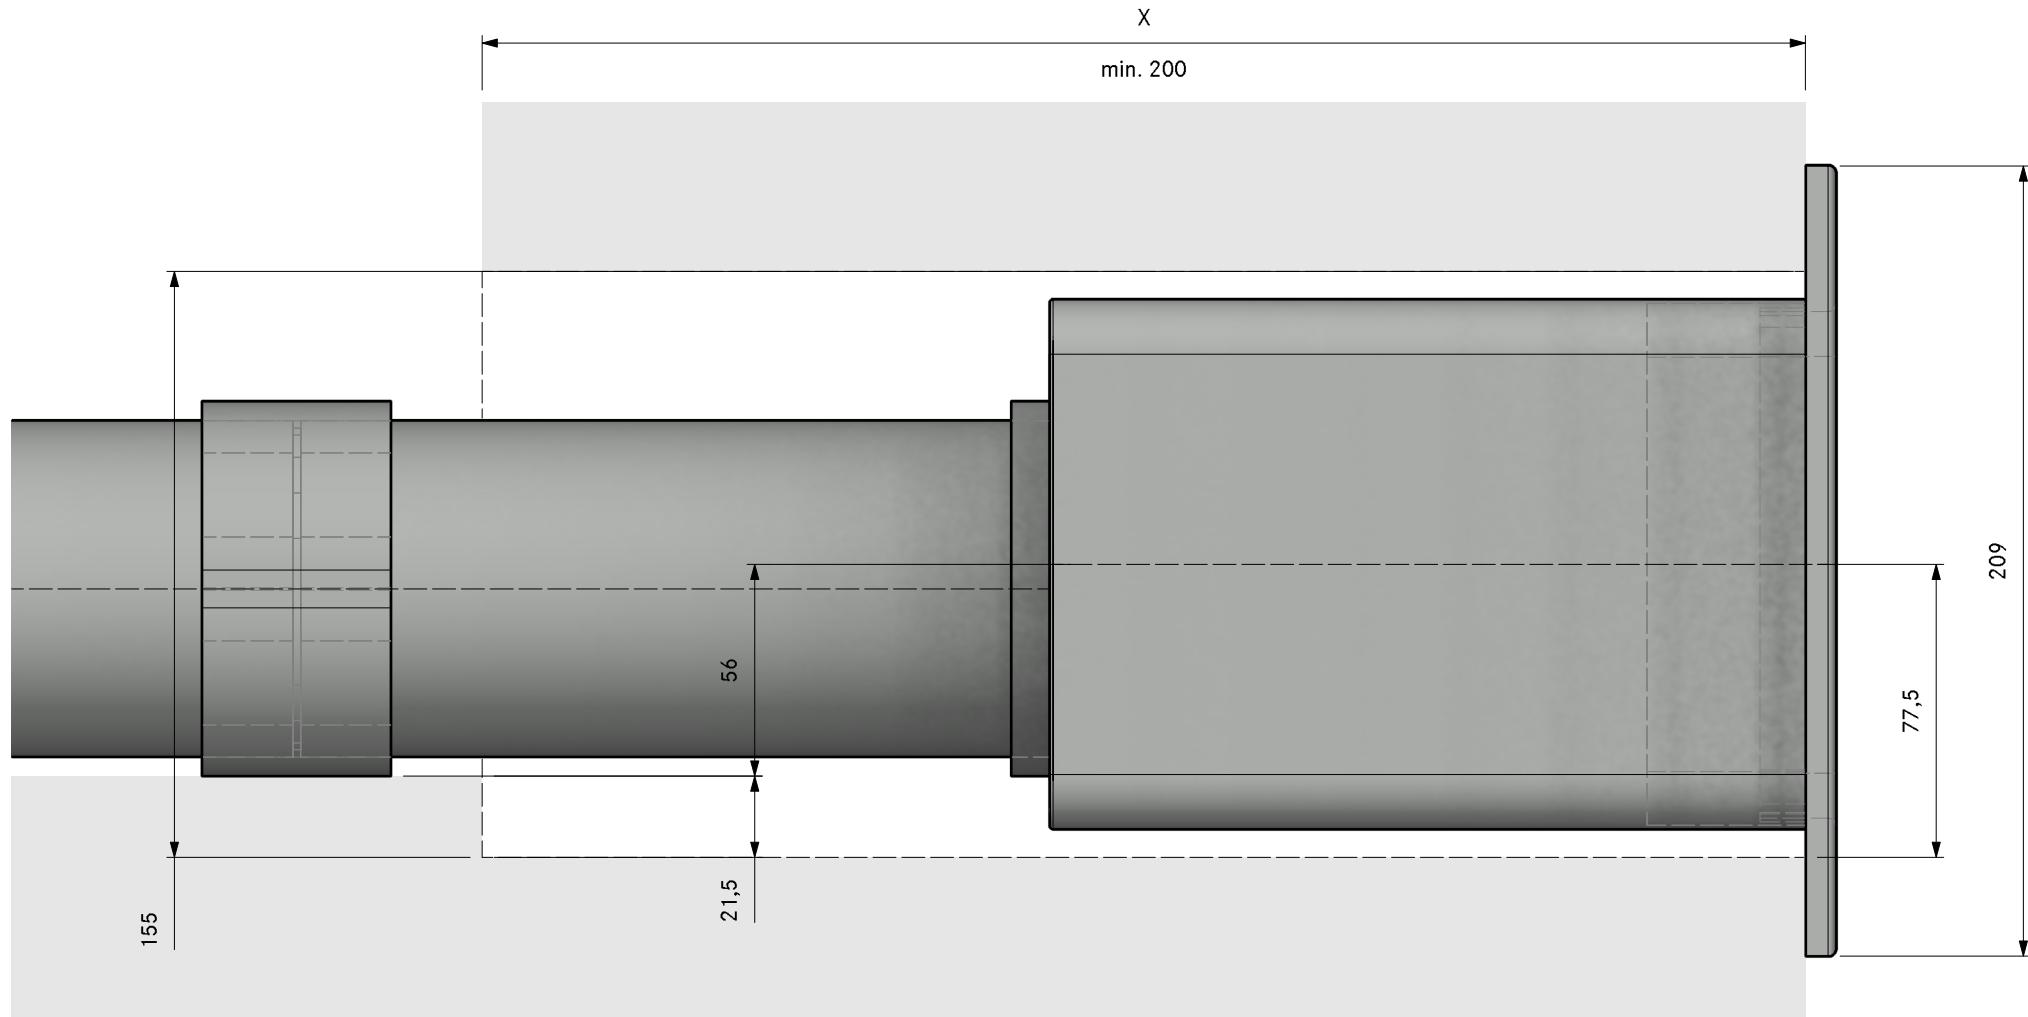



MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10130  
(X/M)Pure Worktop back swan neck UEBF

LAYOUT

3D

Version, 1.0

**BORA**

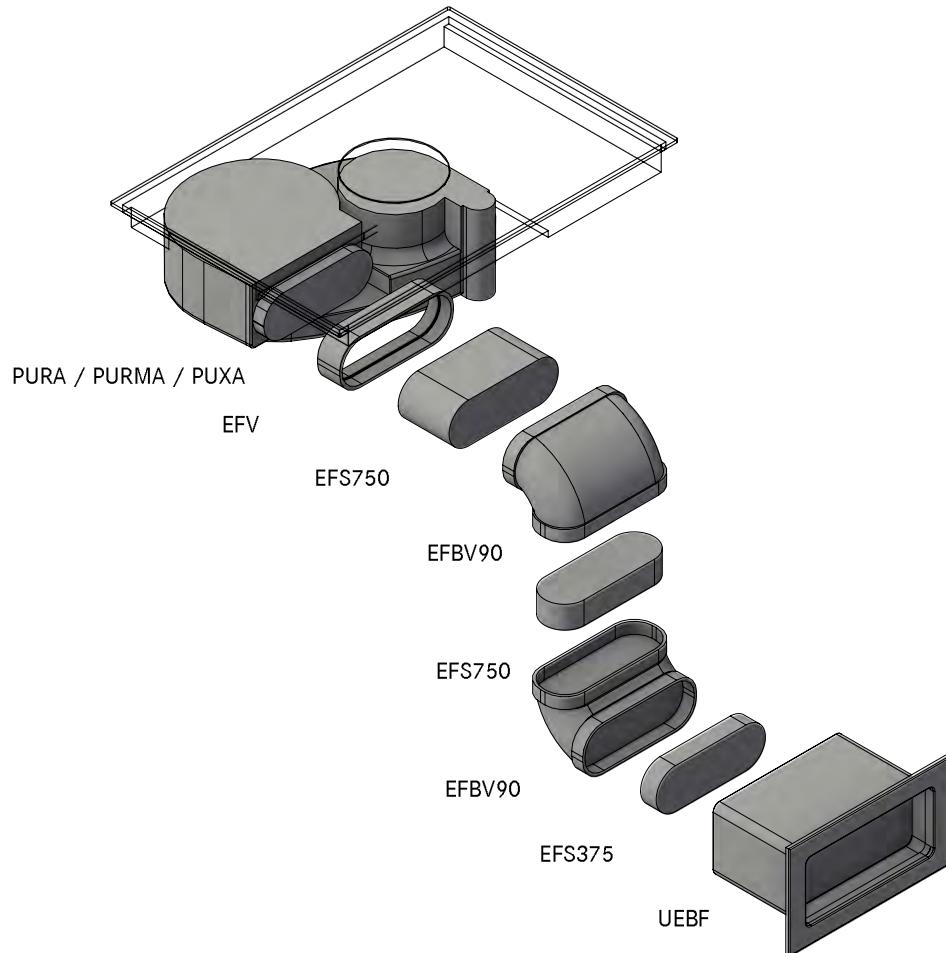

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
1	EFV duct connection flat
1	UEBF 3box wall sleeve
1	EFS750 shallow duct with partition 750mm


*Please check for accuracy. Seals included. Are optically not displayed.*

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA10130  
(X/M)Pure Worktop back swan neck UEBF

Version, 1.0

**BORA**

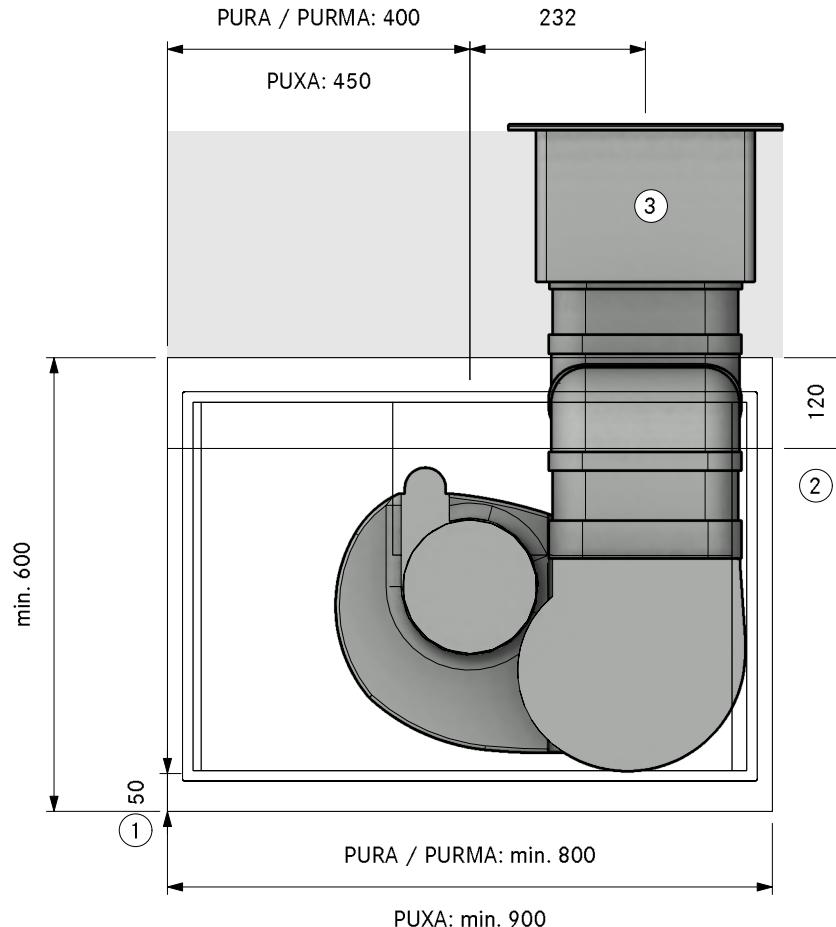


1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA10130  
(X/M)Pure Worktop back swan neck UEBF

Version, 1.0

**BORA**

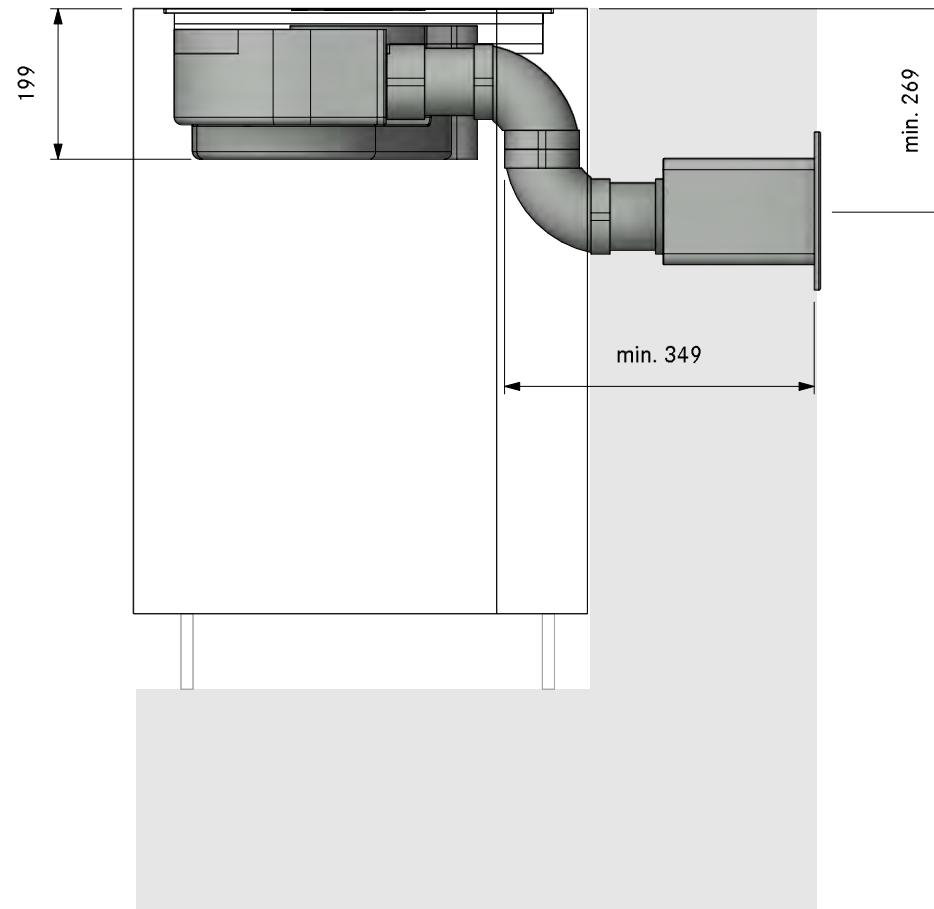


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT


PA10130  
(X/M)Pure Worktop back swan neck UEBF

Version, 1.0

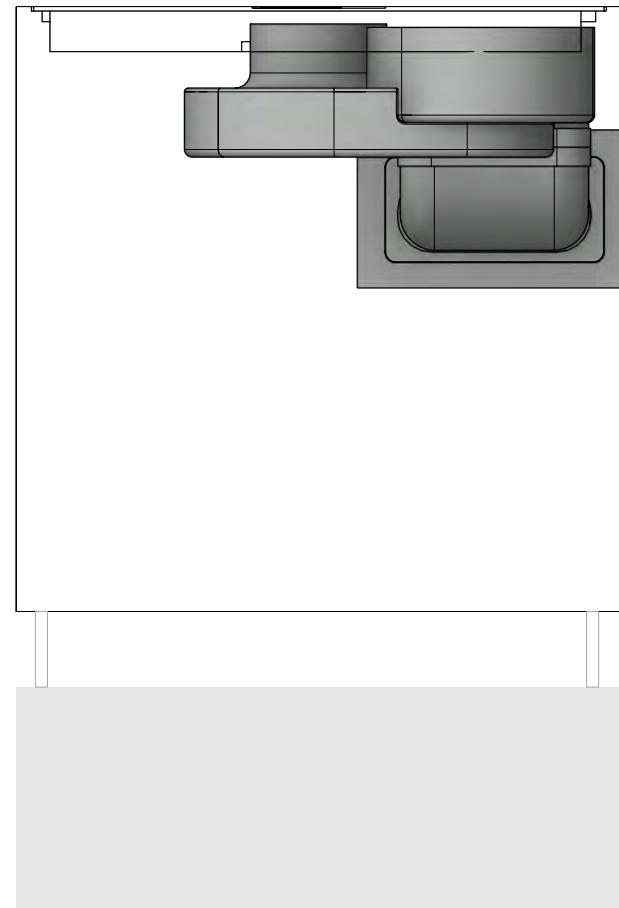

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

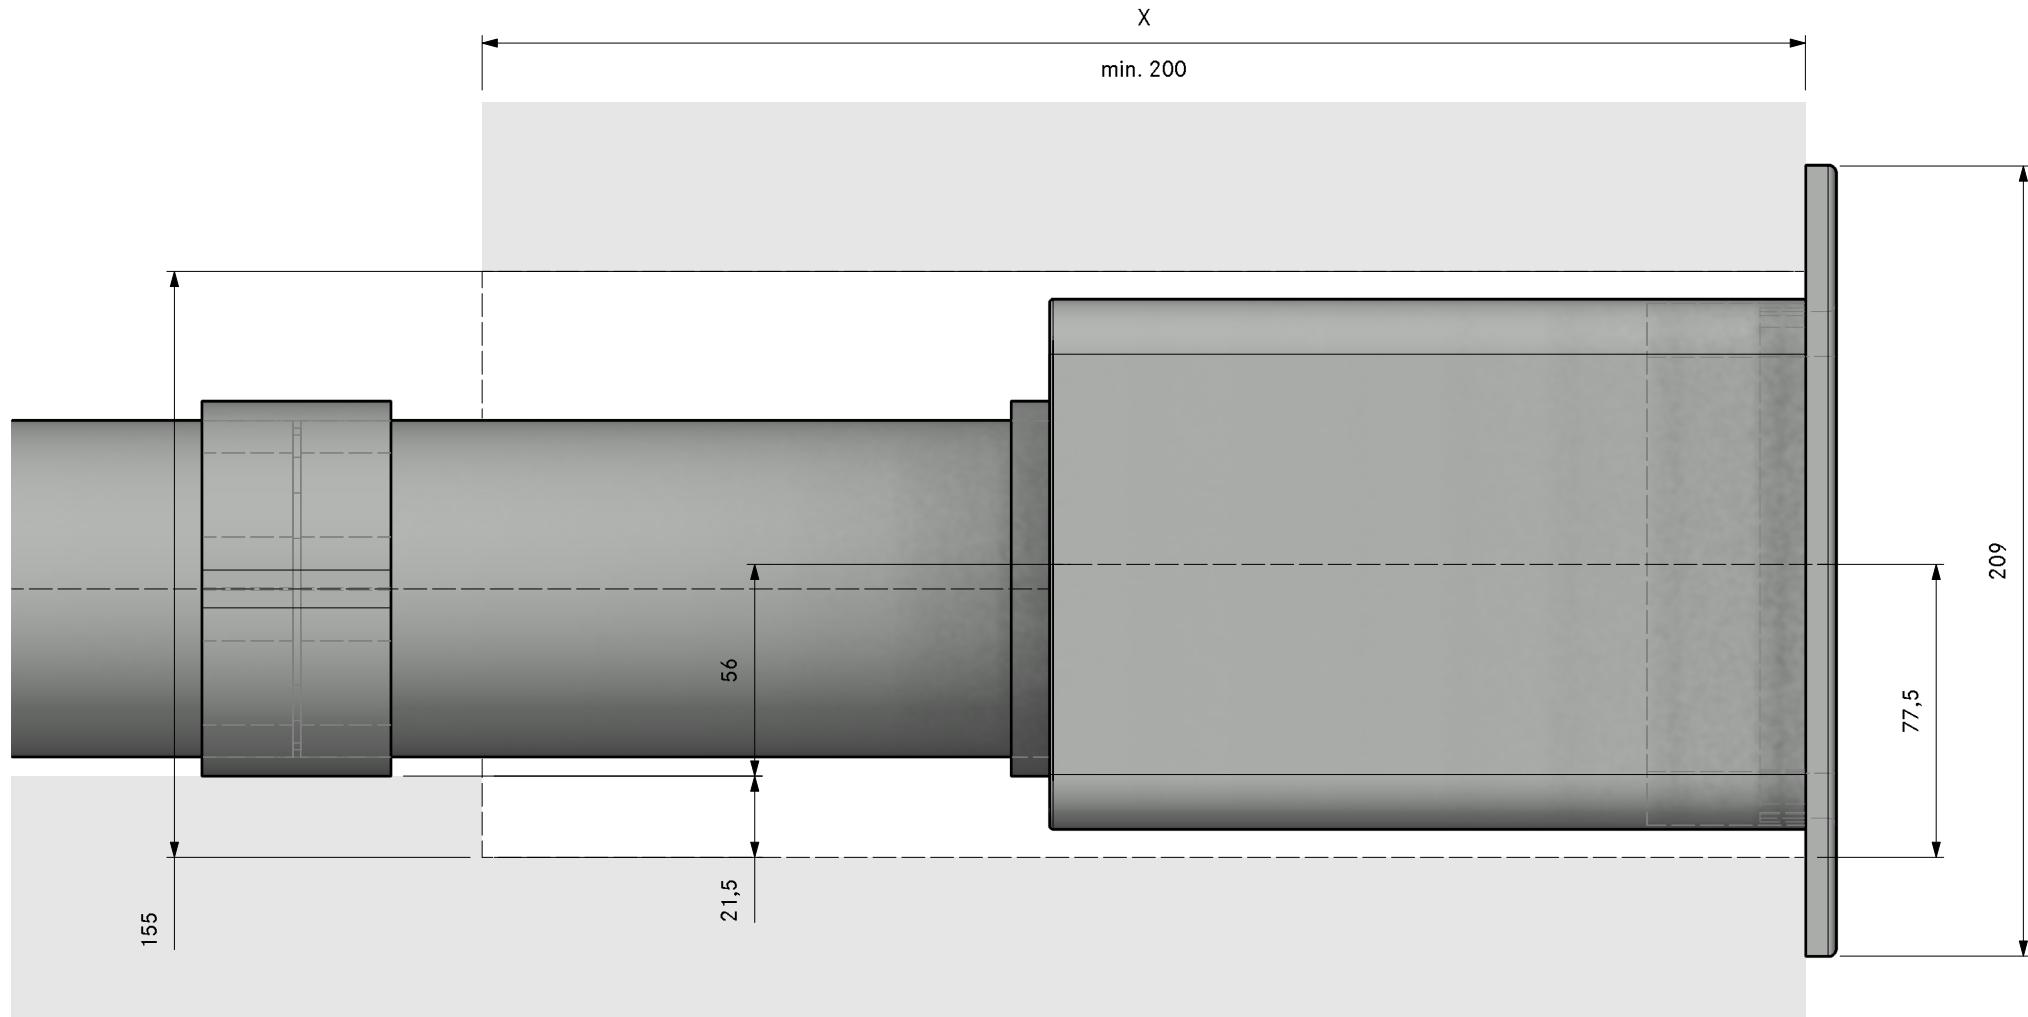



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA10120  
(X/M)Pure Worktop back UEBR


LAYOUT 3D

Version, 1.0

**BORA**

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFRG bridge flat round straight
1	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	UEBRES 3box wall sleeve round vent guard
1	ER750 round duct 750mm
1	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

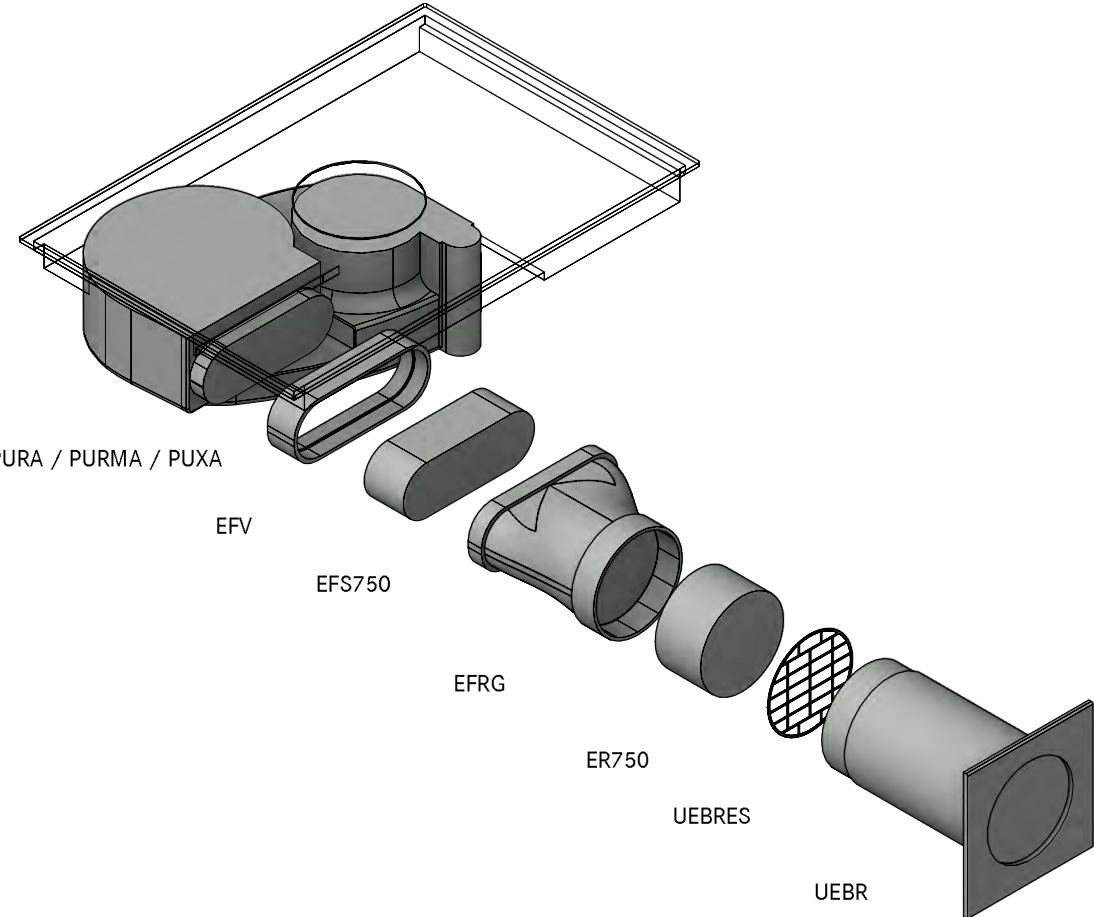

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA10120  
(X/M)Pure Worktop back UEBR

LAYOUT

GR

Version, 1.0

**BORA**

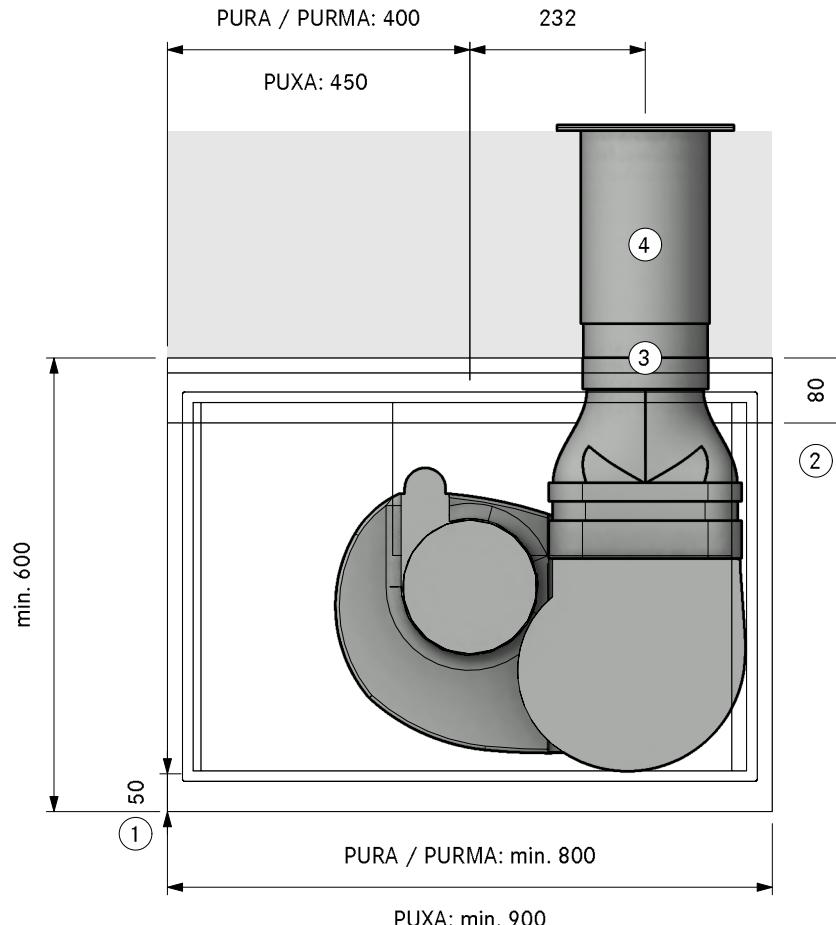

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. UEBFES / UEBRES grill must be installed if the ducting has no bends and the ducting route is  $\leq 900$  mm
4. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA10120  
(X/M)Pure Worktop back UEBR

LAYOUT SA

Version, 1.0

**BORA**

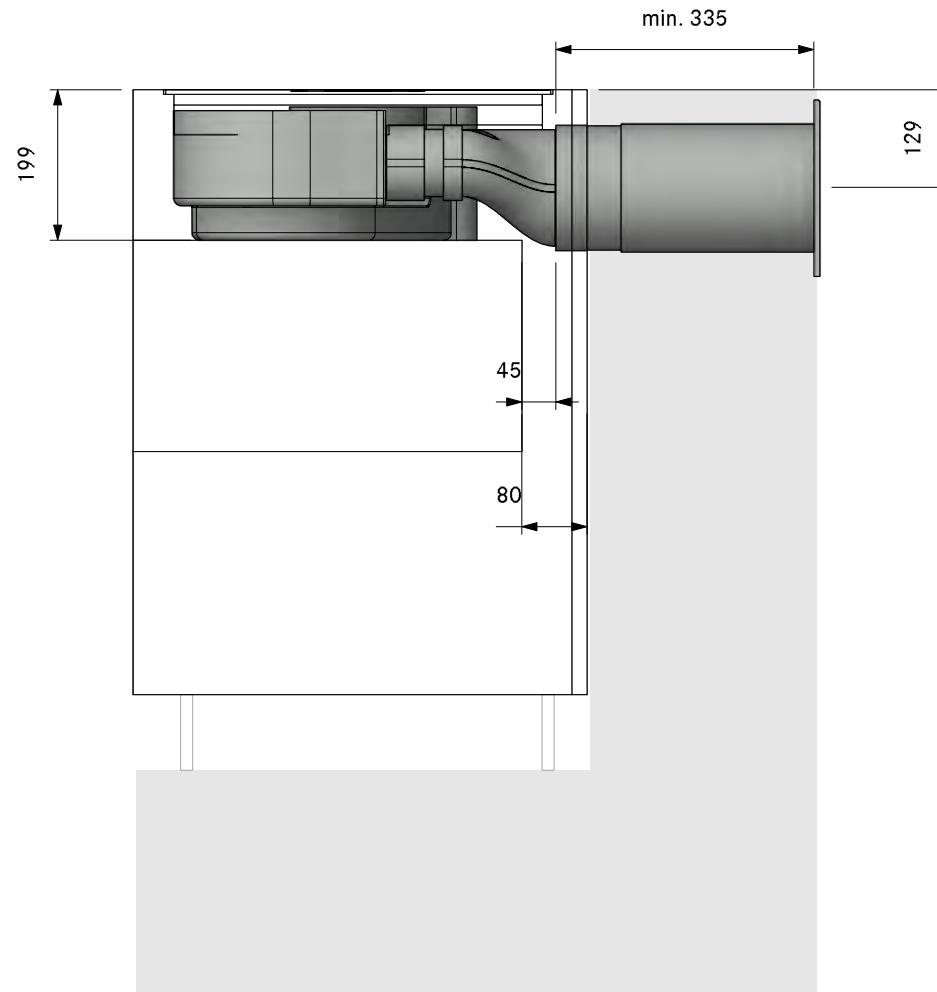

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA10120  
(X/M)Pure Worktop back UEBR

LAYOUT FA

Version, 1.0


**BORA**

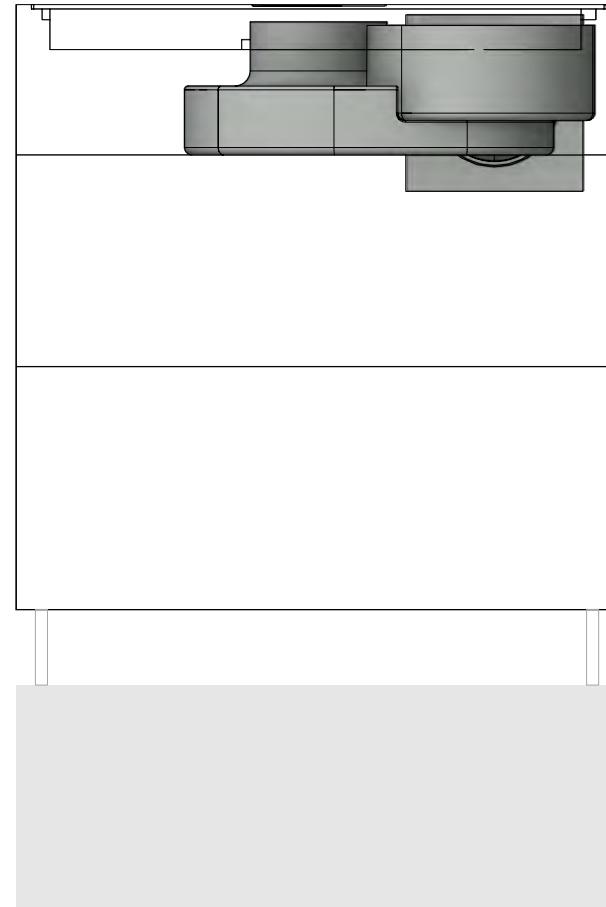

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

Detail

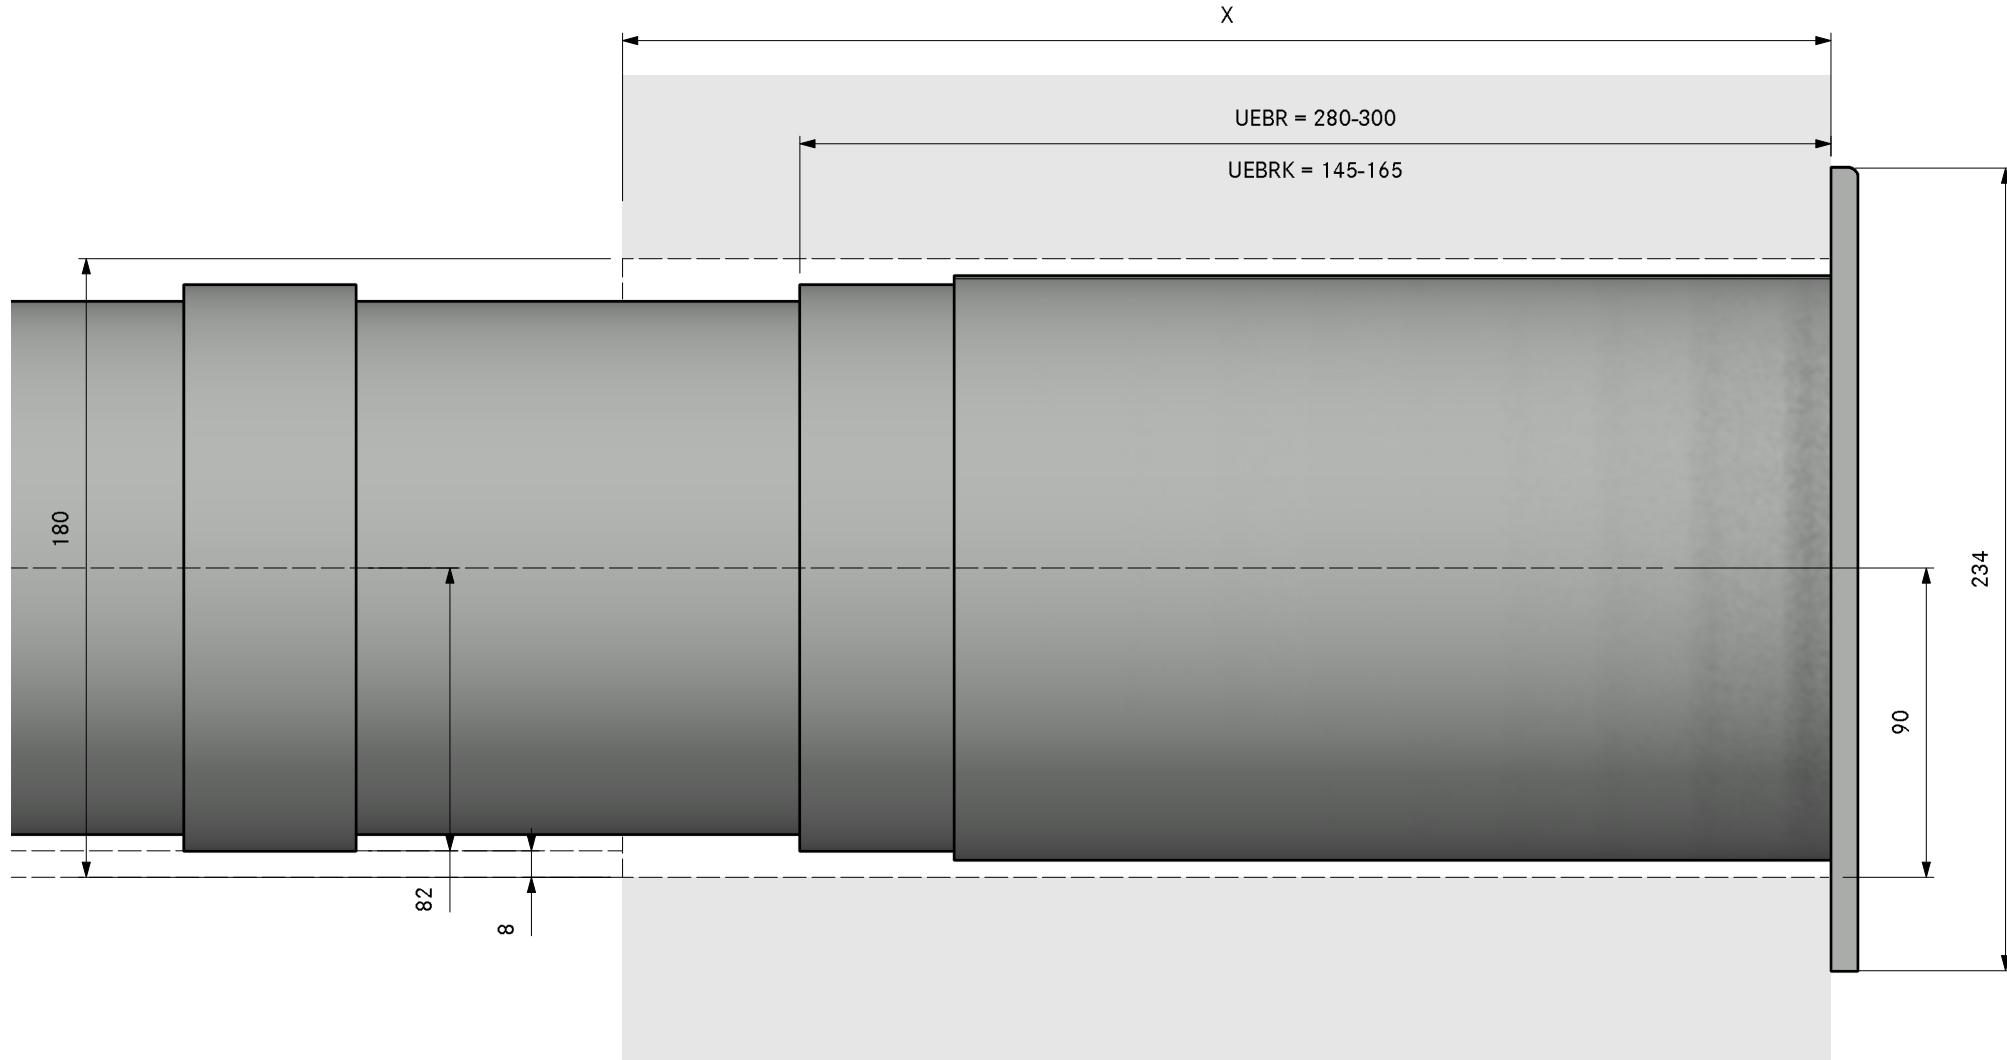




MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA10140  
(X/M)Pure Worktop back swan neck UEBR

Version, 1.0

**BORA**

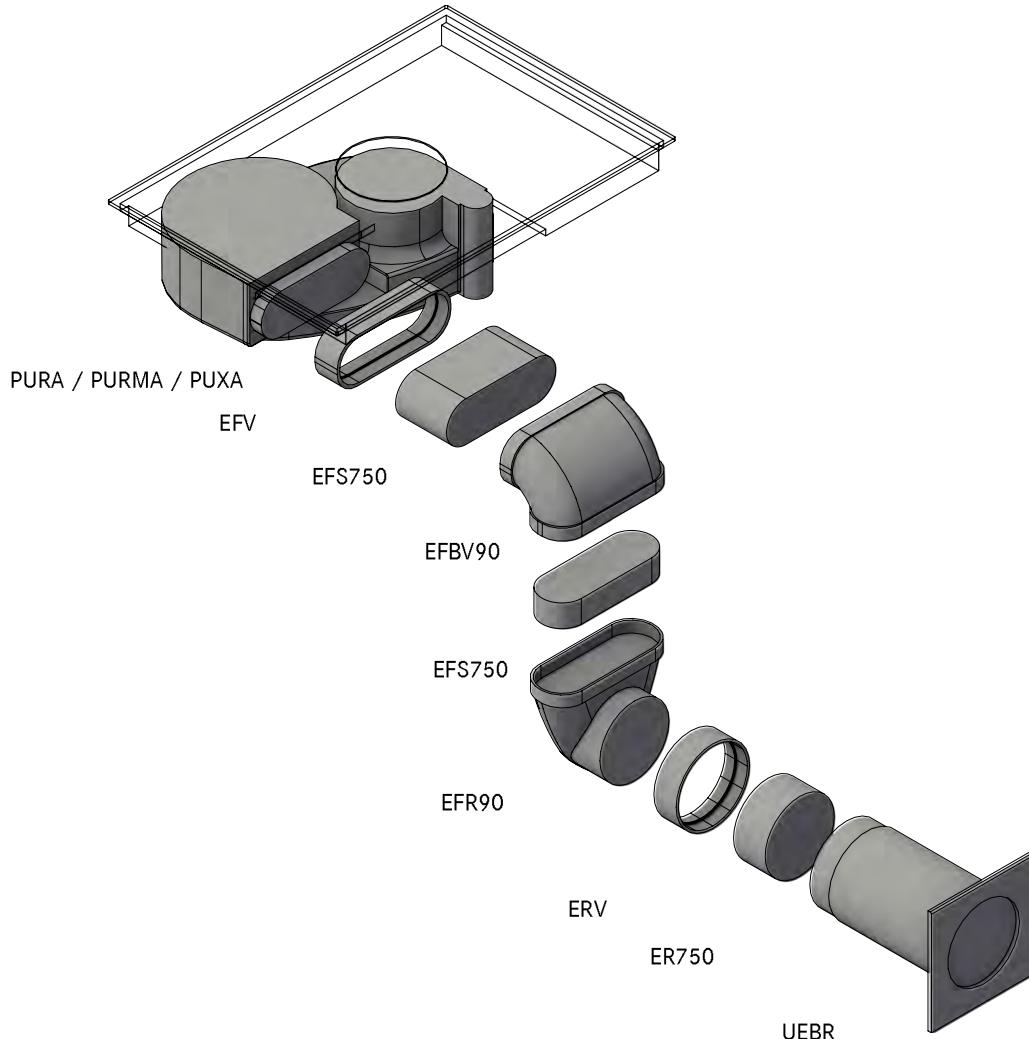

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
1	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
1	EFS750 shallow duct with partition 750mm

*Please check for accuracy. Seals included. Are optically not displayed.*


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA10140  
(X/M)Pure Worktop back swan neck UEBR

LAYOUT GR

Version, 1.0

**BORA**

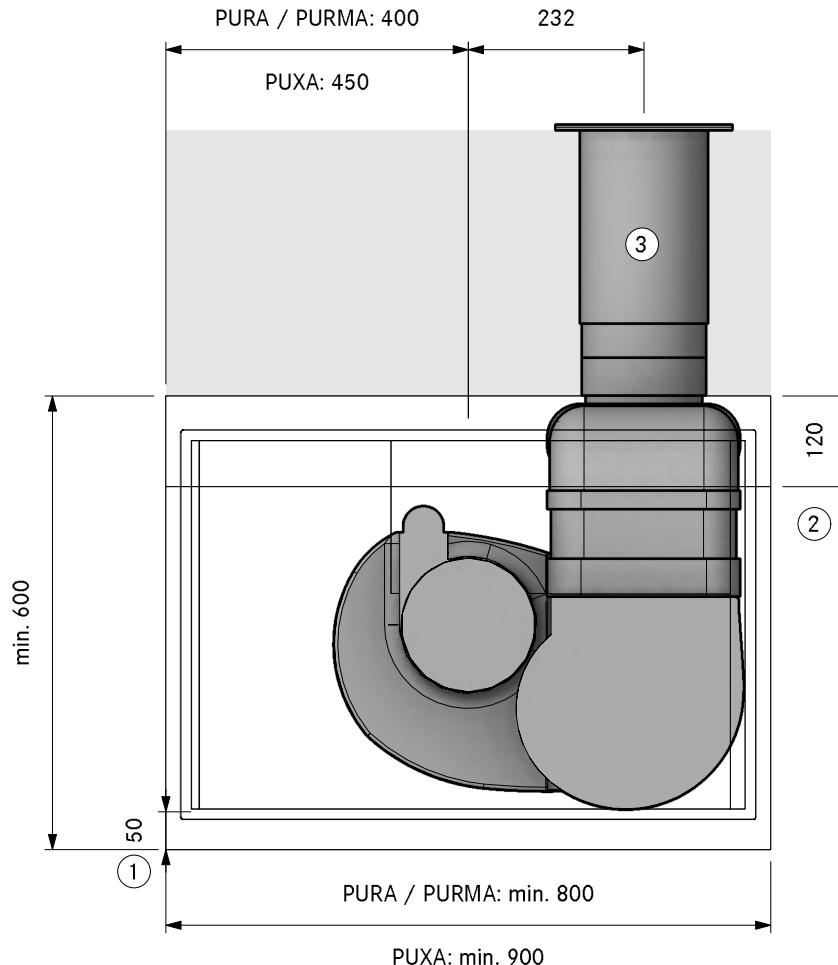


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA10140  
(X/M)Pure Worktop back swan neck UEBR

Version, 1.0

**BORA**

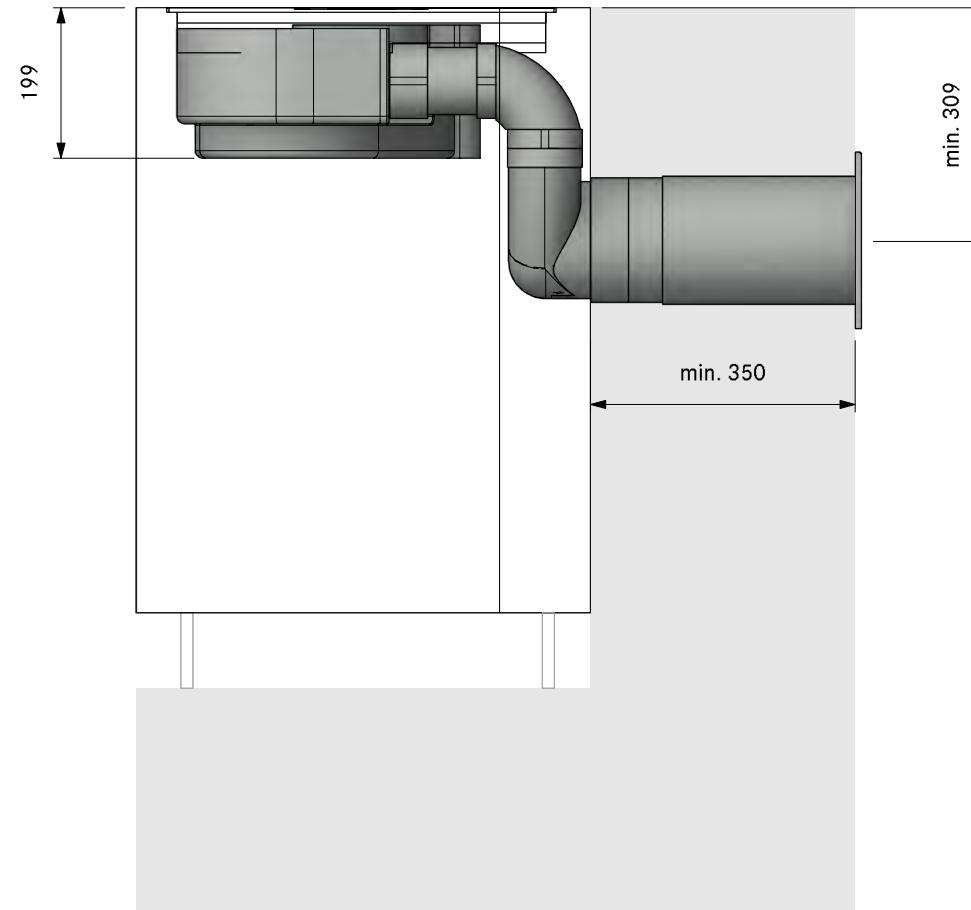

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA10140  
(X/M)Pure Worktop back swan neck UEBR

LAYOUT

FA

Version, 1.0


**BORA**

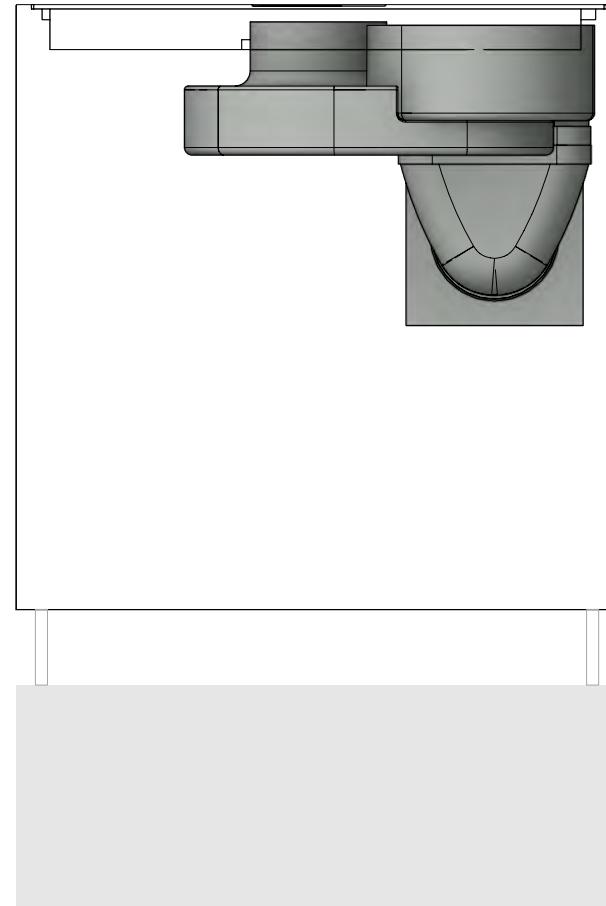

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

Detail

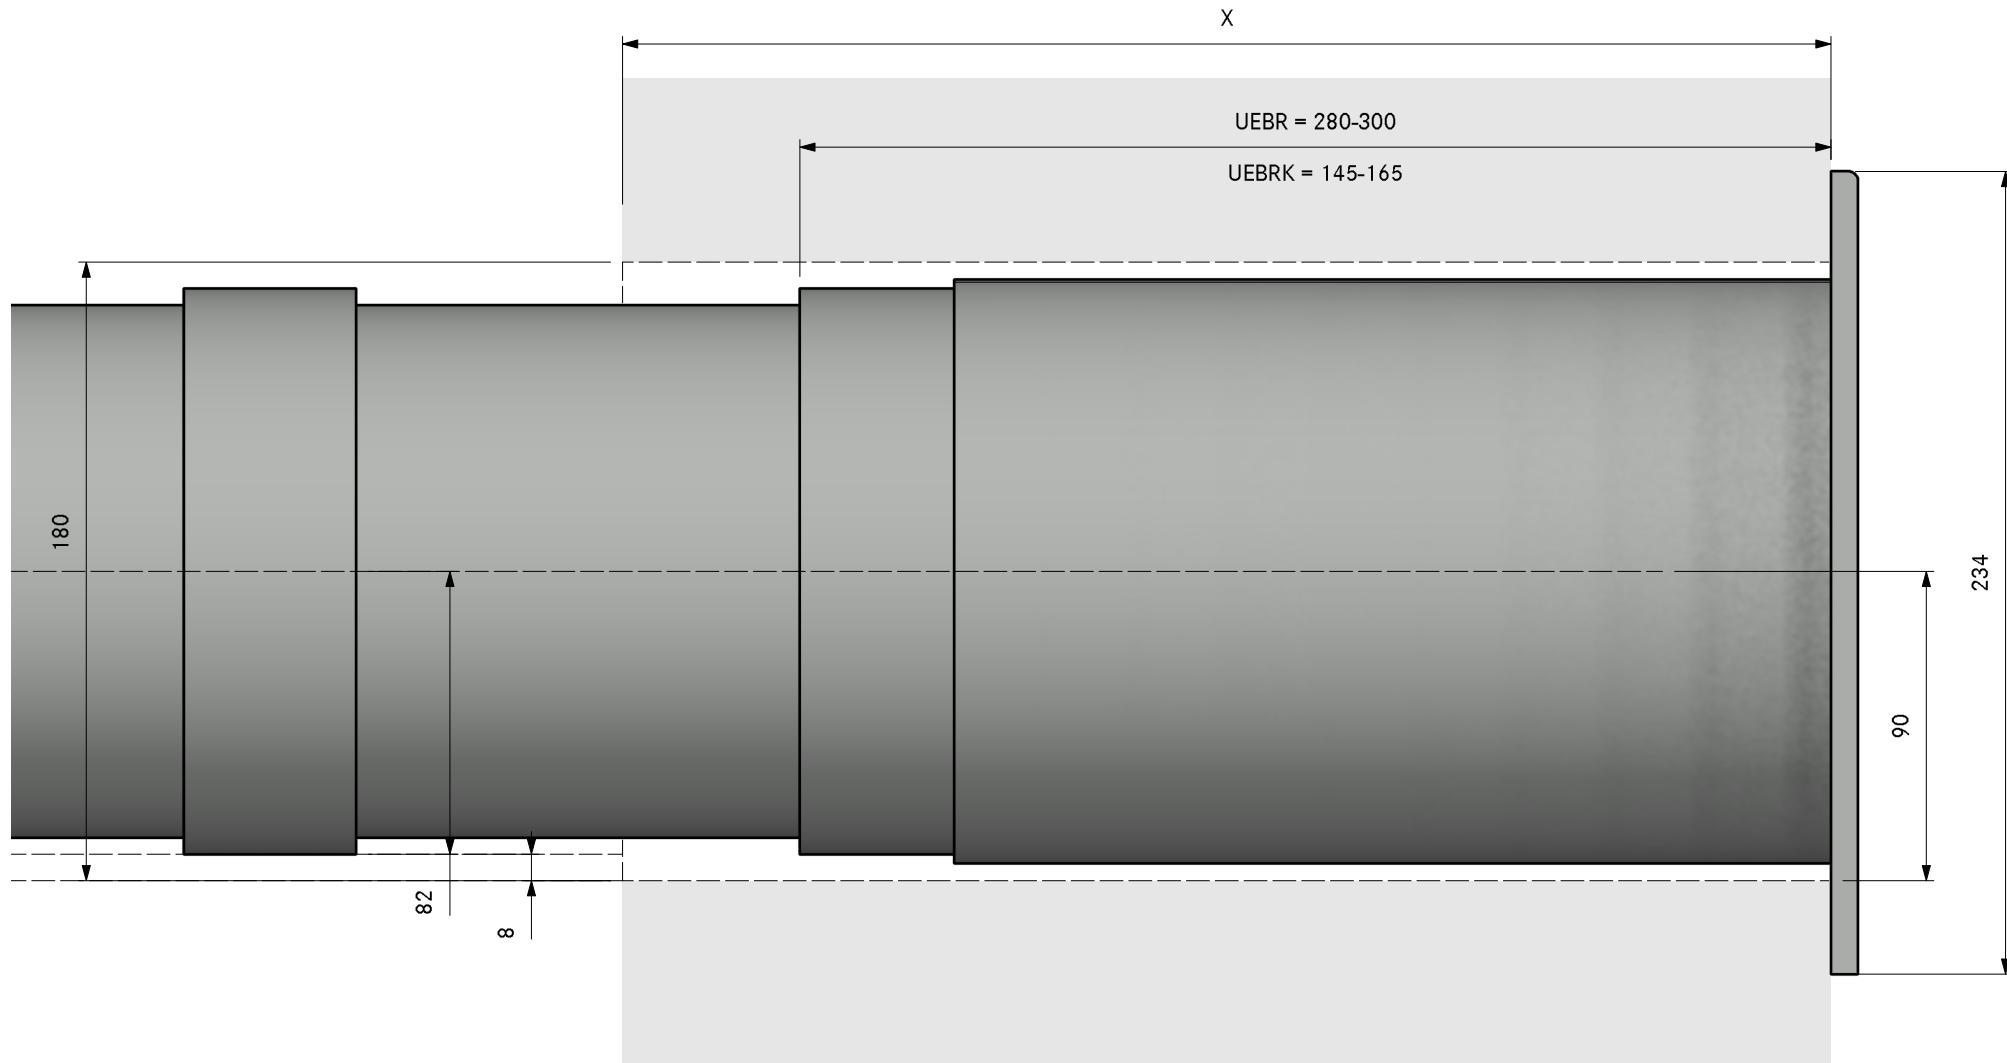



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
1	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
1	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
2	EFS750 shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.	

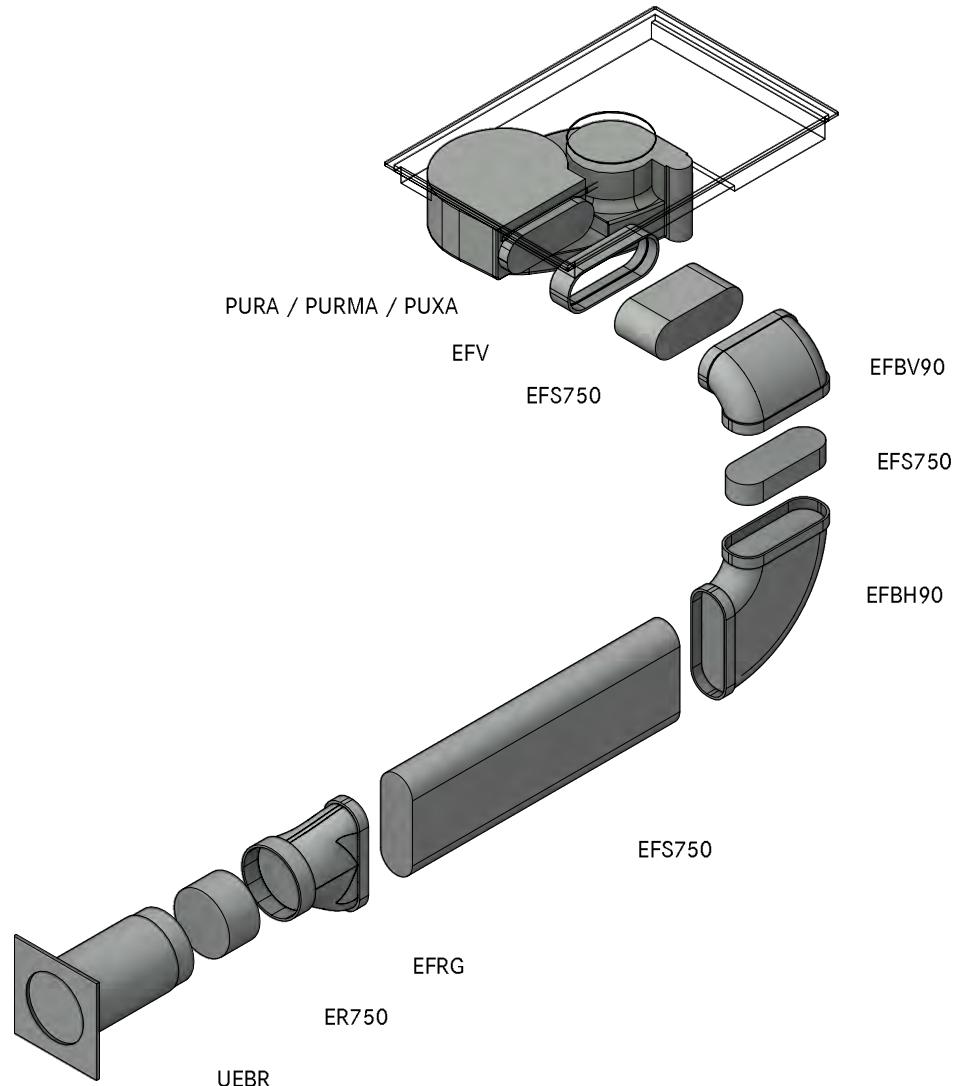

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA10224  
(X/M)Pure Worktop right UEBR upright

LAYOUT

GR

Version, 1.0

**BORA**

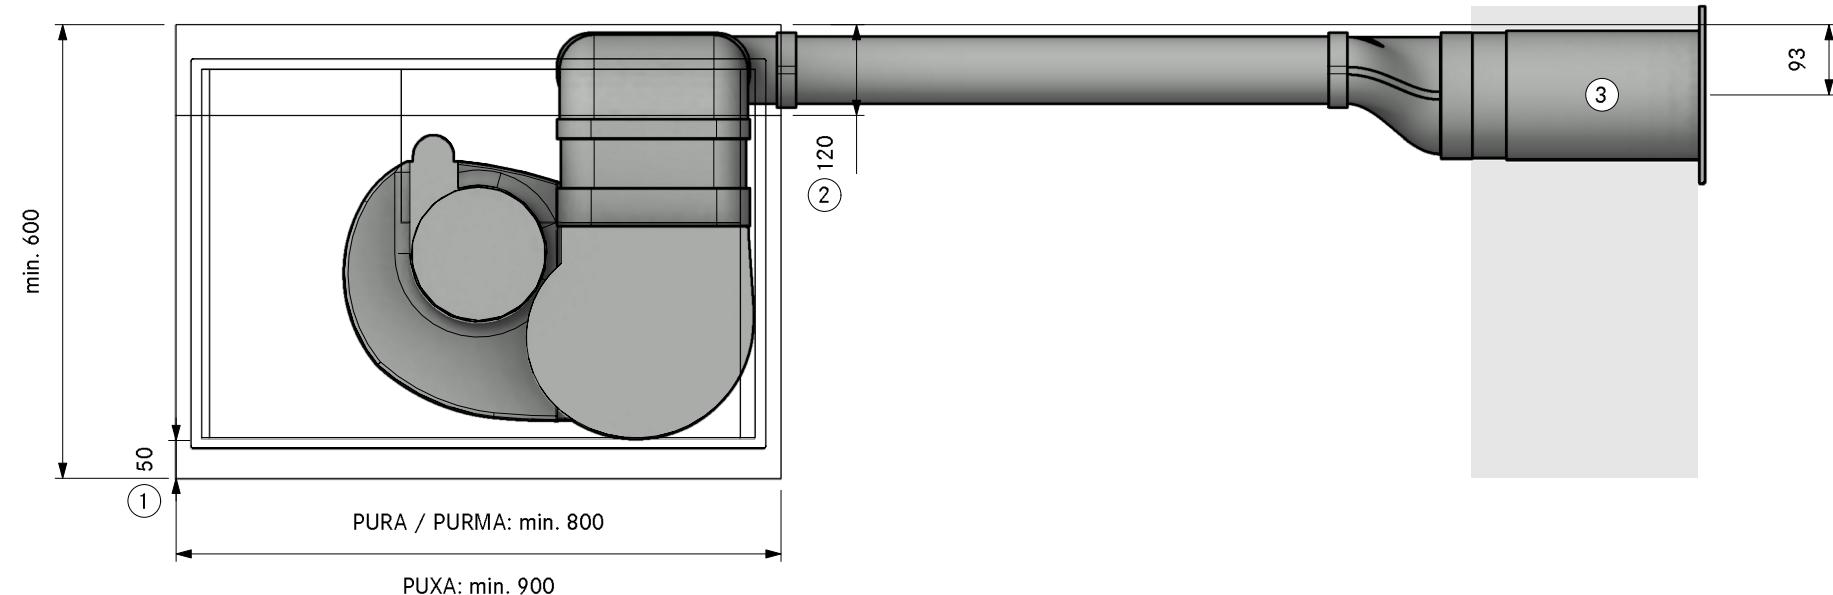

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA10224  
(X/M)Pure Worktop right UEBR upright

LAYOUT SA

Version, 1.0

**BORA**

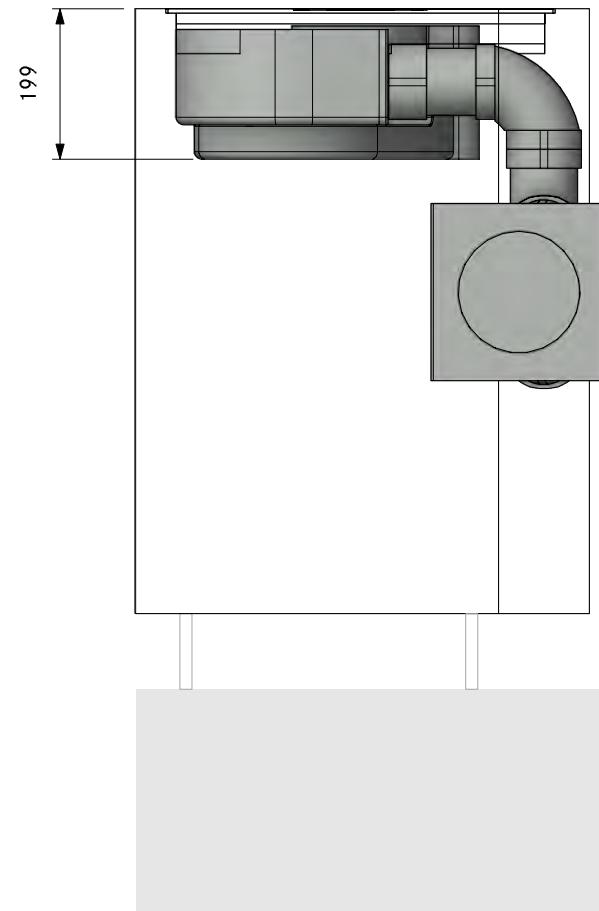

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10224  
(X/M)Pure Worktop right UEBR upright

LAYOUT

FA

Version, 1.0

**BORA**

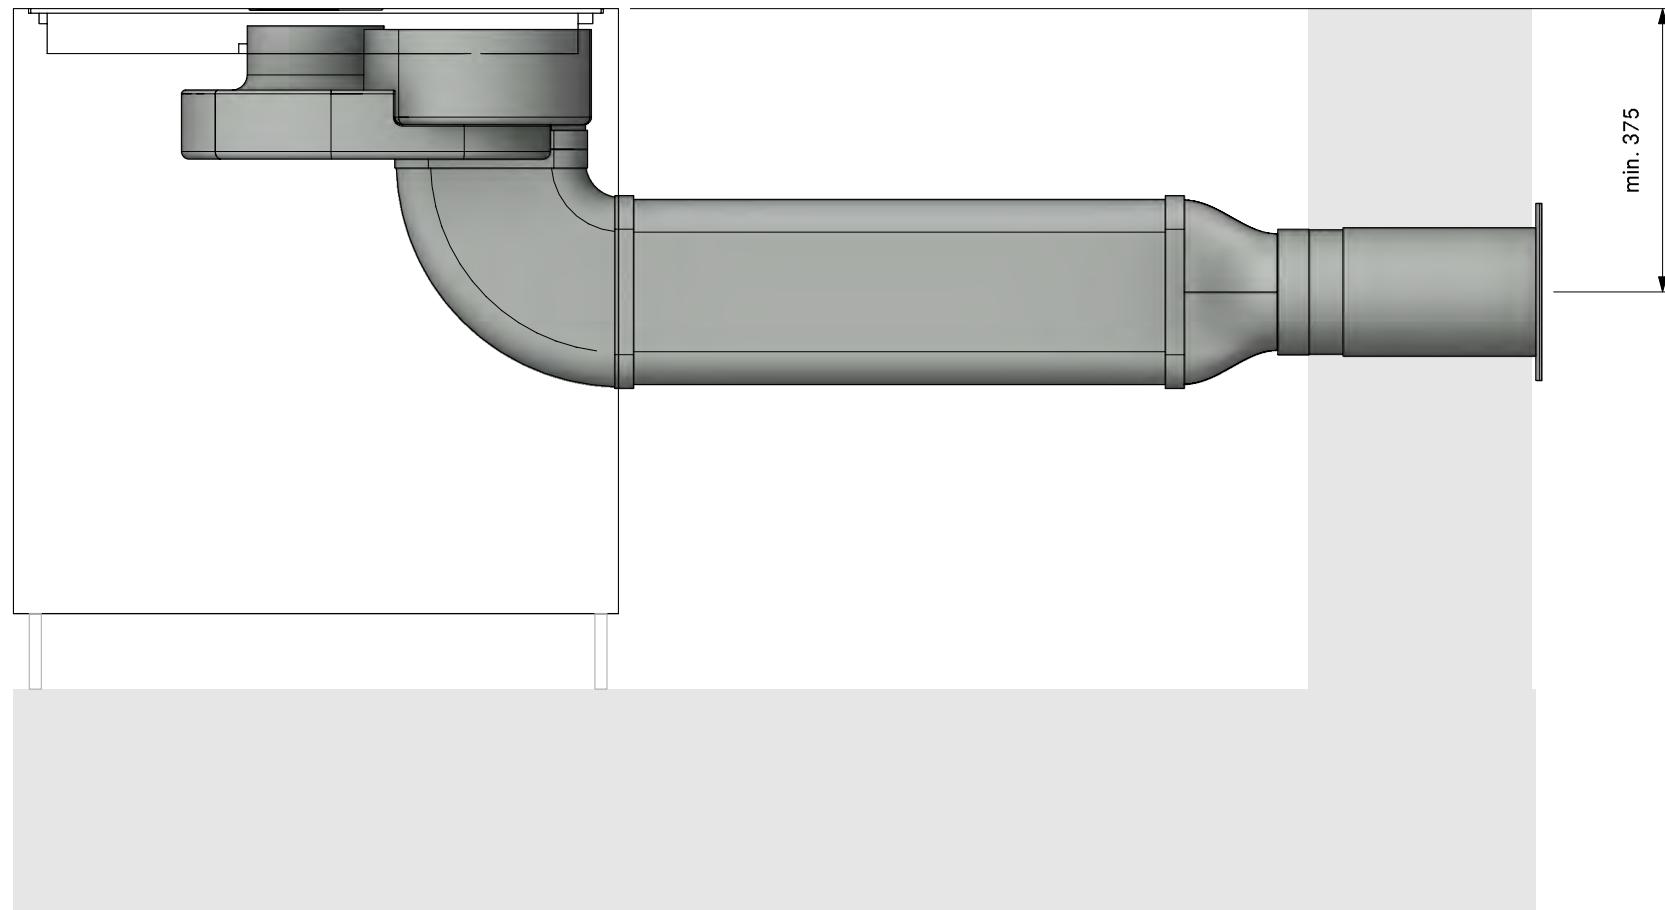


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

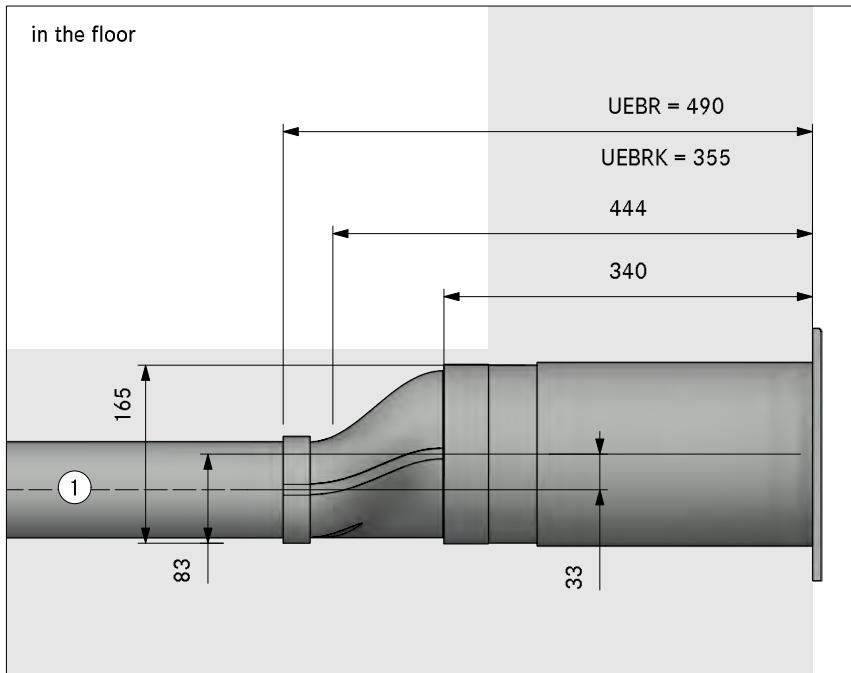

in the plinth area

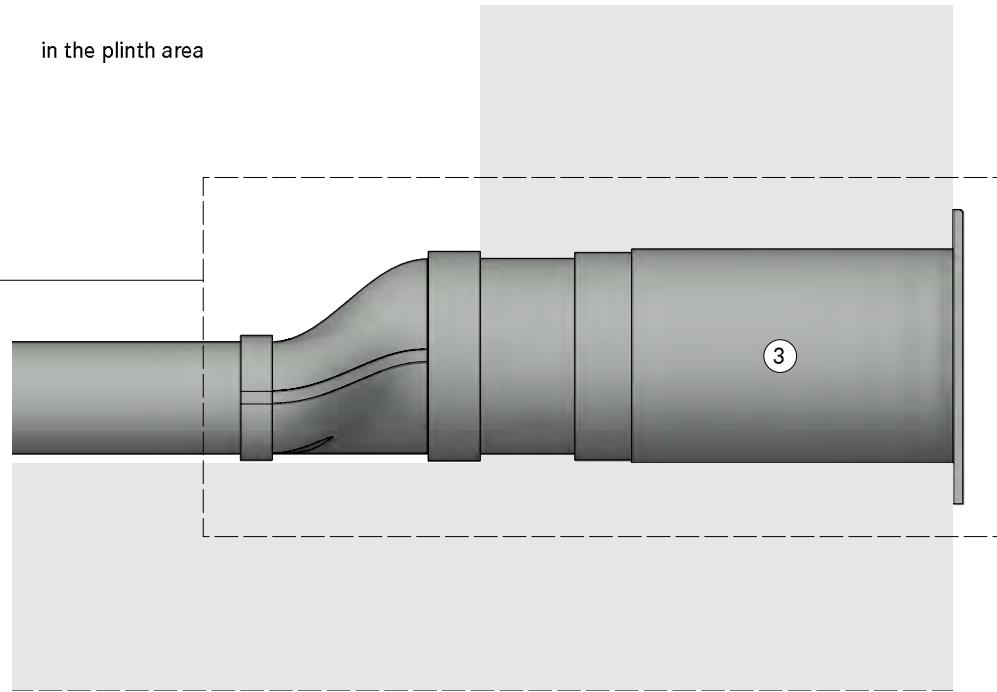

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

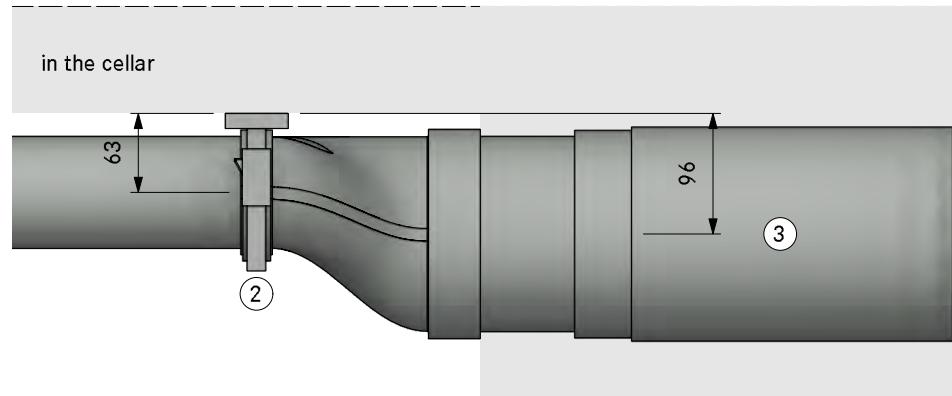




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA10424  
(X/M)Pure Worktop left UEBR upright

LAYOUT 3D

Version, 1.0

**BORA**

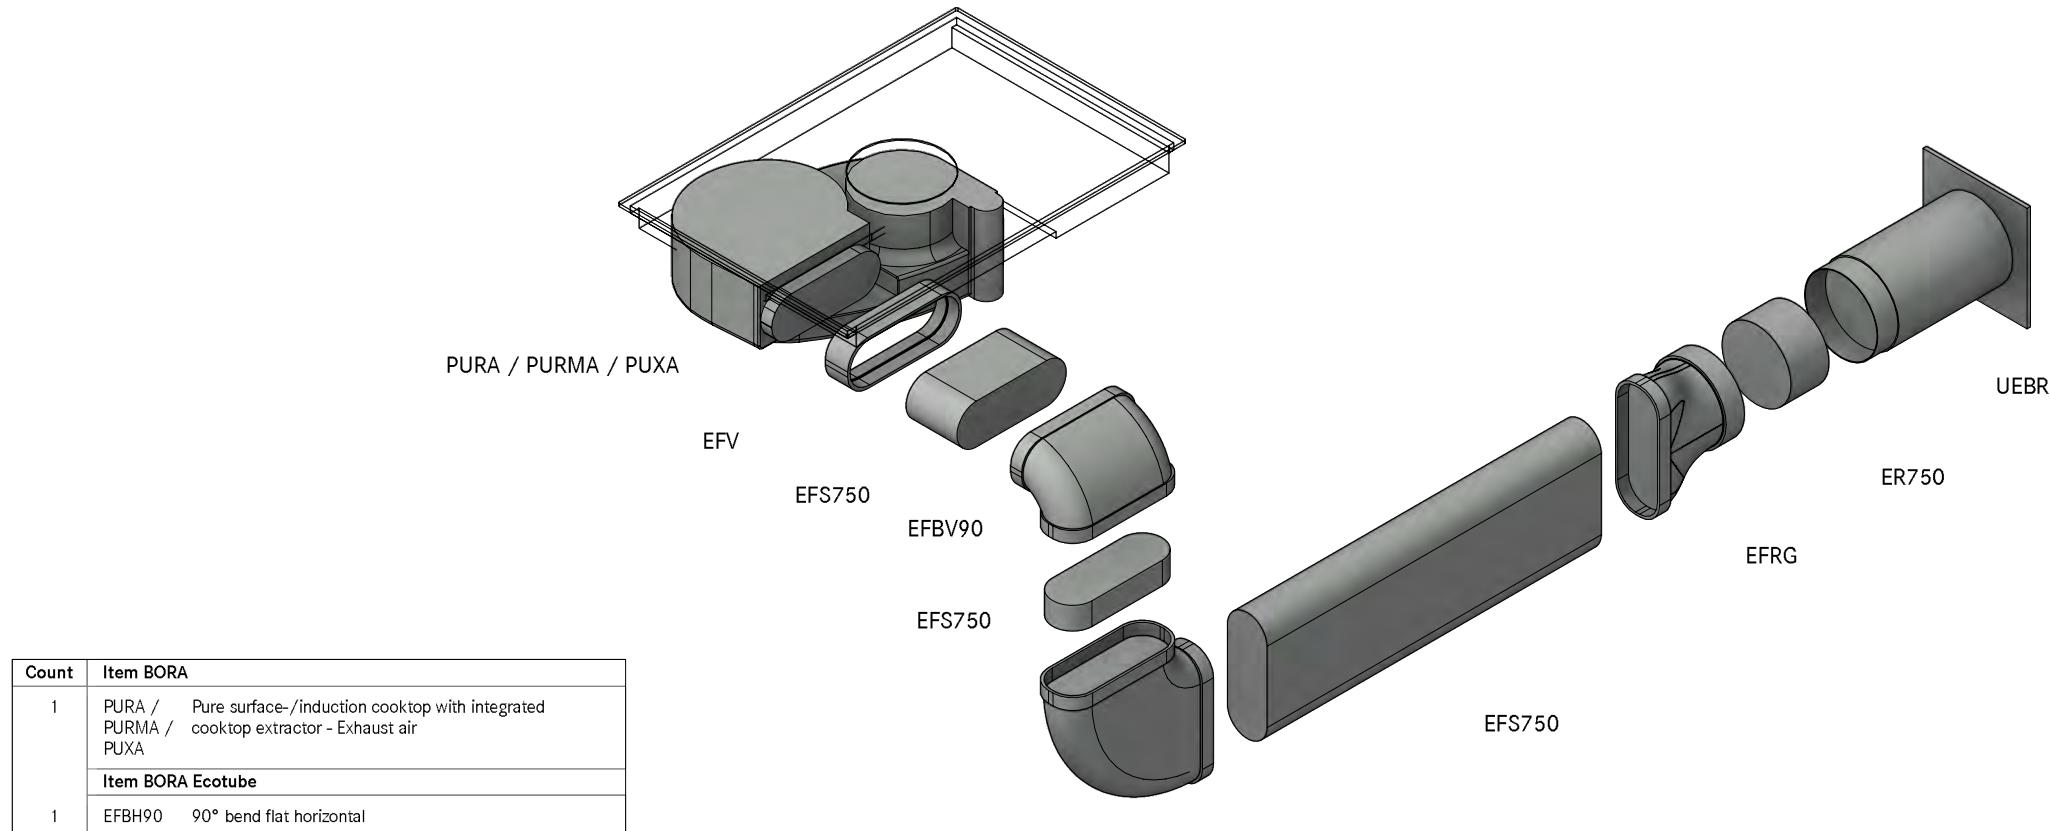


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
1	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
1	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
2	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

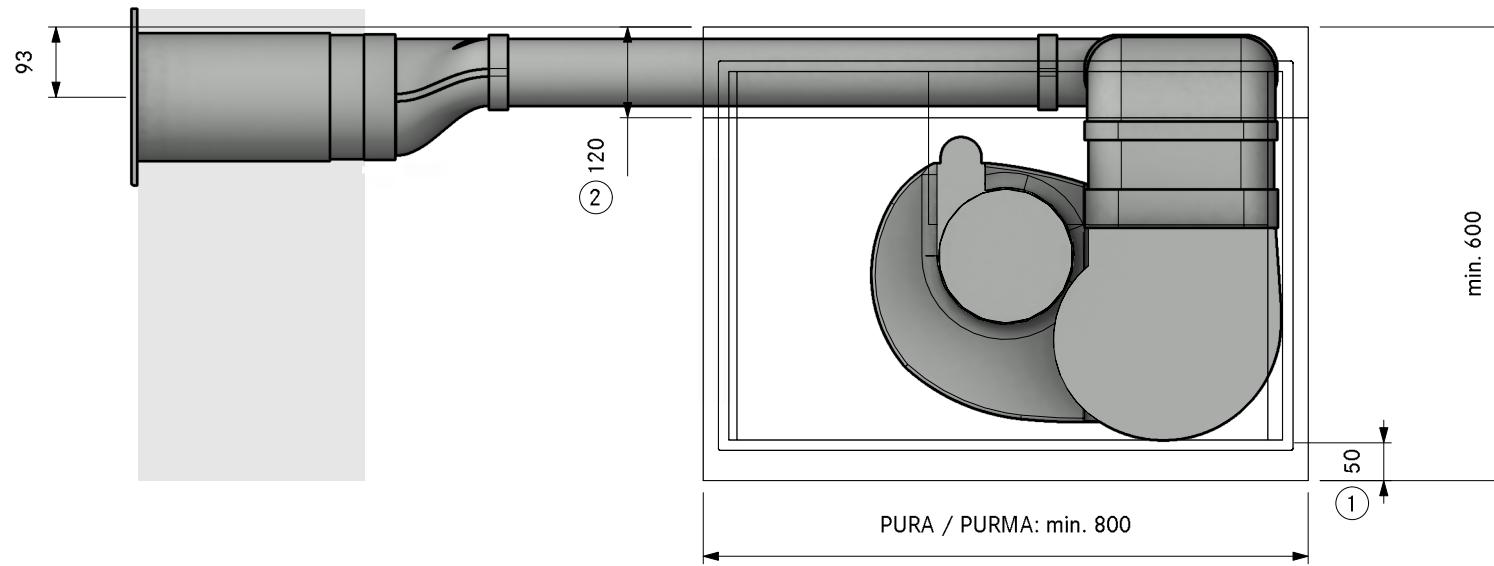

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA10424  
(X/M)Pure Worktop left UEBR upright

LAYOUT SA

Version, 1.0

**BORA**

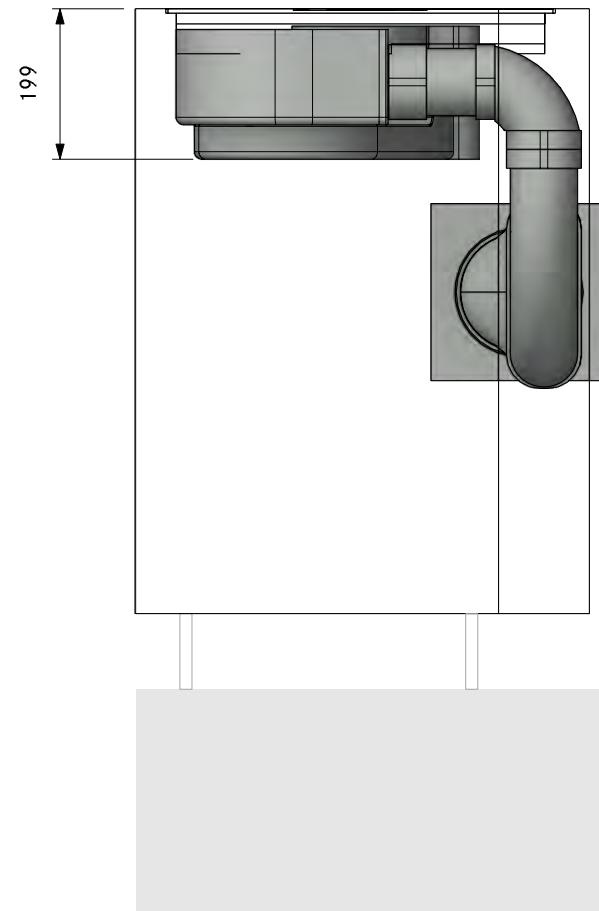

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA10424  
(X/M)Pure Worktop left UEBR upright

LAYOUT

FA

Version, 1.0

**BORA**

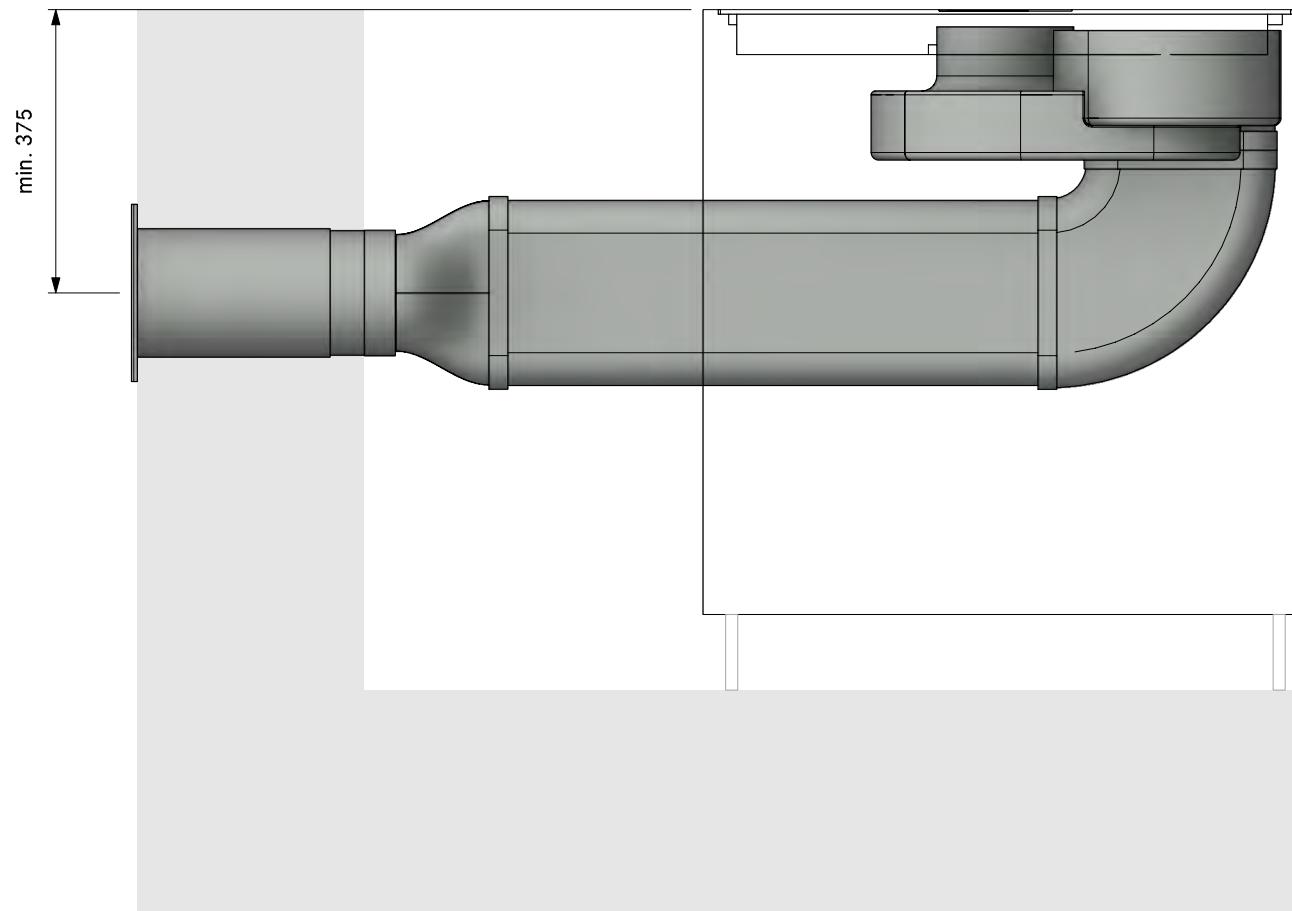


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

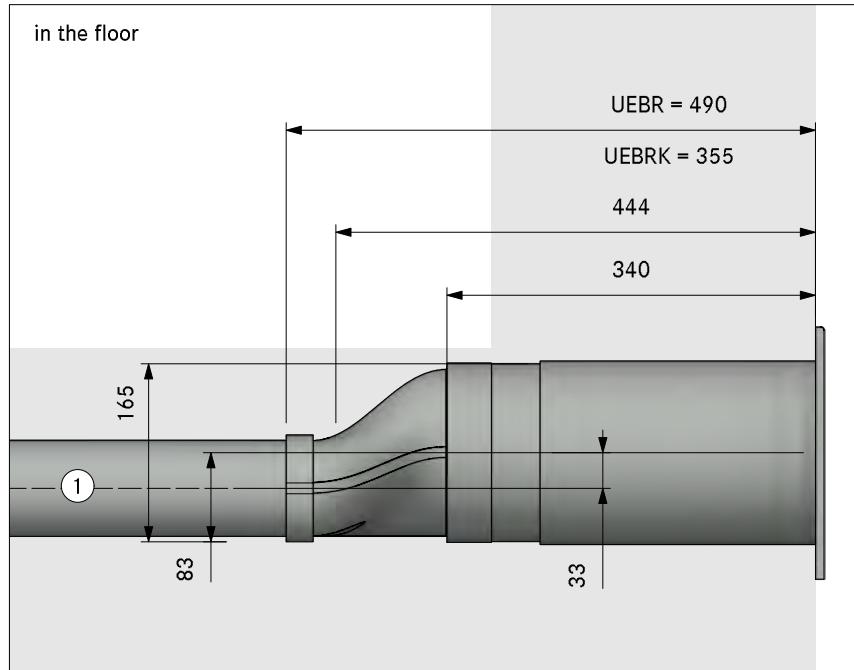

in the plinth area

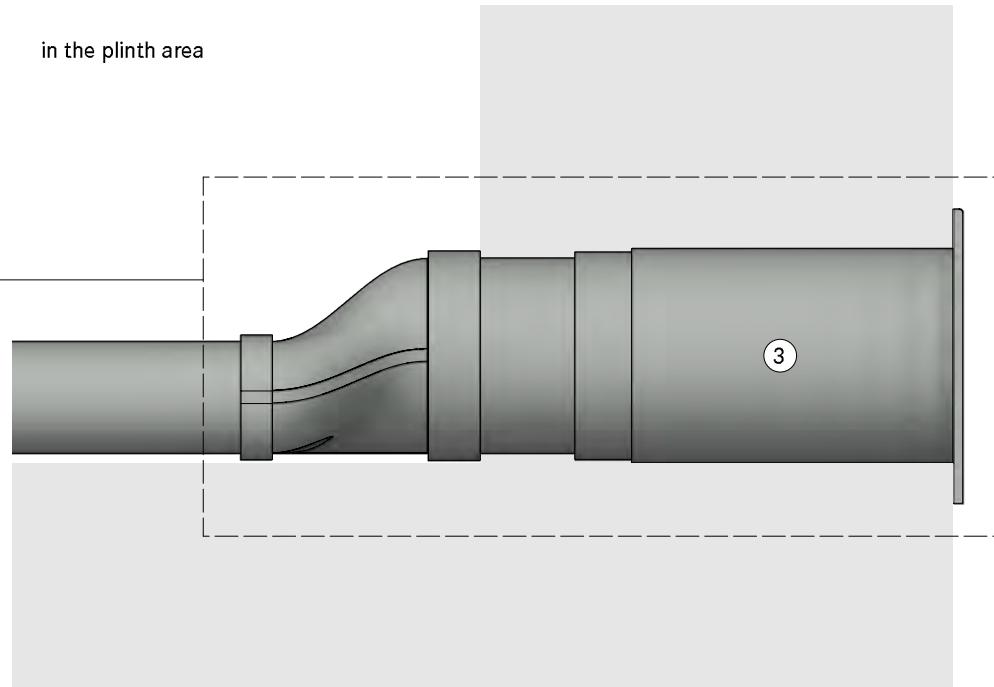

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

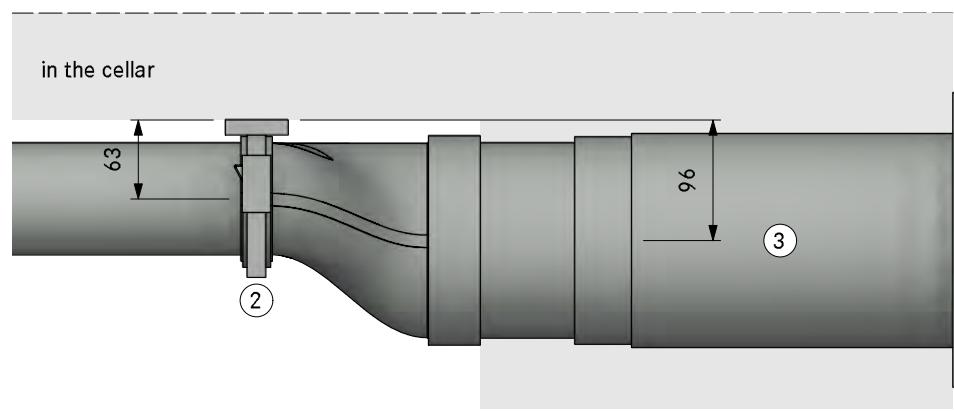

# Plinth

direction of the ducting to the right . . . . .	48
direction of the ducting to the left . . . . .	72

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA20210  
(X/M)Pure Plinth right UEBF


LAYOUT 3D

Version, 1.0

**BORA**


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

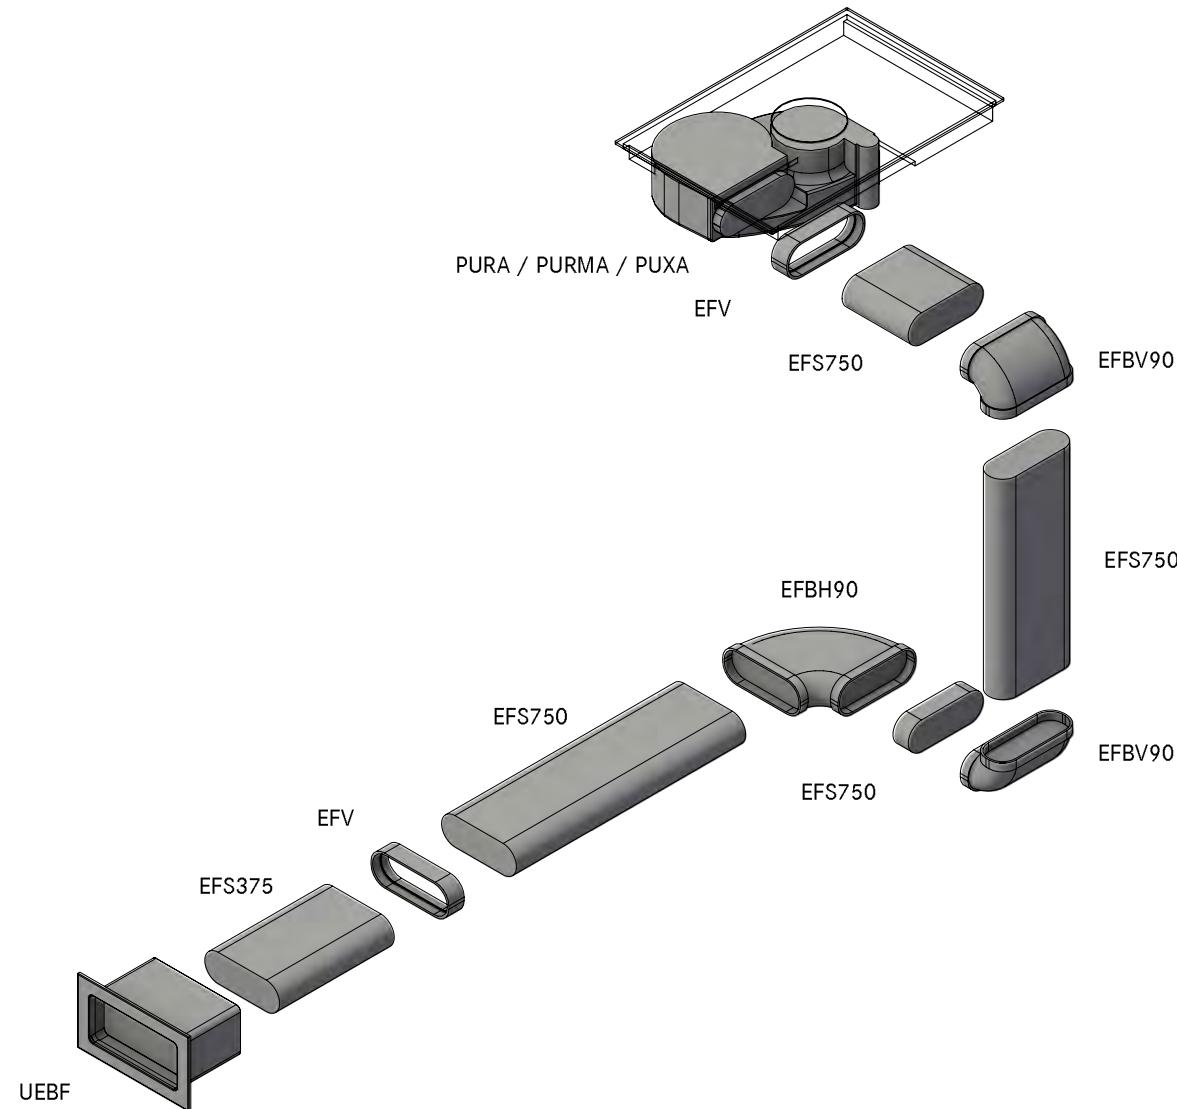

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

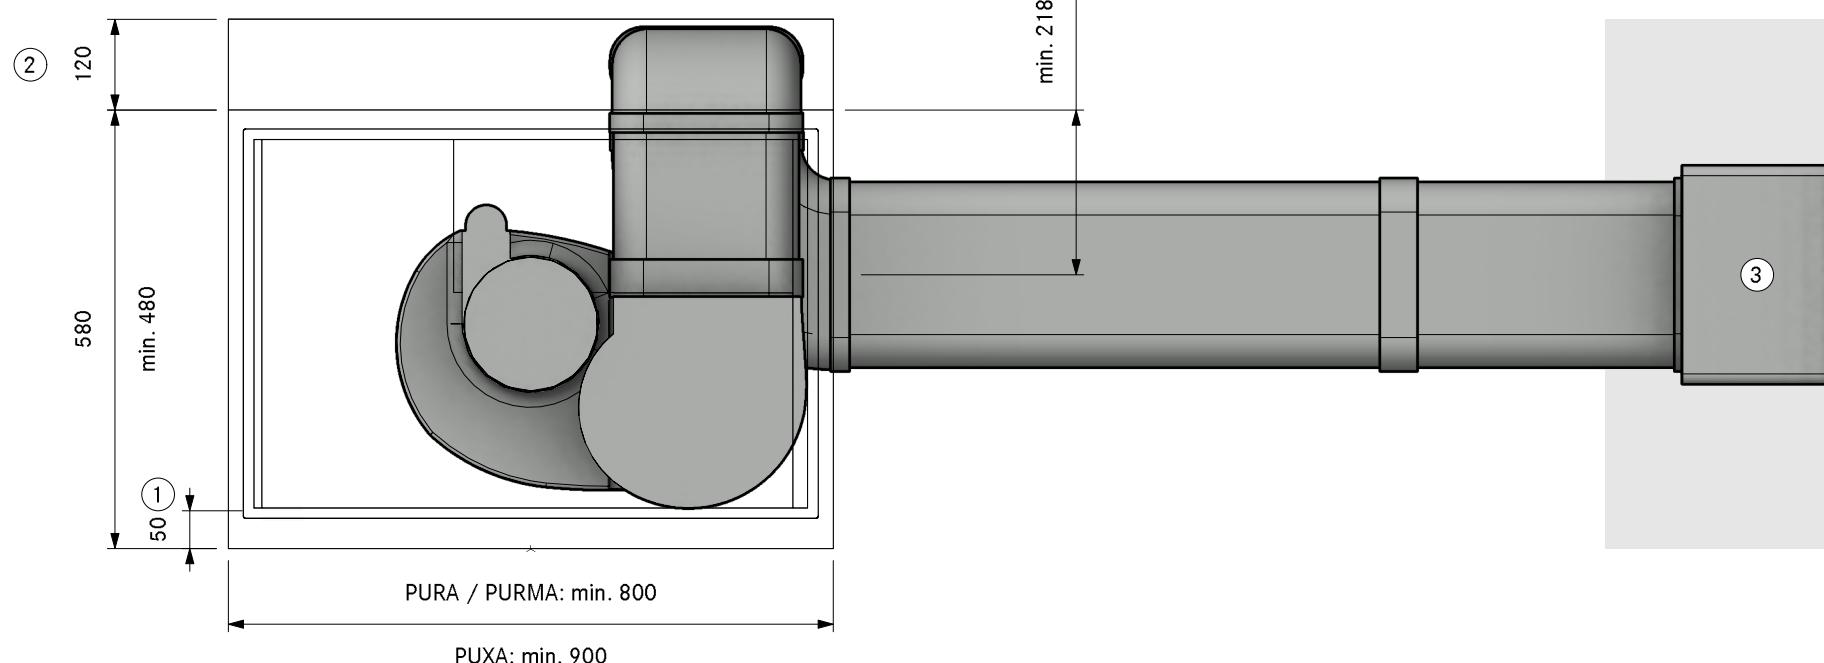

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA20210  
(X/M)Pure Plinth right UEBF

SA

Version, 1.0

**BORA**

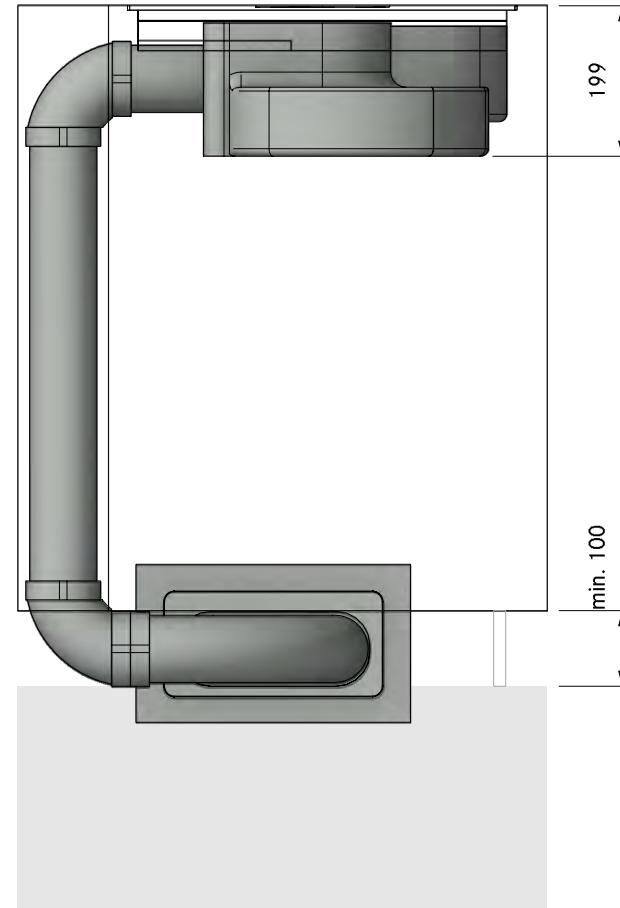

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA20210  
(X/M)Pure Plinth right UEBF

LAYOUT FA


Version, 1.0

**BORA**

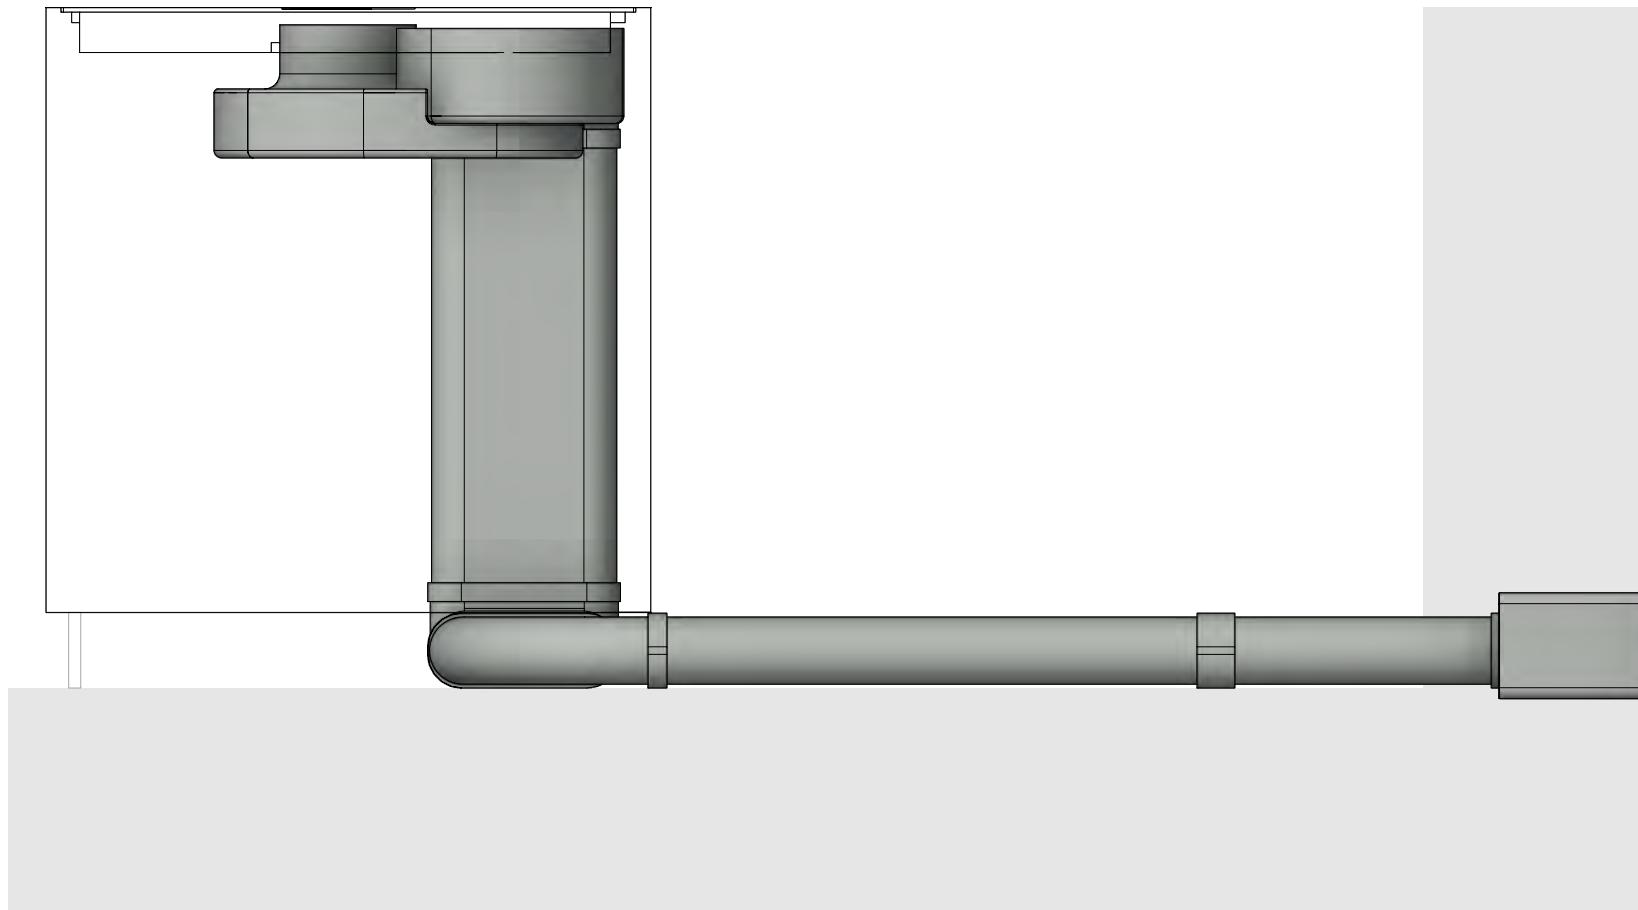

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

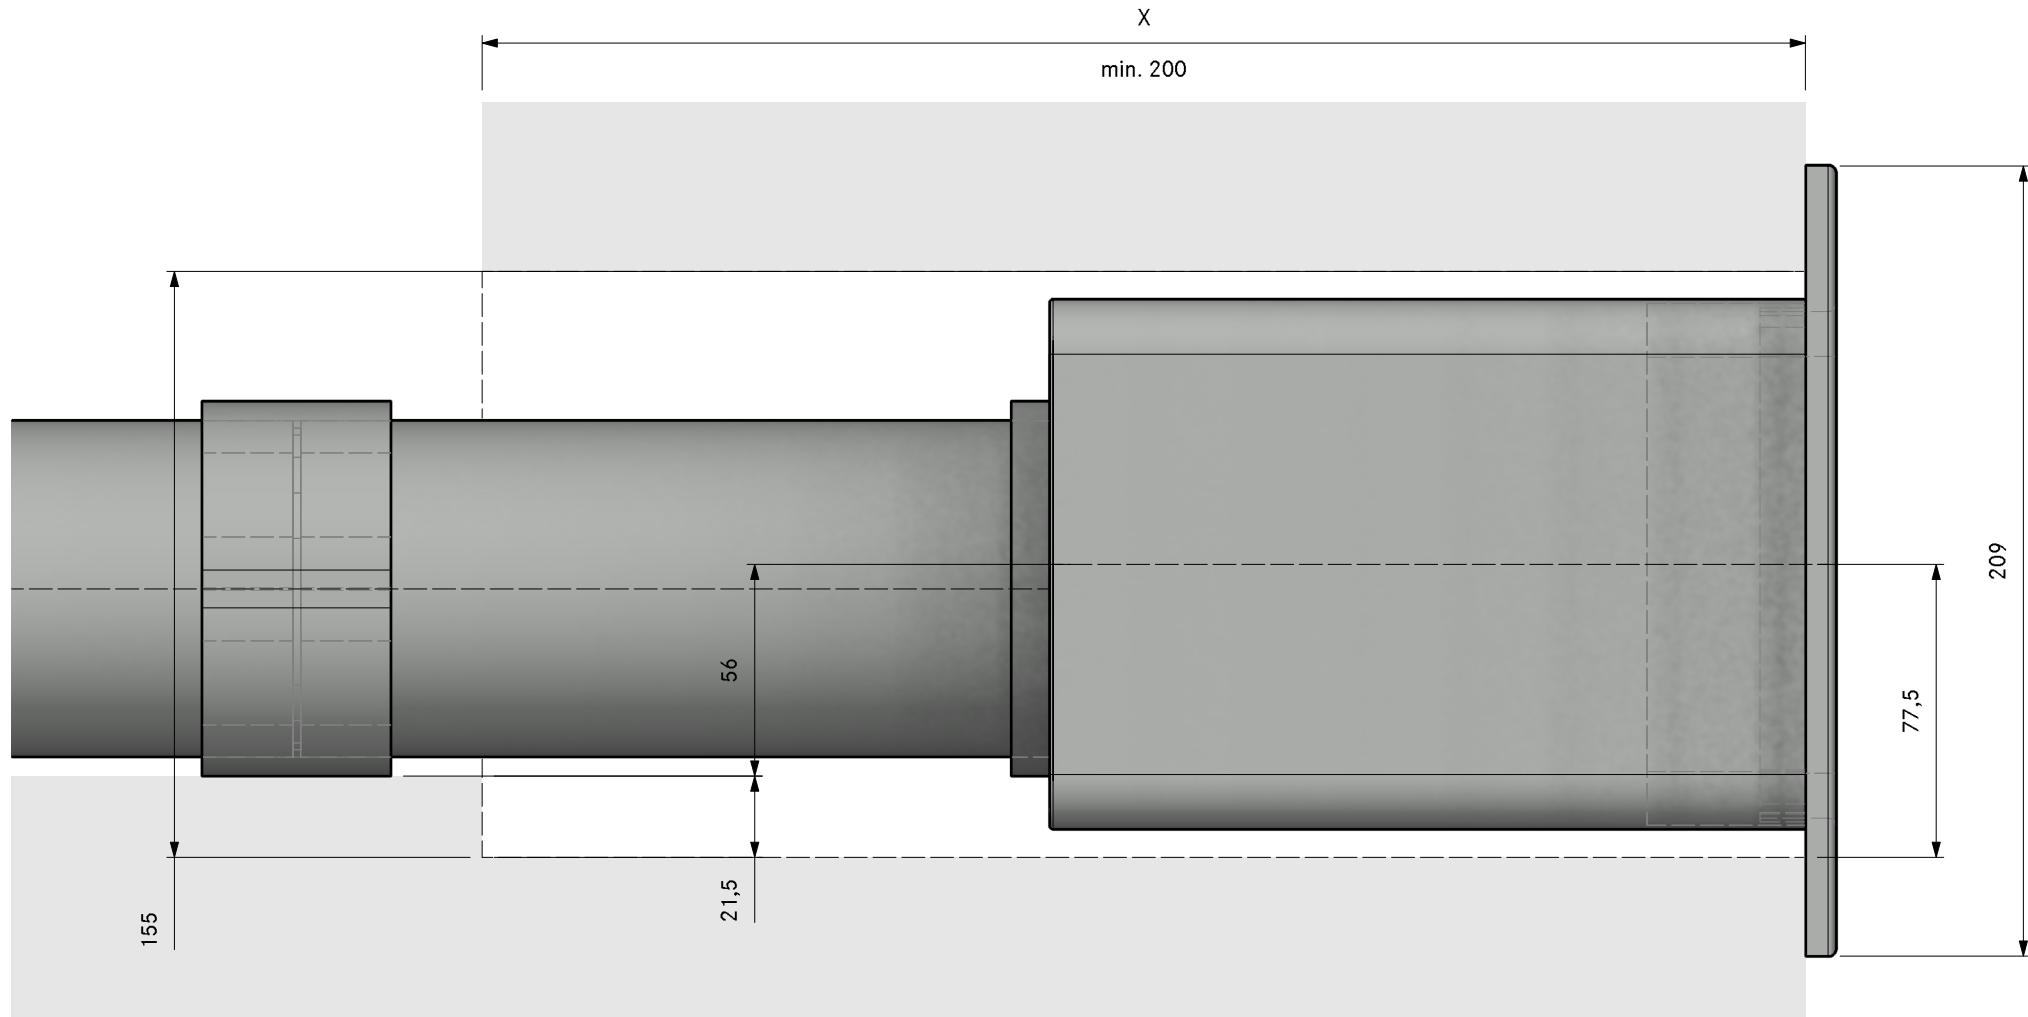




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
1	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

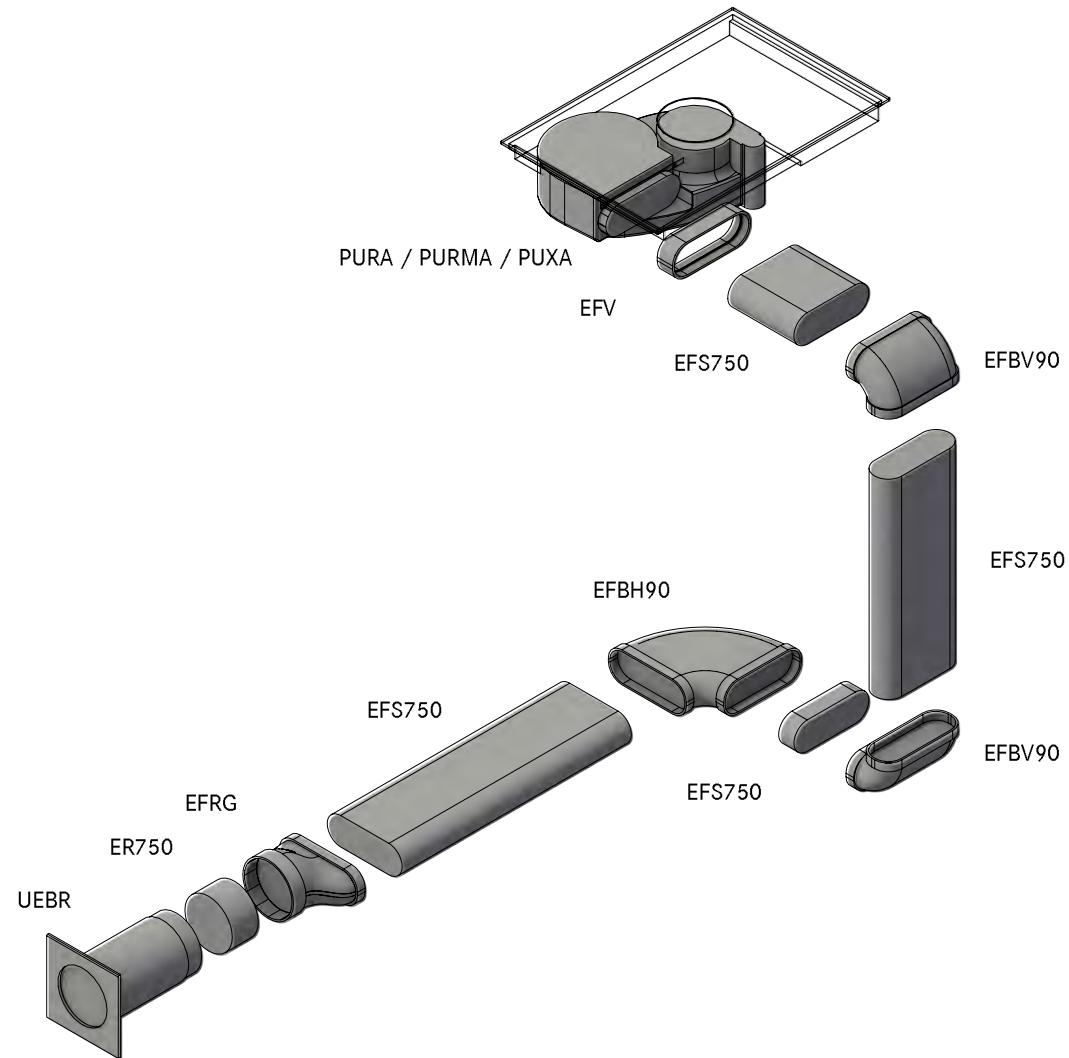

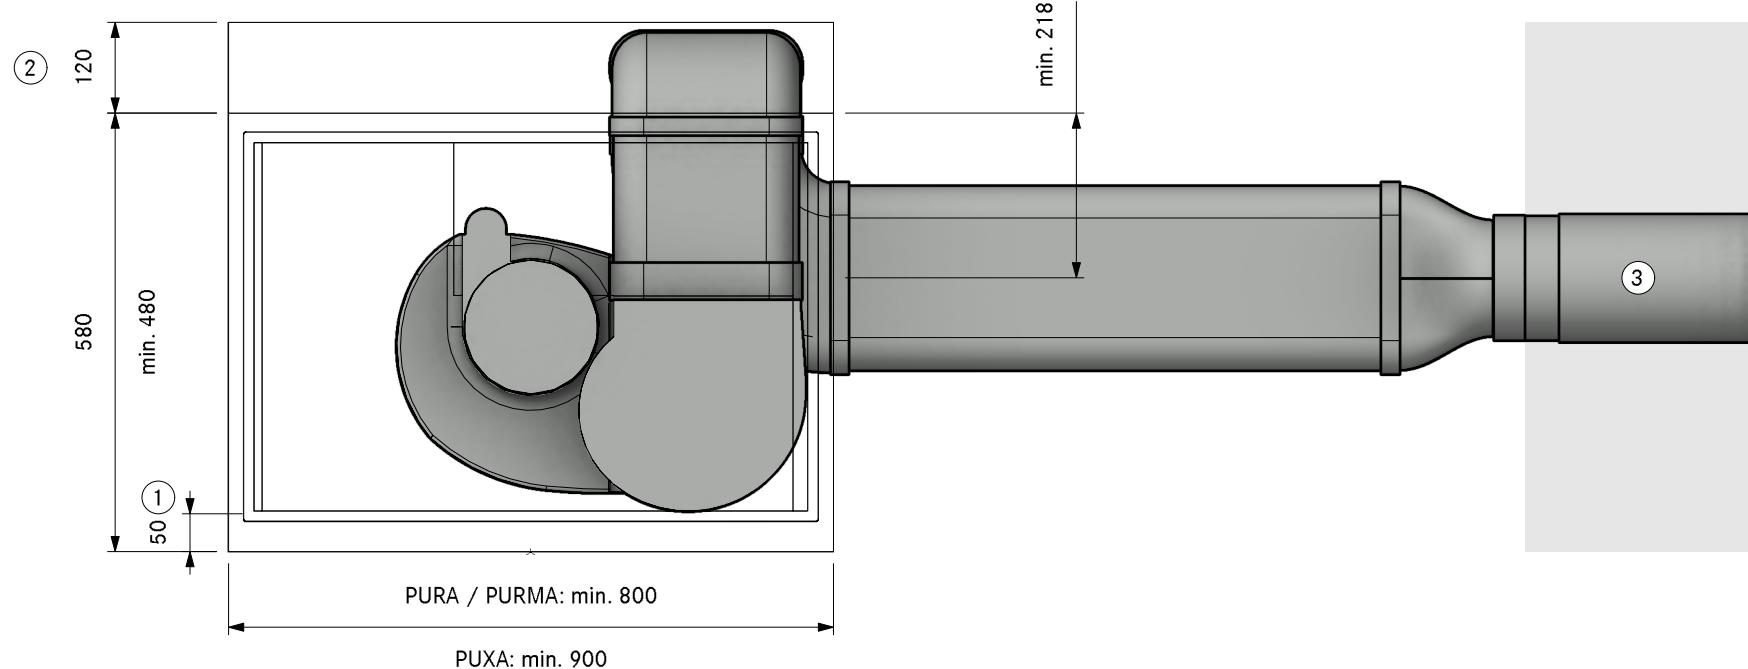

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required


3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA20220  
(X/M)Pure plinth right UEBR  
SA

Version, 1.0

**BORA**

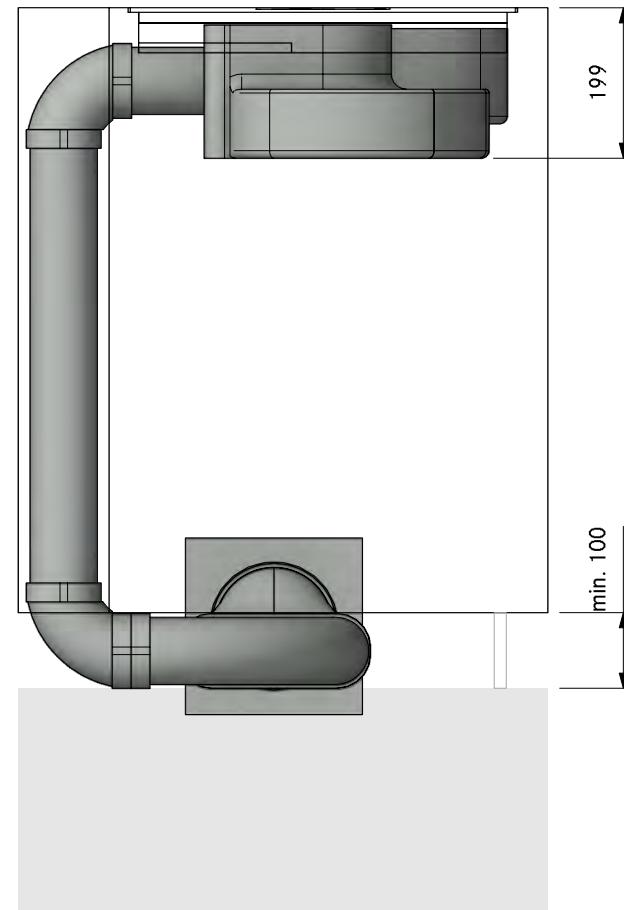

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA20220  
(X/M)Pure plinth right UEBR

FA

Version, 1.0

**BORA**

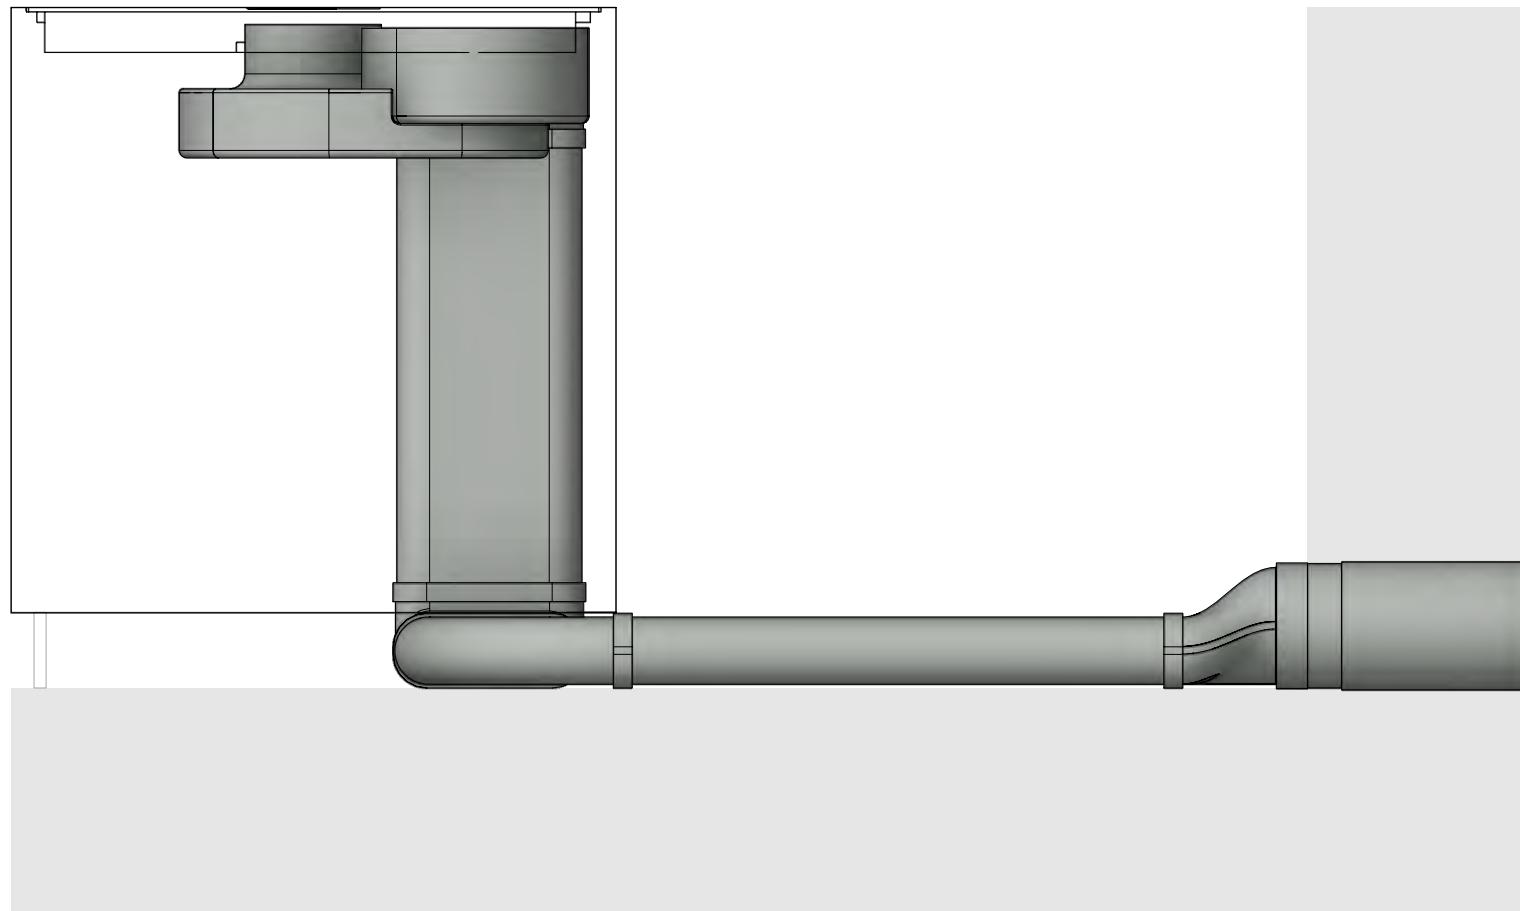


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

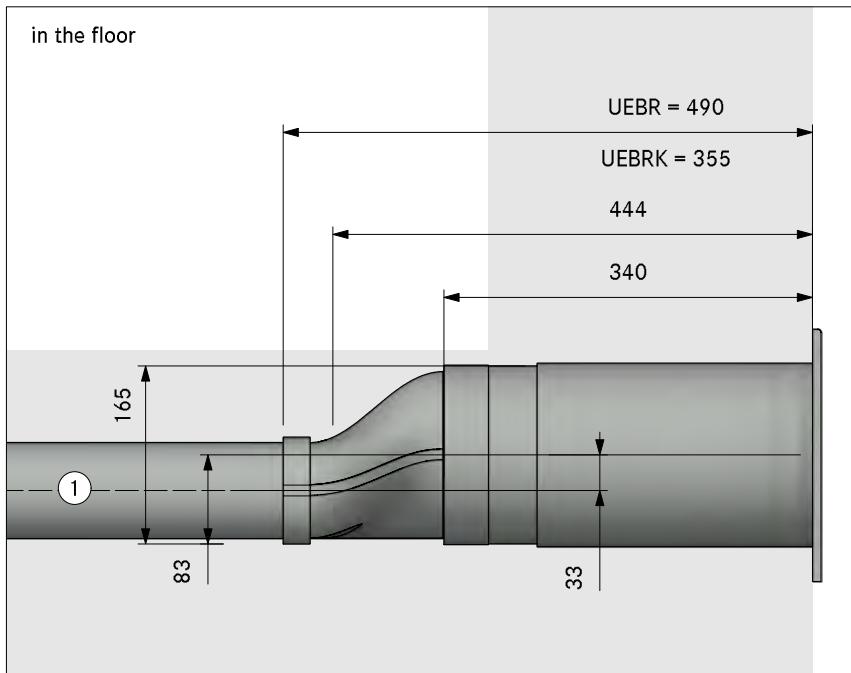

in the plinth area

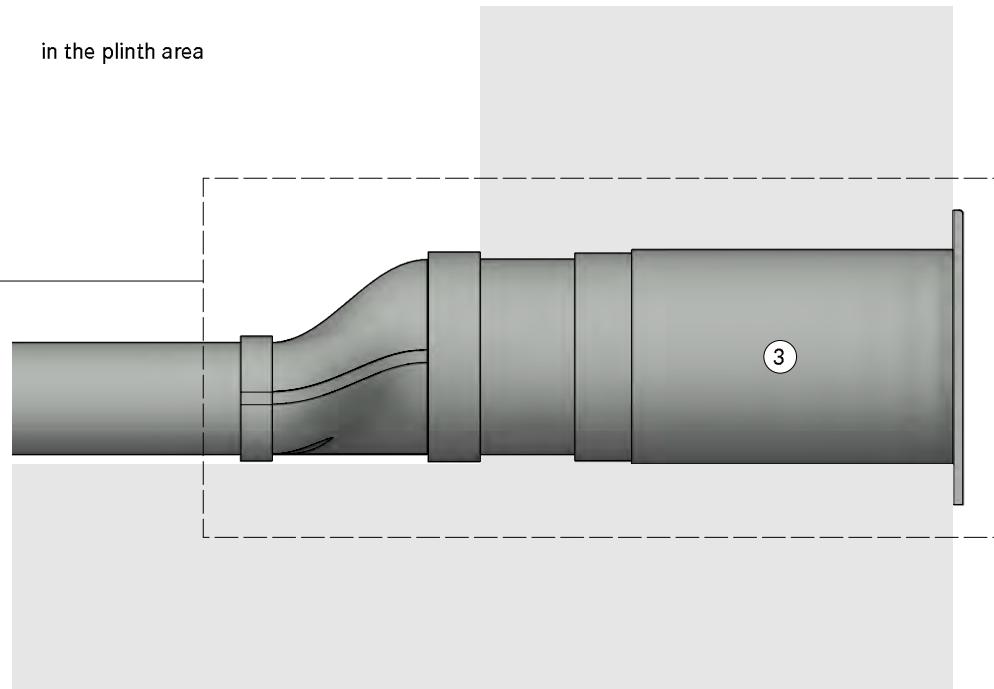

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

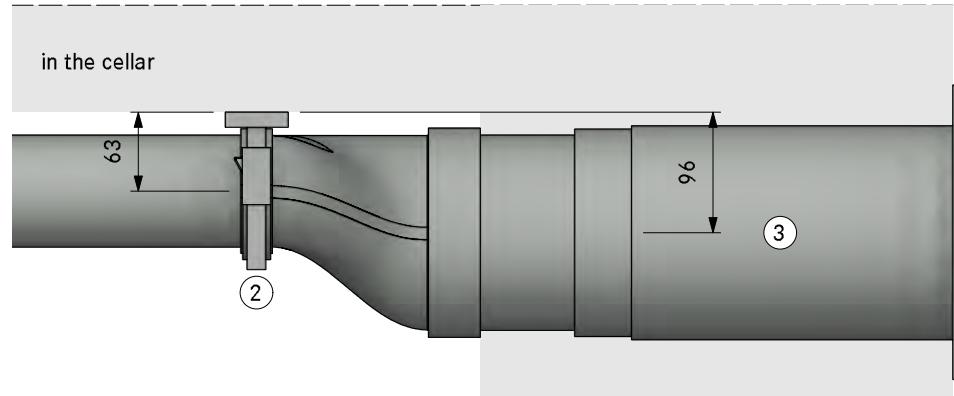



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA20230  
(X/M)Pure Plinth right swan neck UEBF


LAYOUT 3D

Version, 1.0

**BORA**


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
4	EFBV90 90° bend flat vertical
1	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

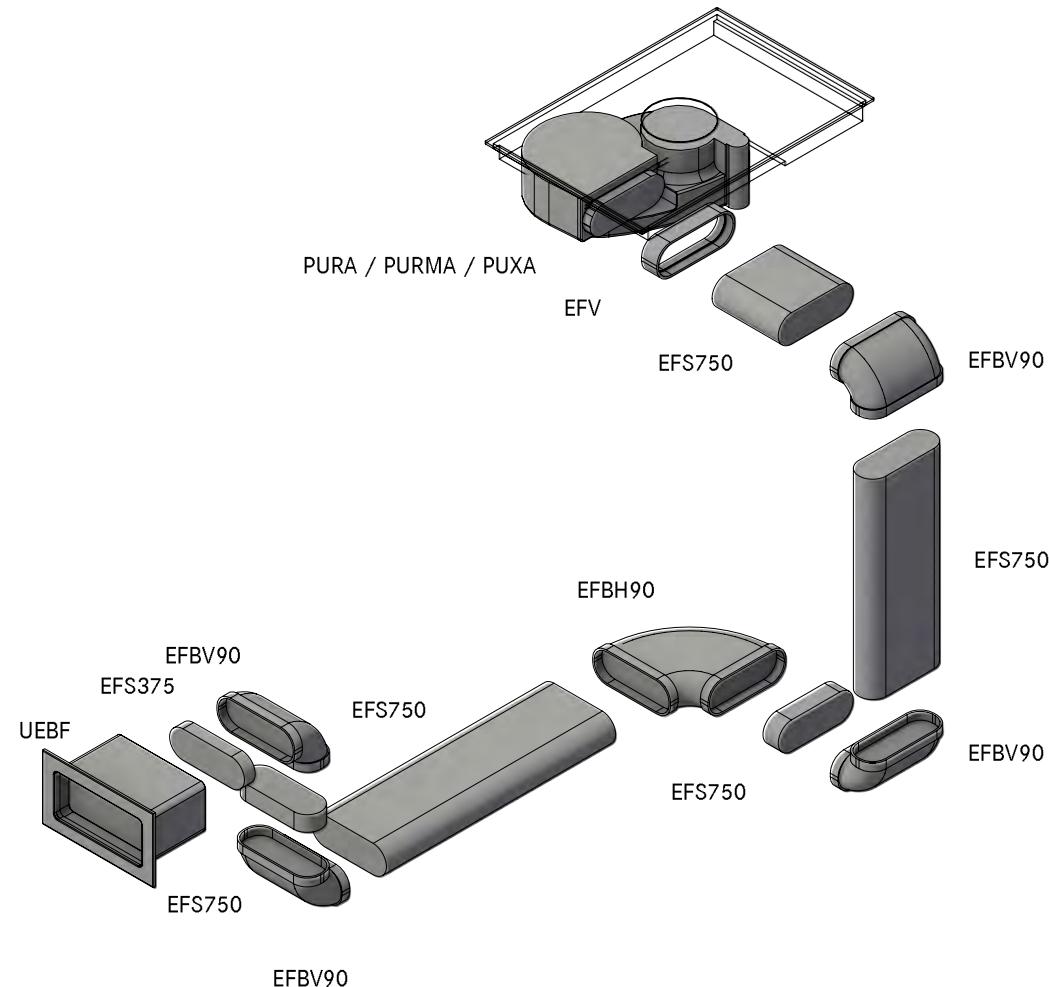

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

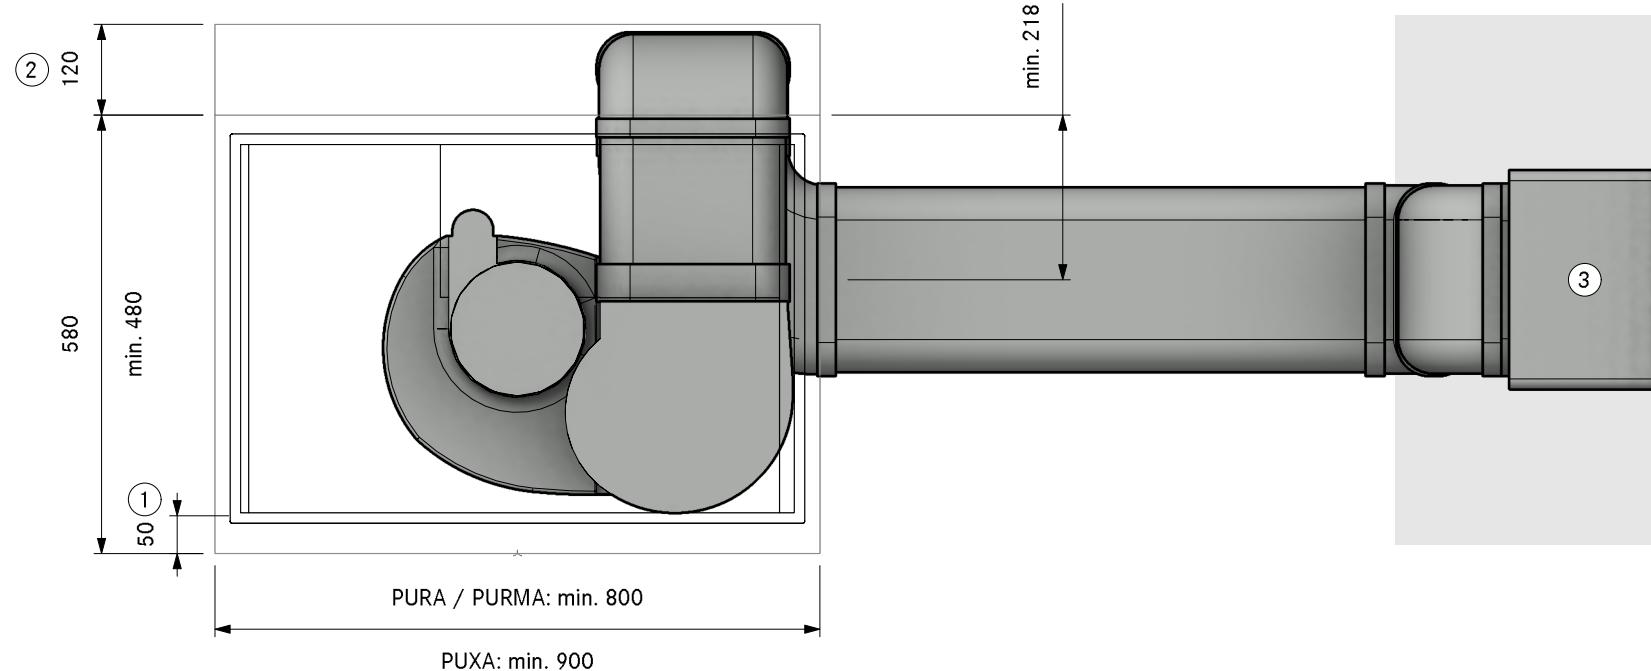

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required


3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA20230  
(X/M)Pure Plinth right swan neck UEBF

Version, 1.0

**BORA**

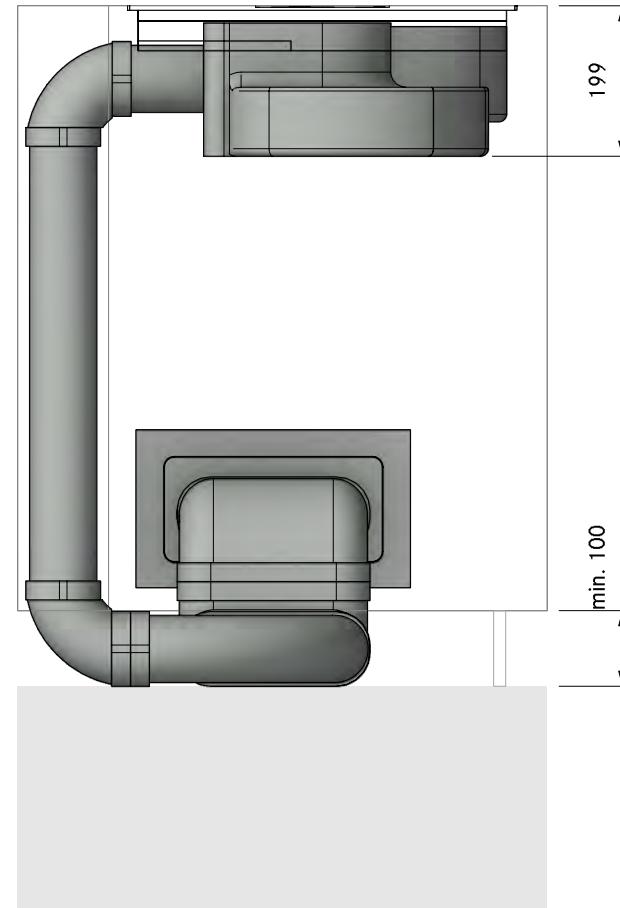

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA20230  
(X/M)Pure Plinth right swan neck UEBF


Version, 1.0

**BORA**

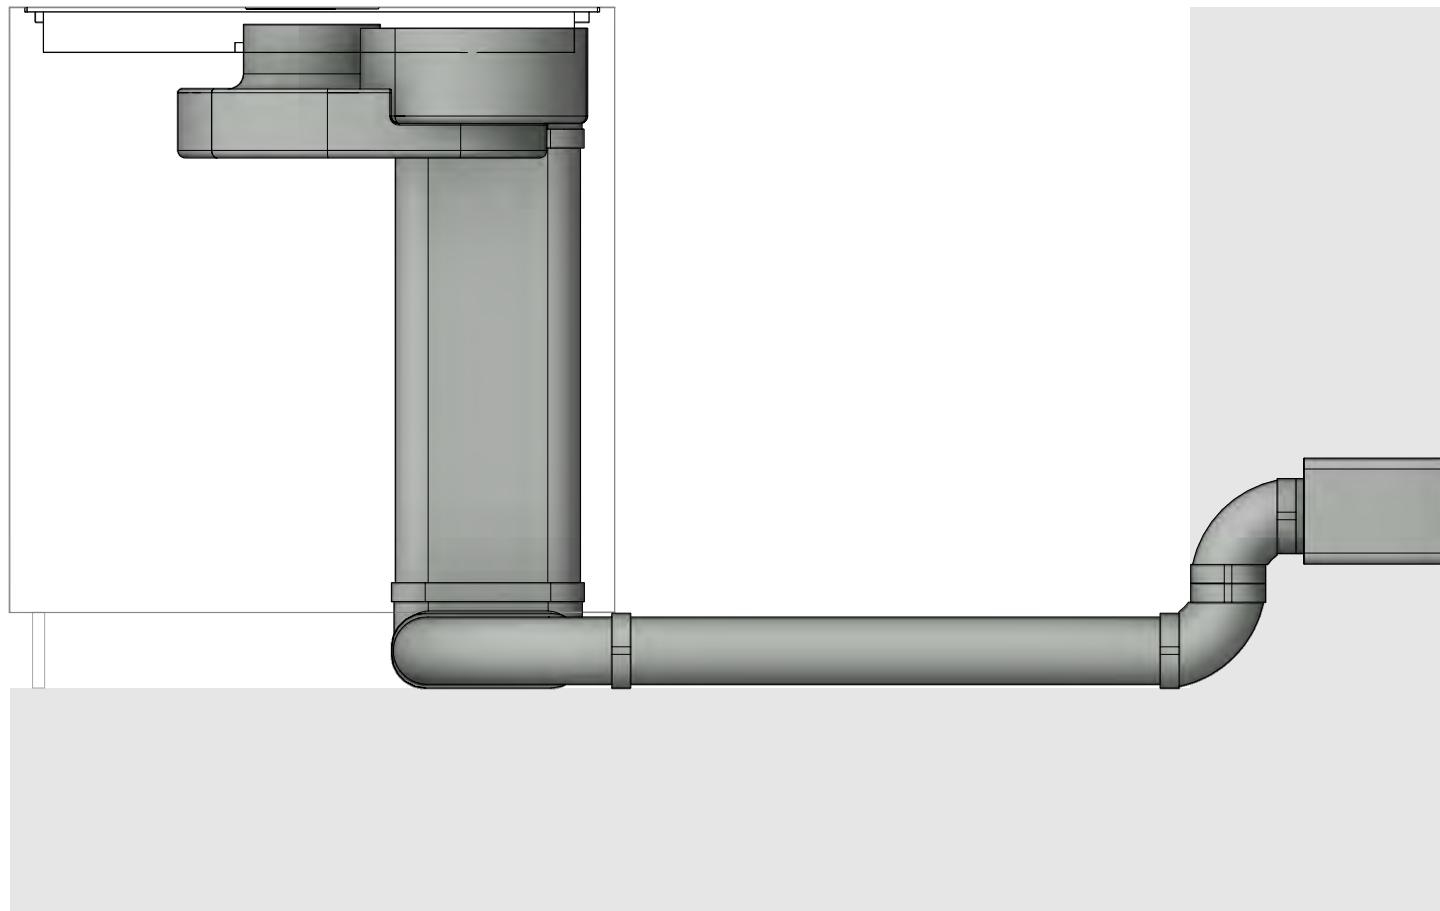

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

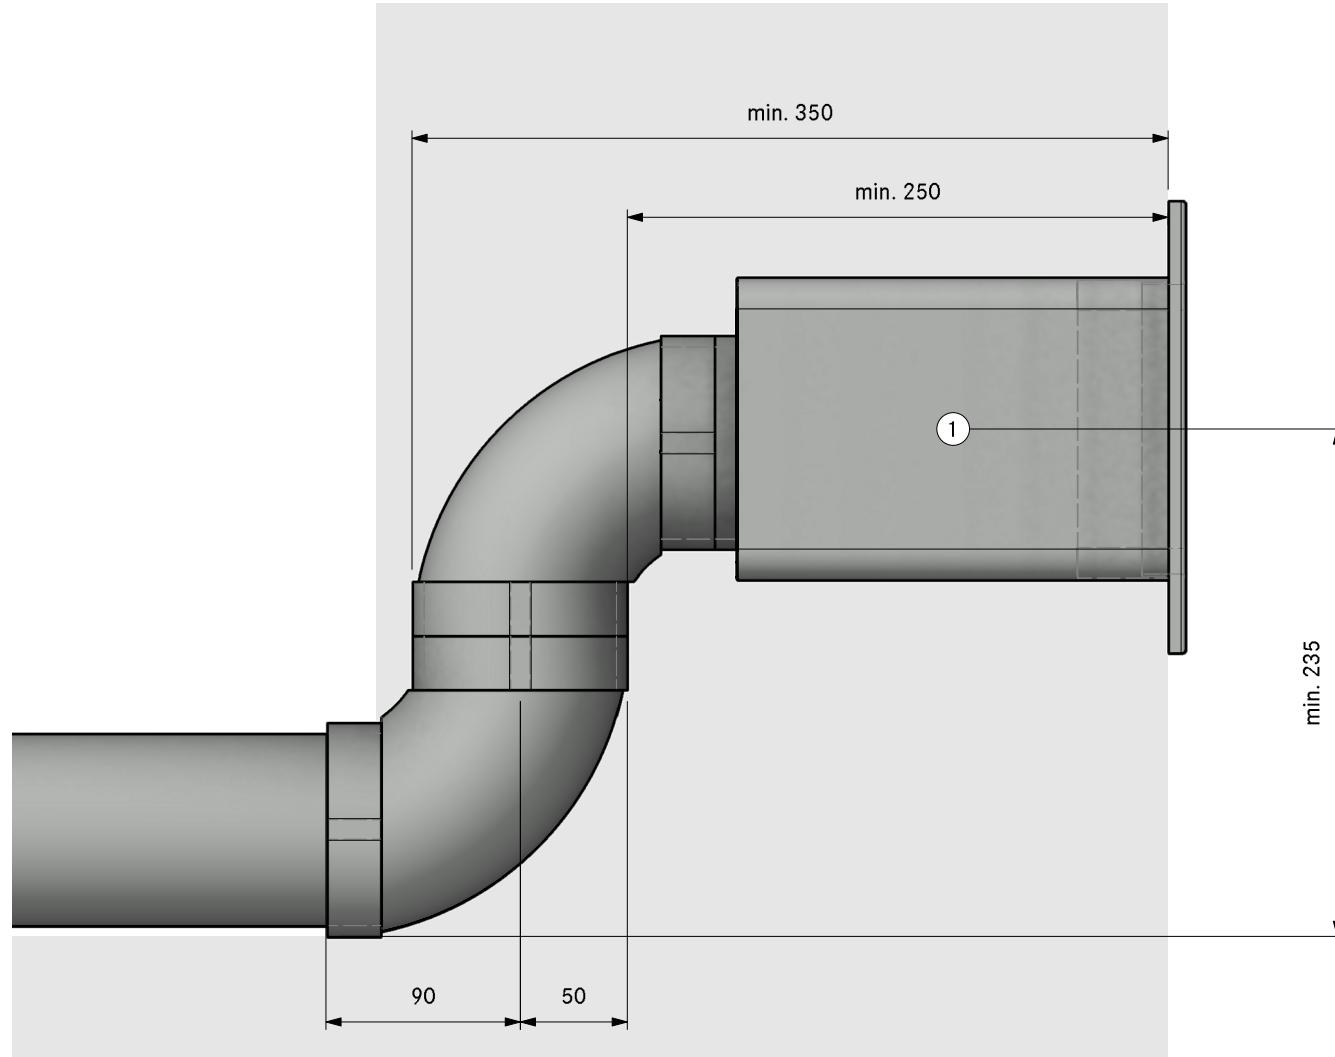

1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA20240  
(X/M)Pure plinth right swan neck UEBR


LAYOUT 3D


Version, 1.0

**BORA**

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
1	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

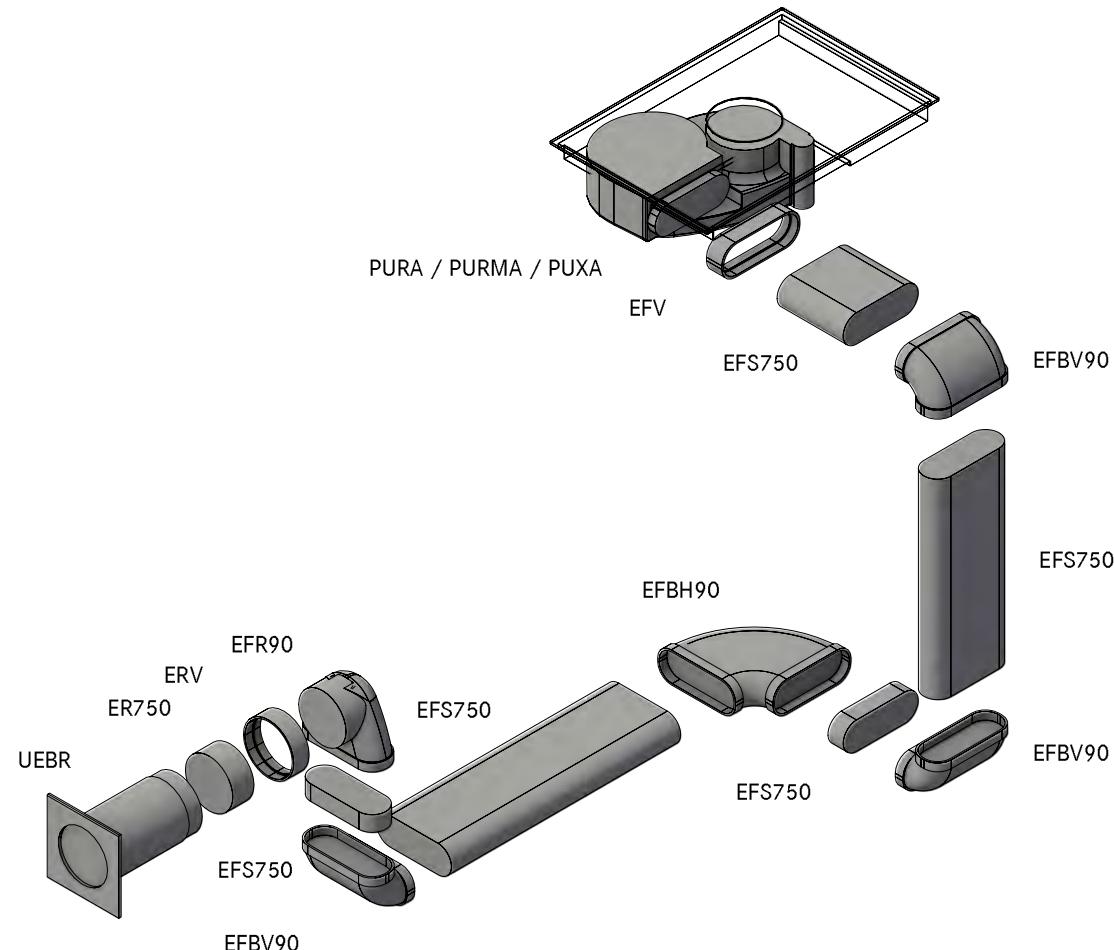

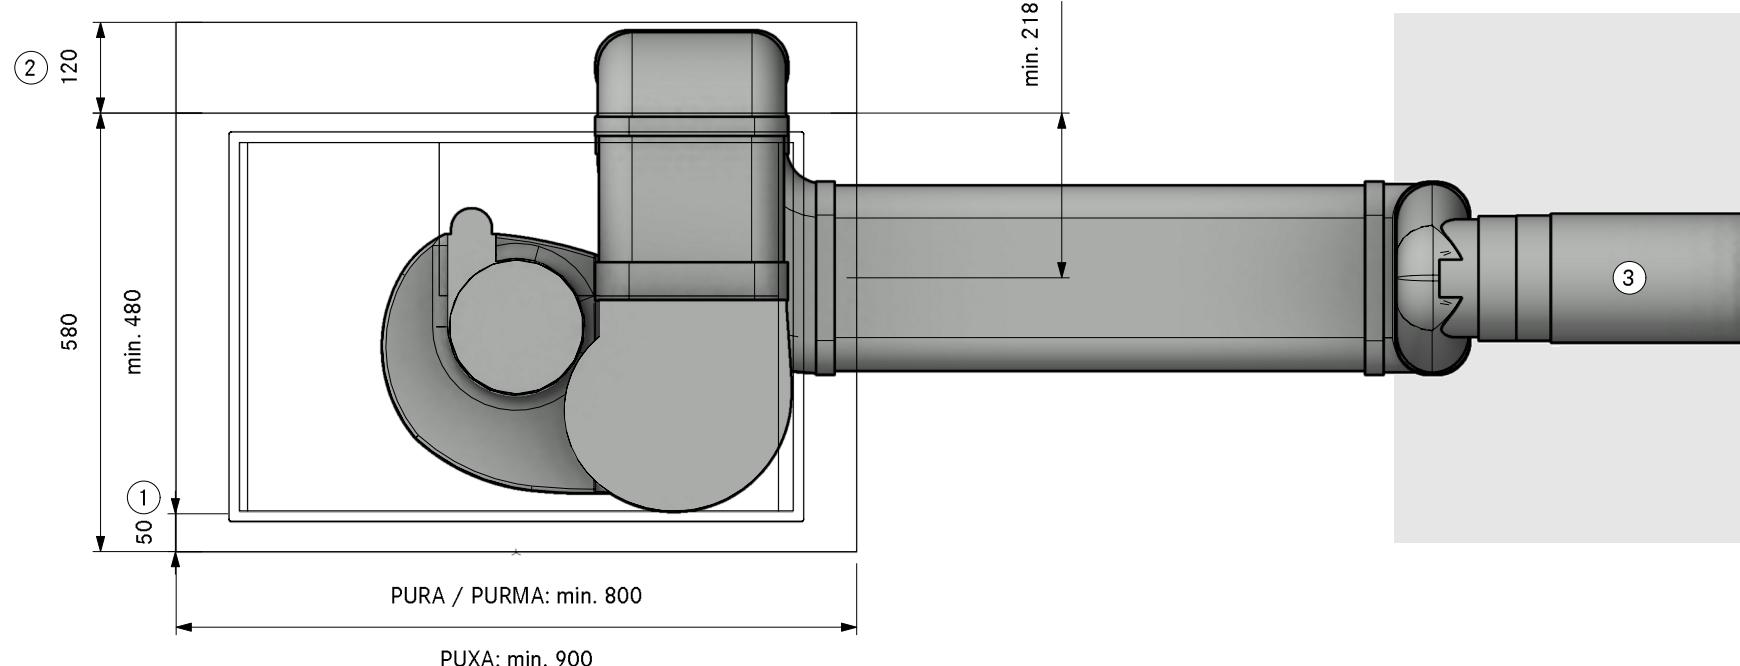

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required


3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA20240  
(X/M)Pure plinth right swan neck UEBR

Version, 1.0

**BORA**

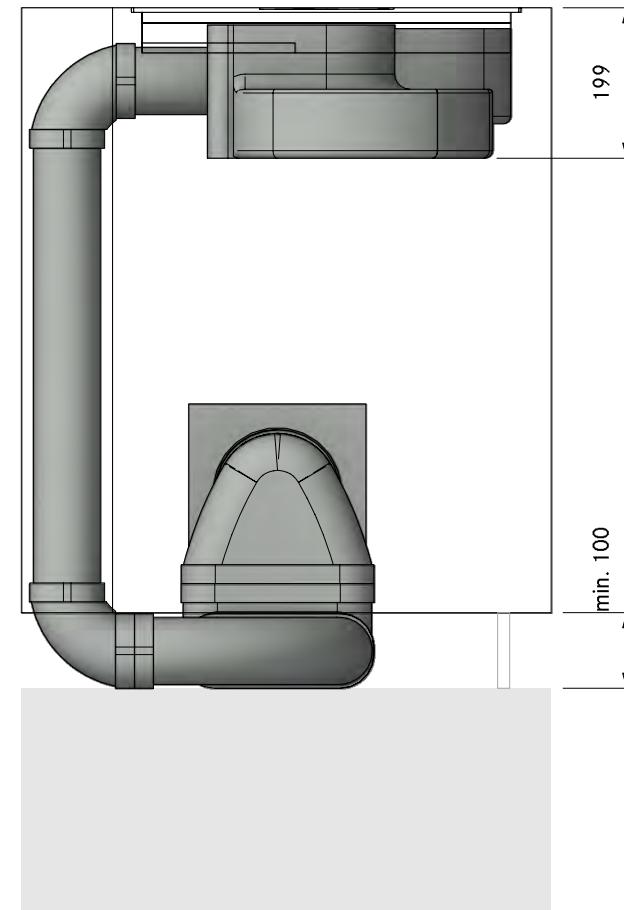

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA20240  
(X/M)Pure plinth right swan neck UEBR

LAYOUT FA


Version, 1.0

**BORA**

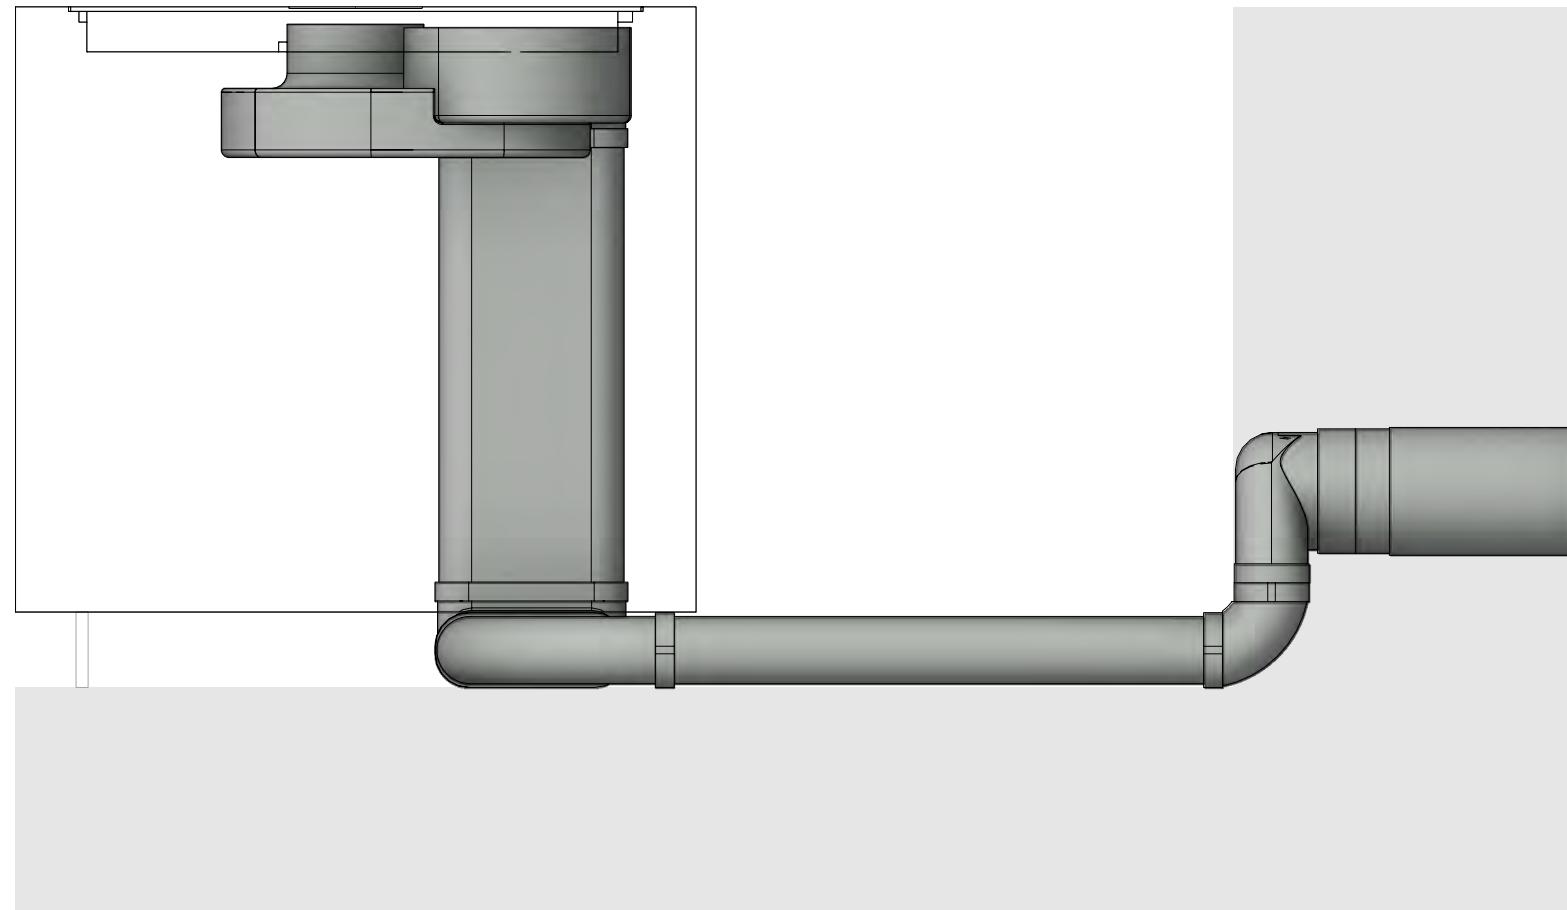

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

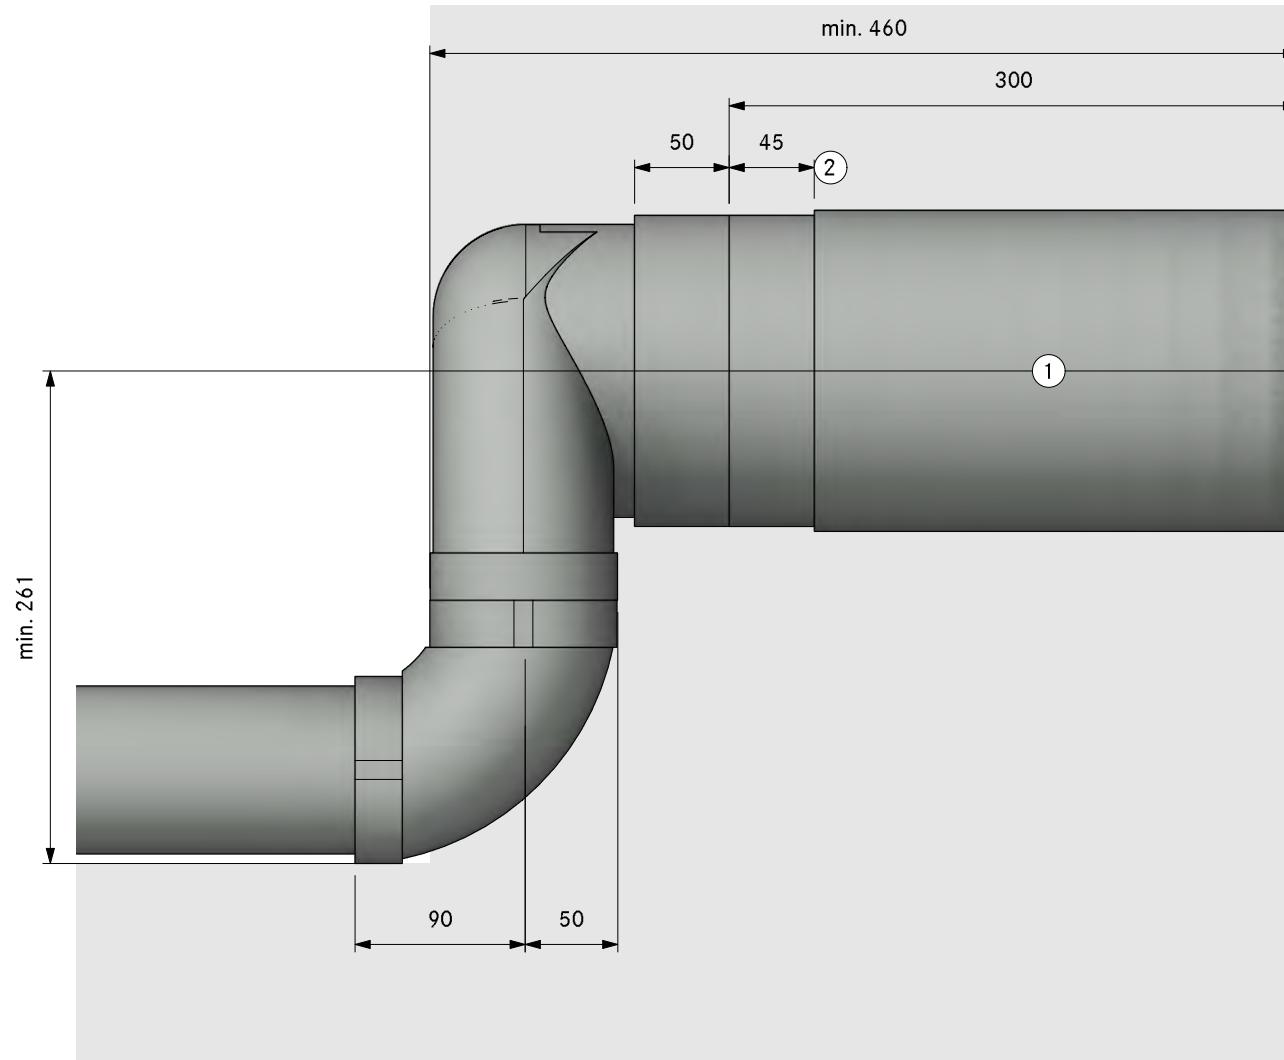



1. Hole size min. Ø 180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

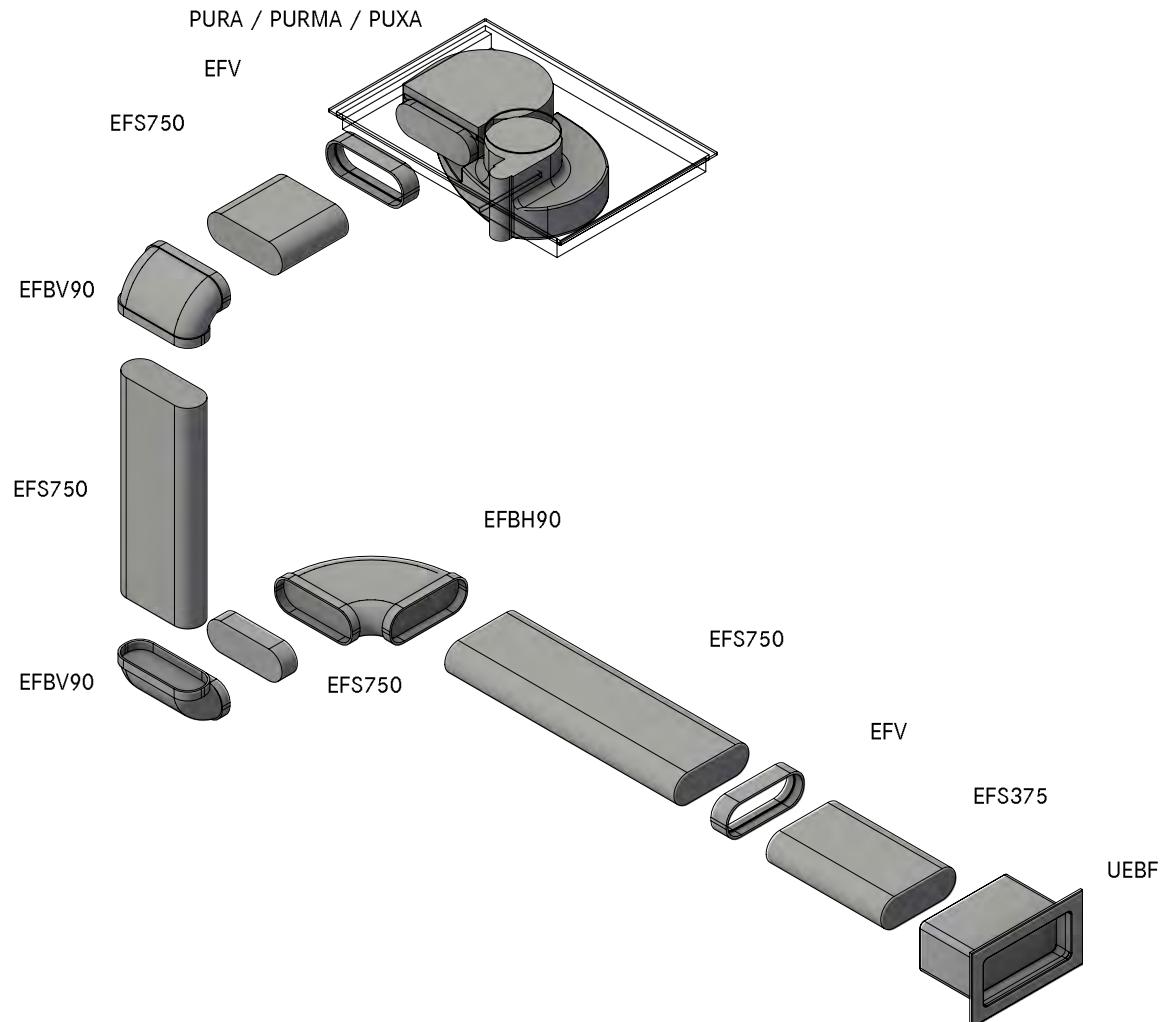

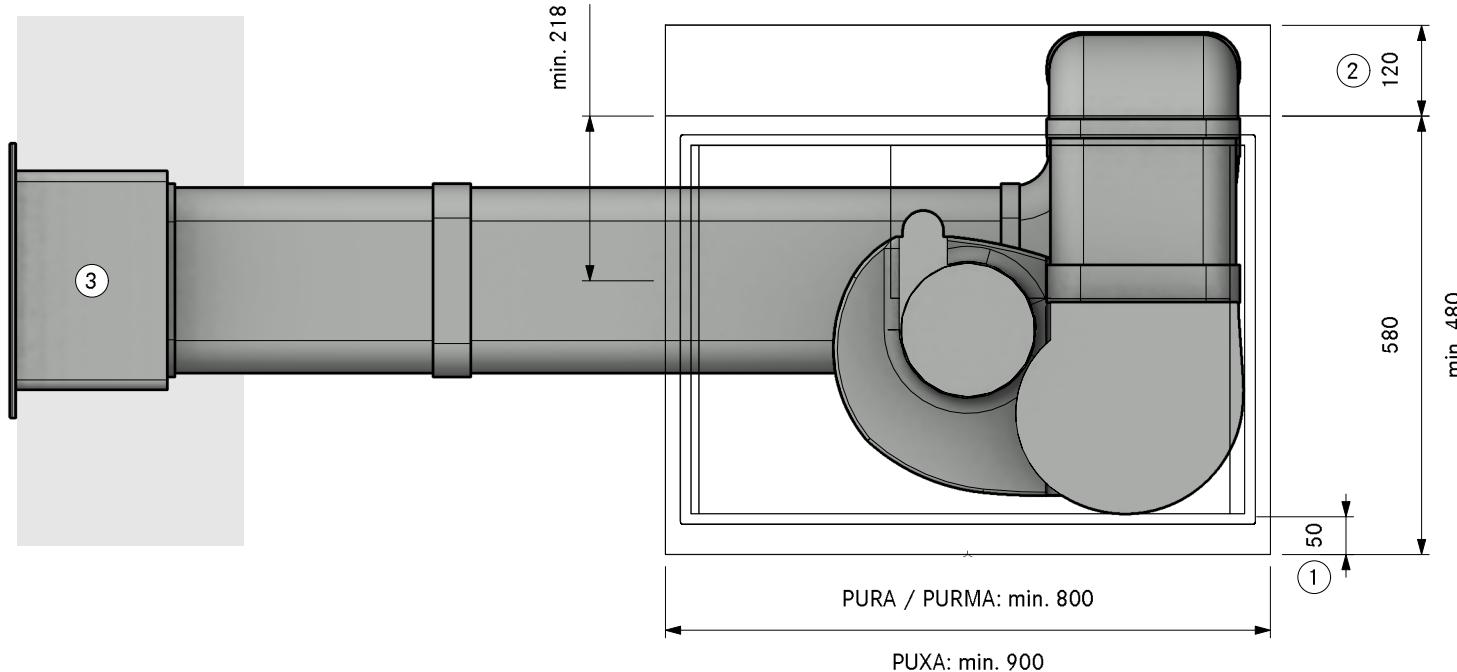

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA20410  
(X/M)Pure Plinth left UEBF

SA

Version, 1.0

**BORA**

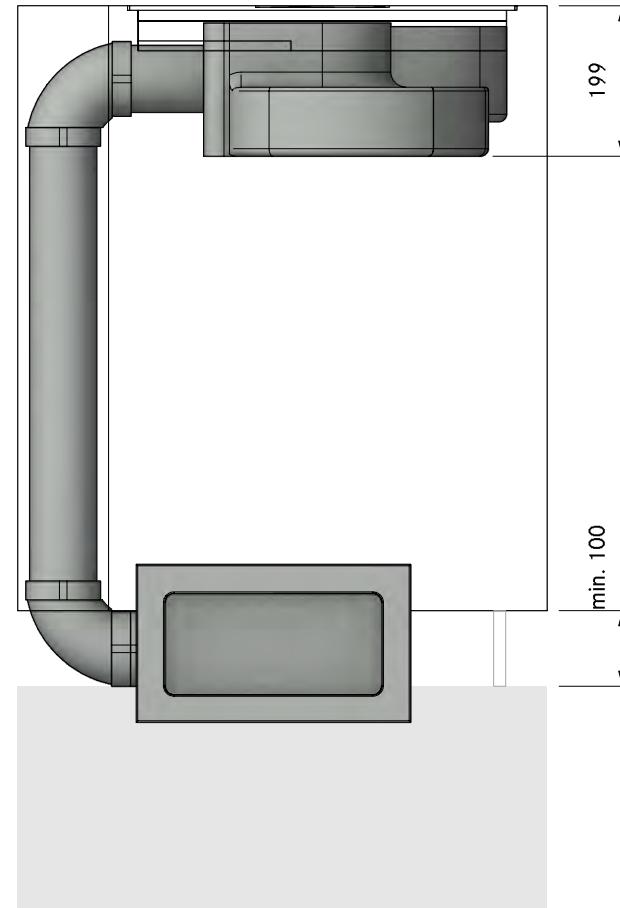

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA20410  
(X/M)Pure Plinth left UEBF

LAYOUT FA


Version, 1.0

**BORA**

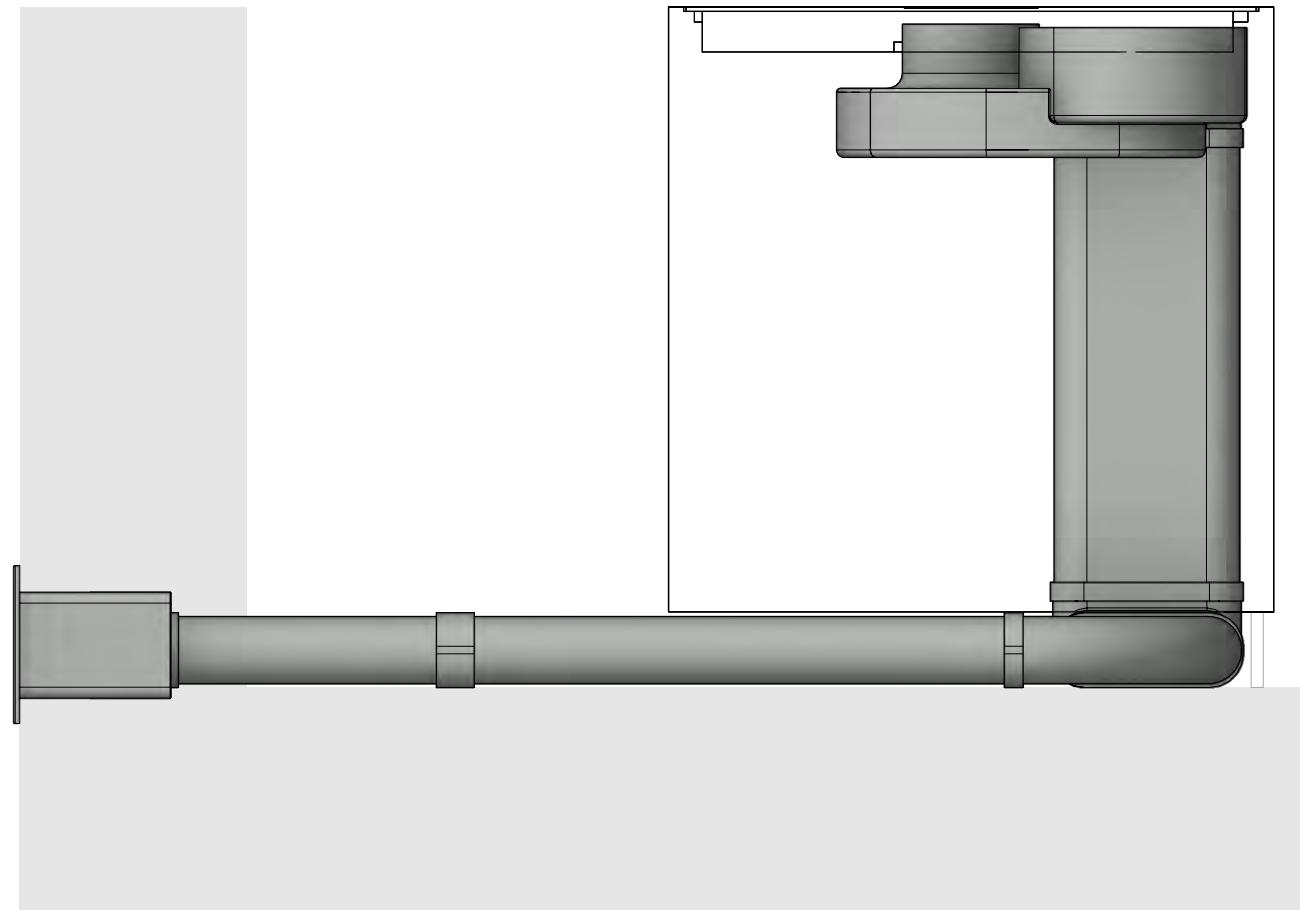

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

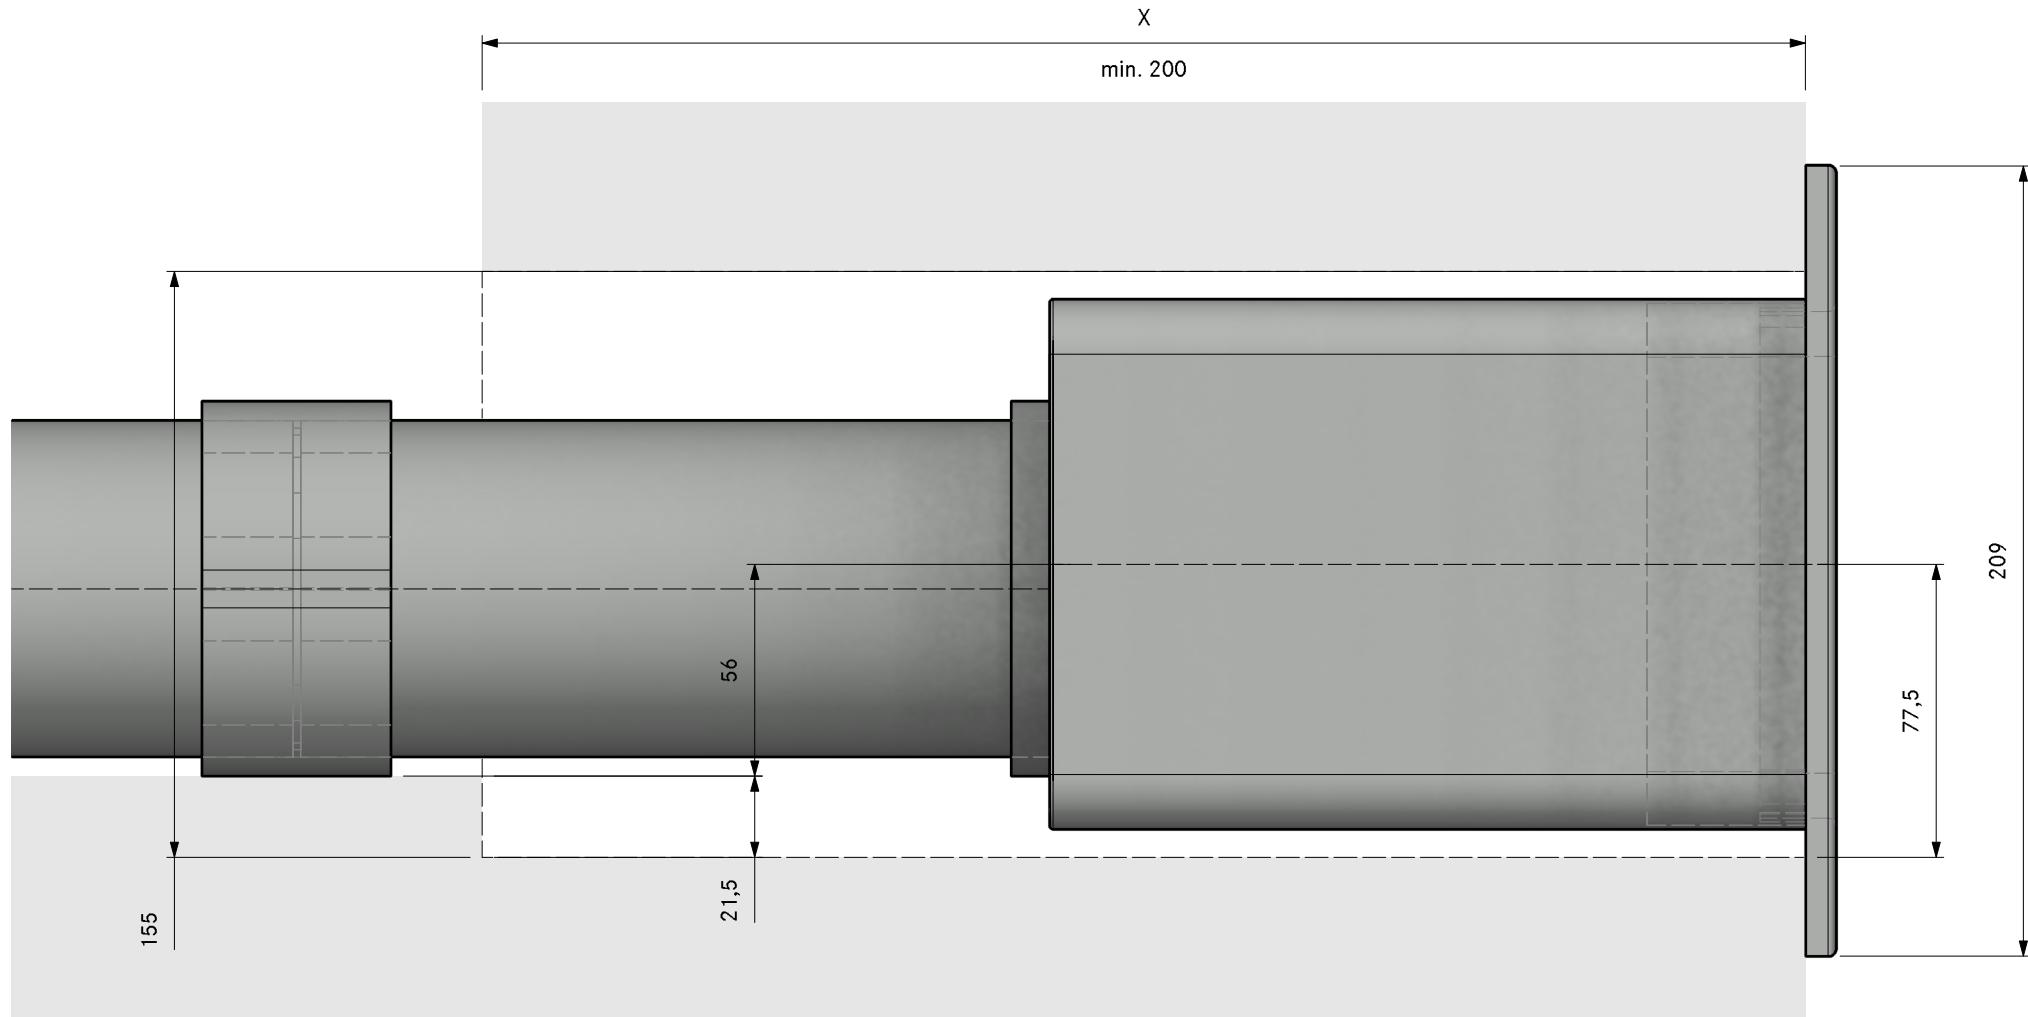




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
1	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

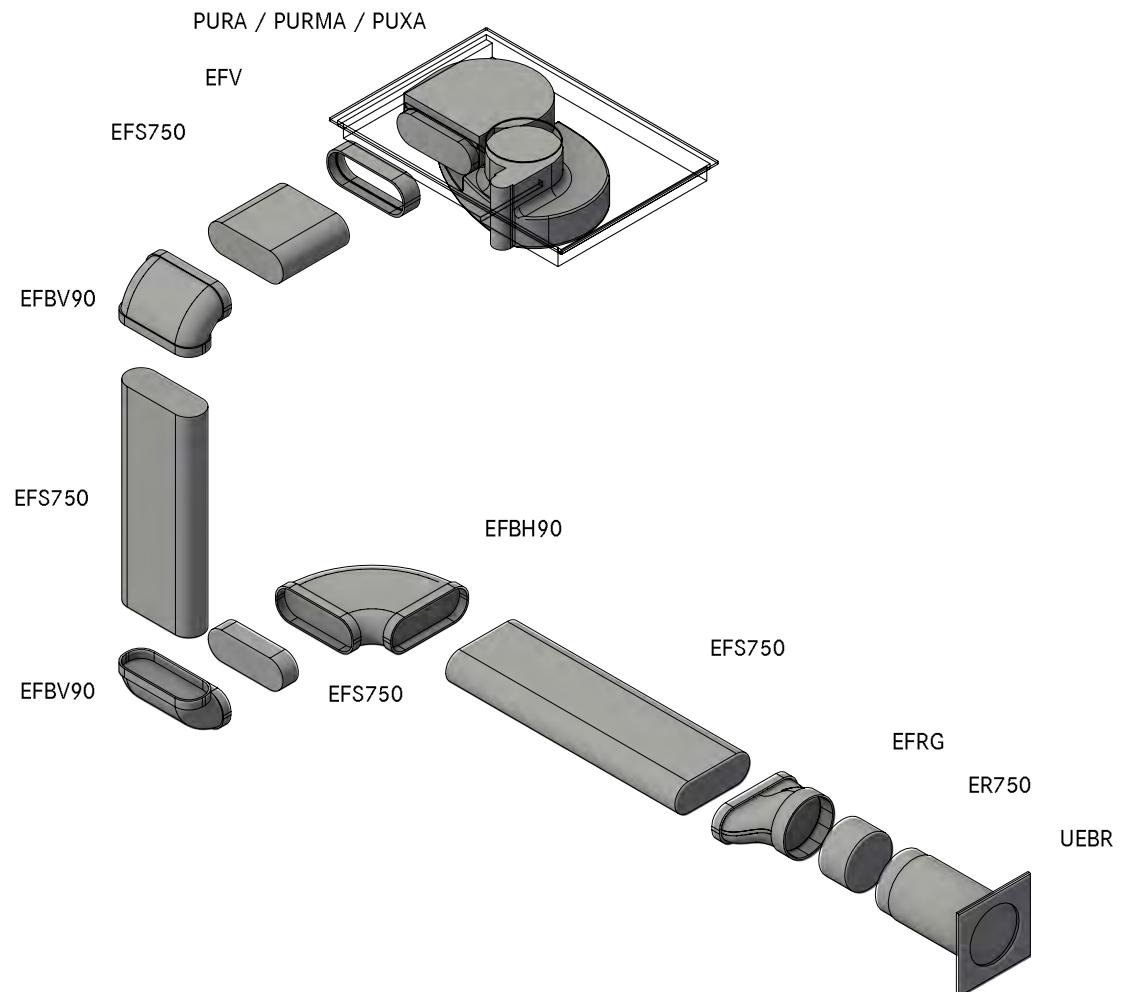

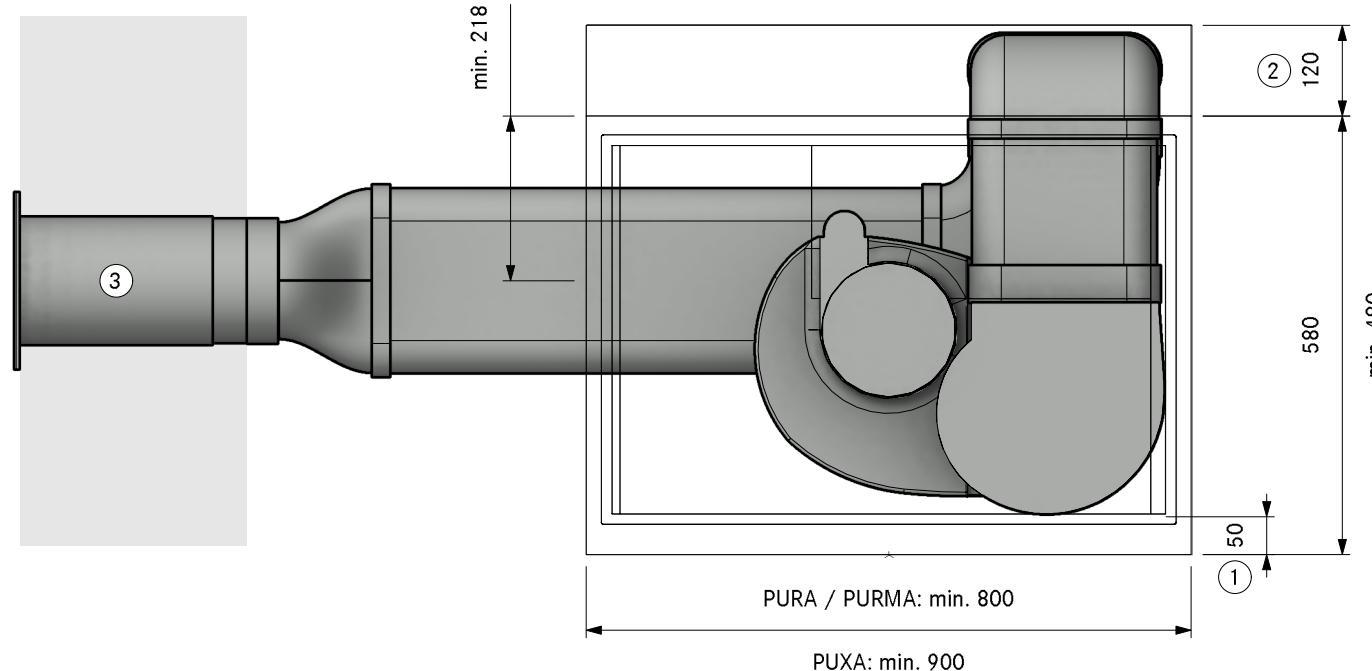

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA20420  
(X/M)Pure Plinth left UEBR

SA

Version, 1.0

**BORA**

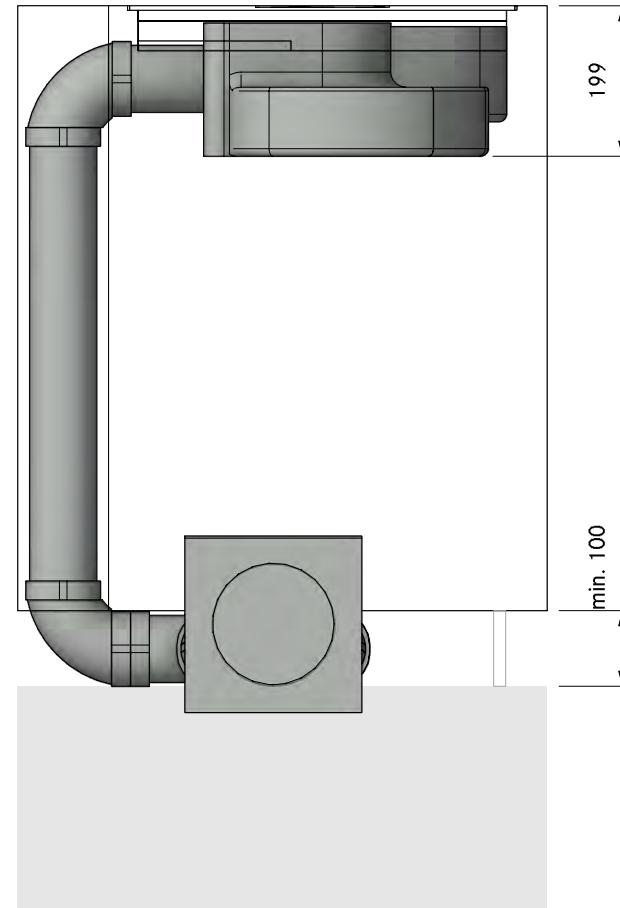

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA20420  
(X/M)Pure Plinth left UEBR

LAYOUT FA

Version, 1.0


**BORA**

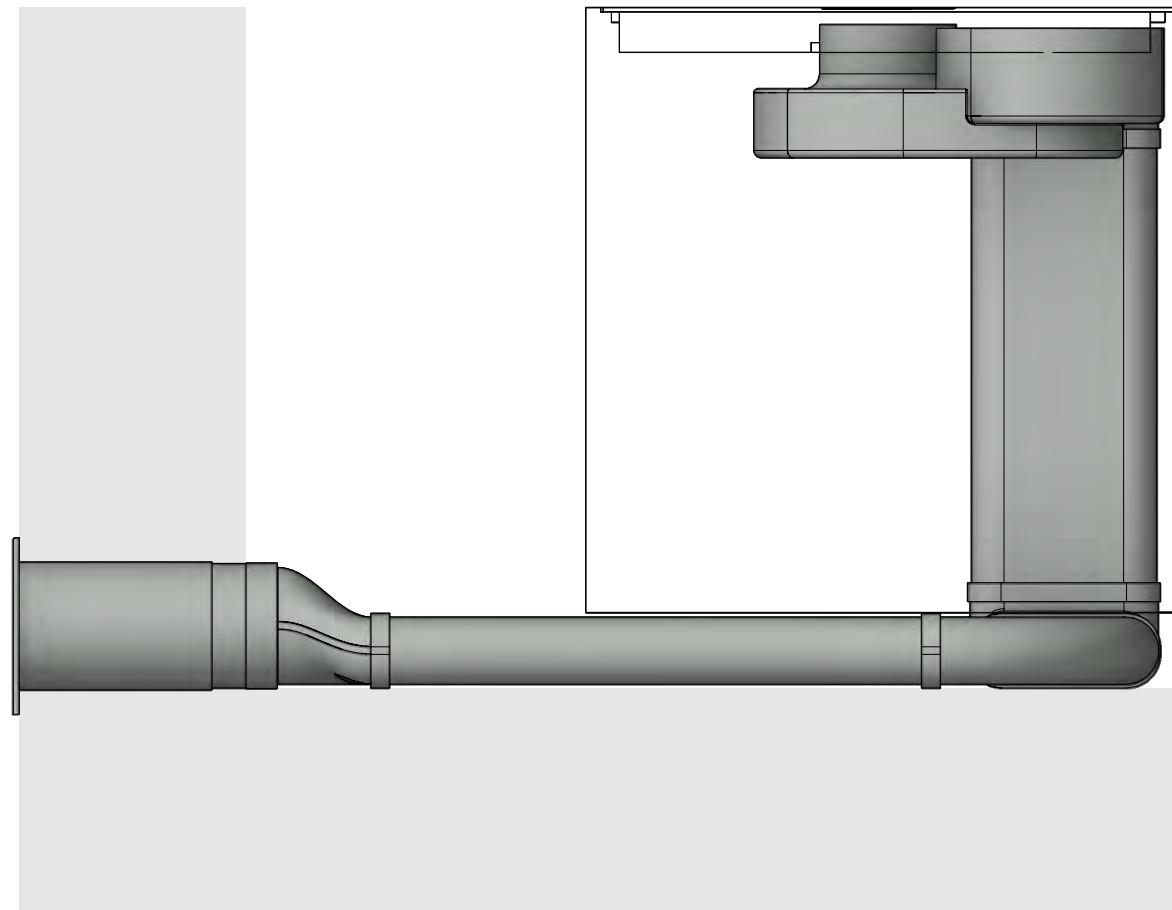


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT Detail

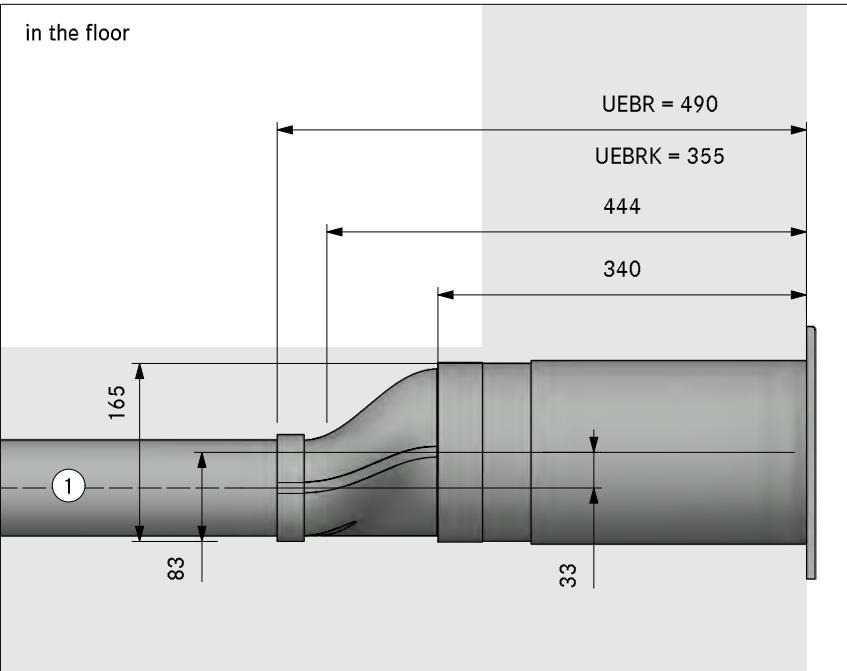


in the plinth area

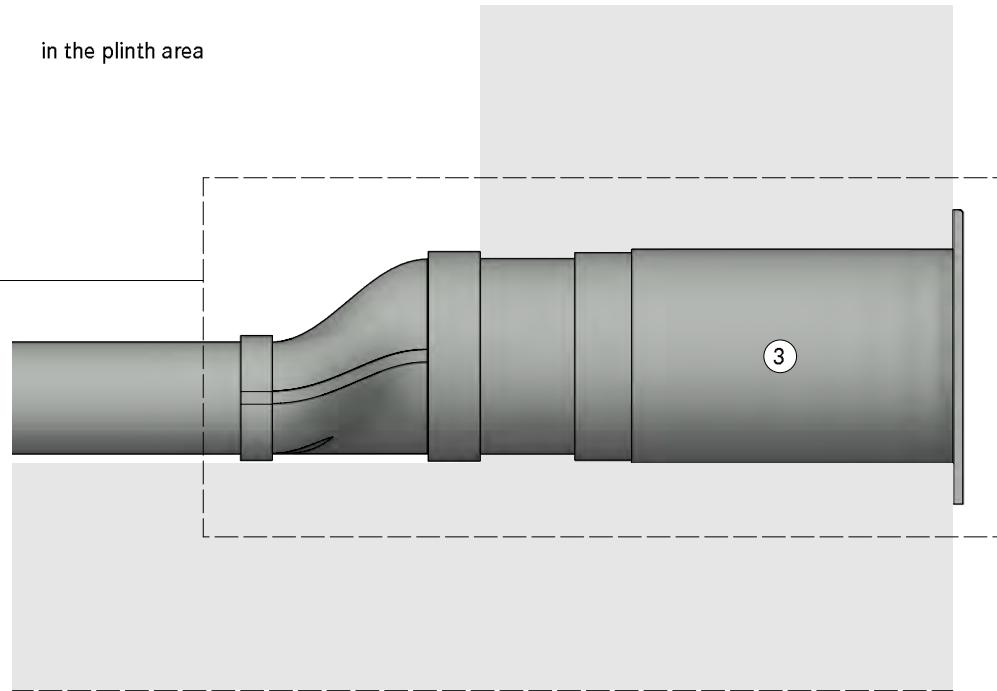

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


in the cellar

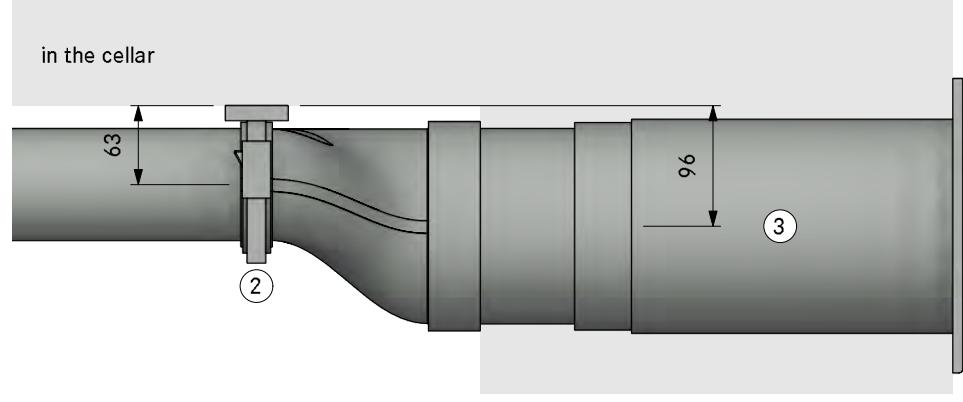




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
4	EFBV90 90° bend flat vertical
1	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

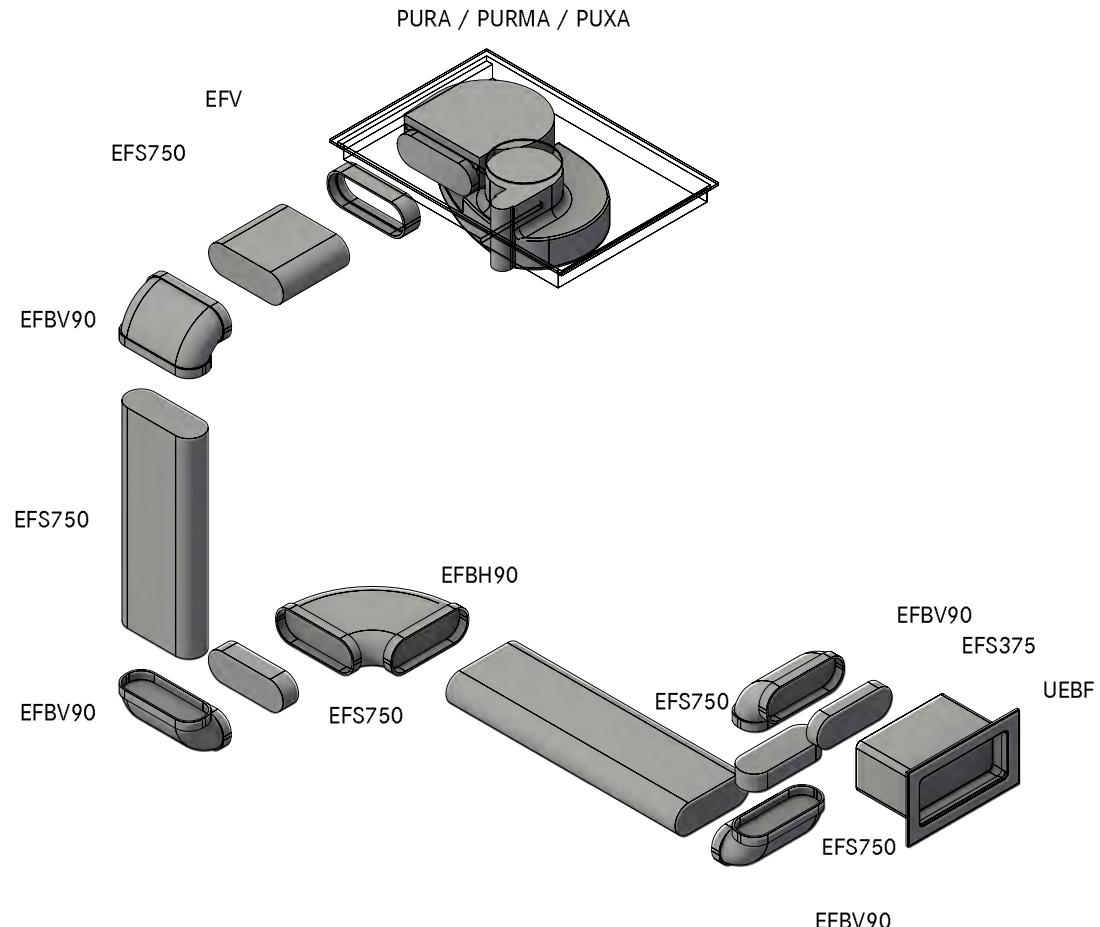

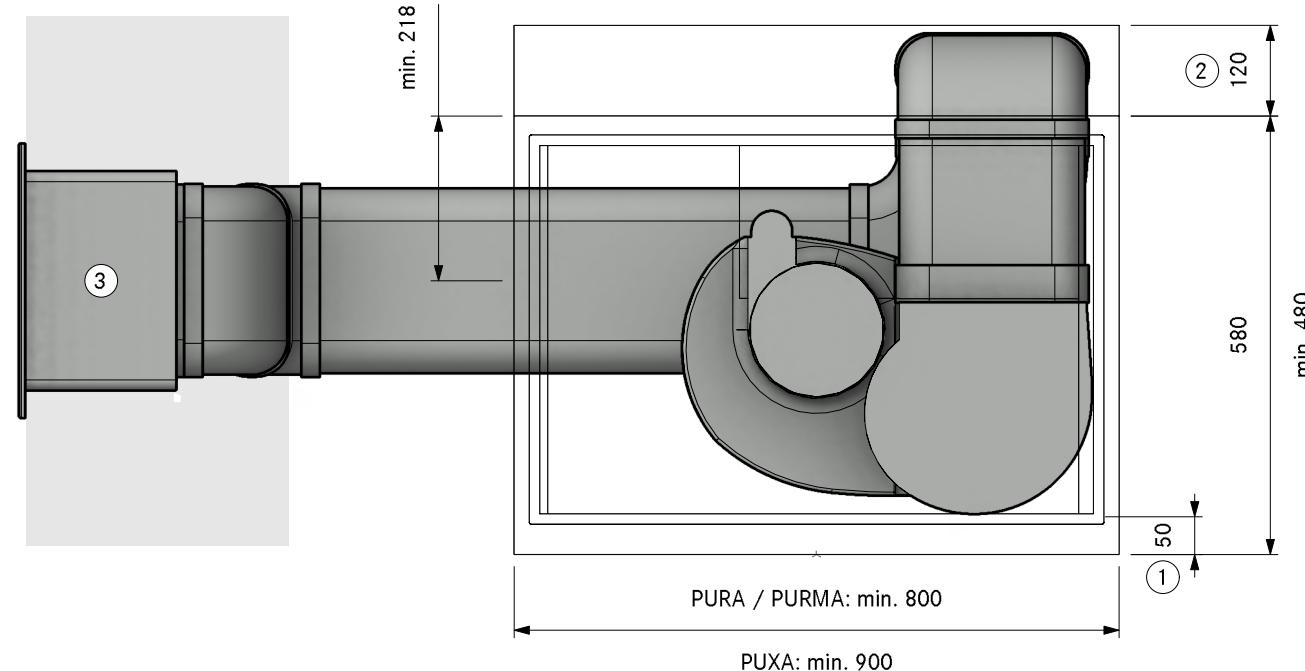

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required


3. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA20430  
(X/M)Pure Plinth left swan neck UEBF

Version, 1.0

**BORA**

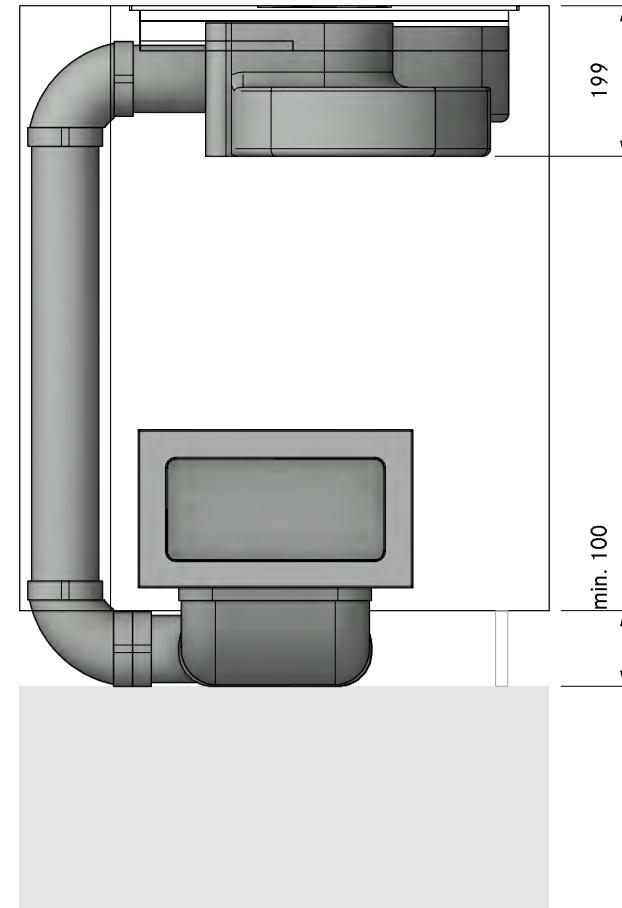

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA20430  
(X/M)Pure Plinth left swan neck UEBF


Version, 1.0

**BORA**

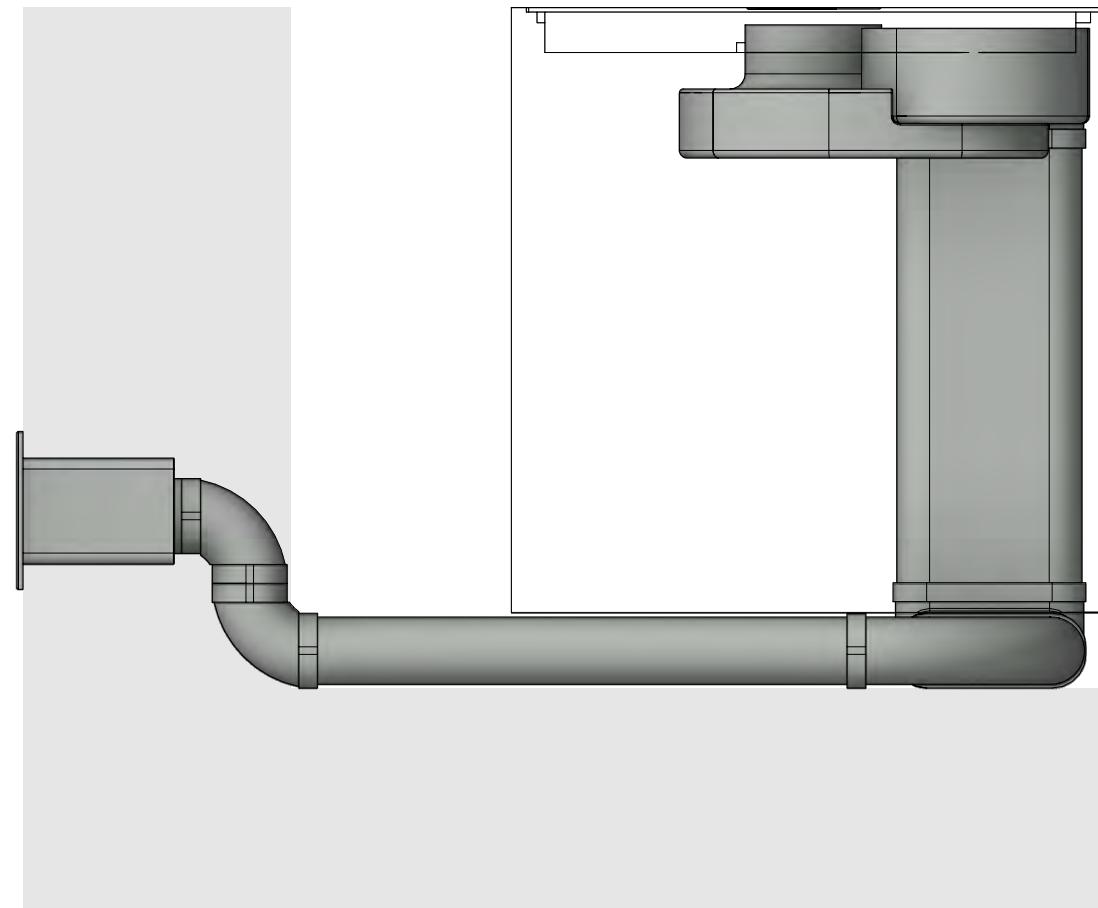

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

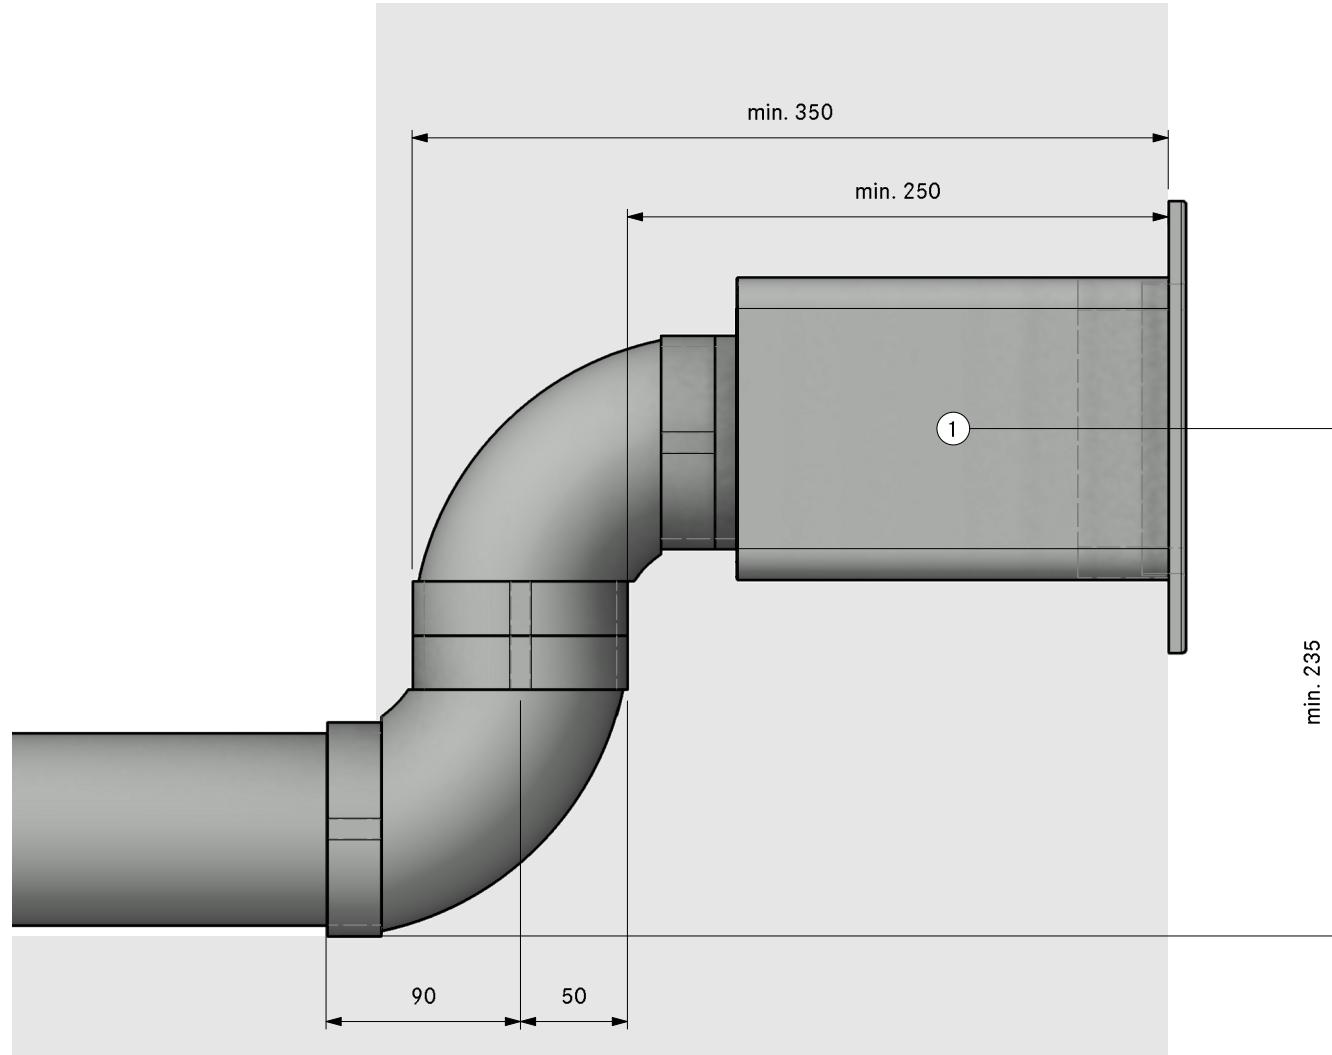



1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
1	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

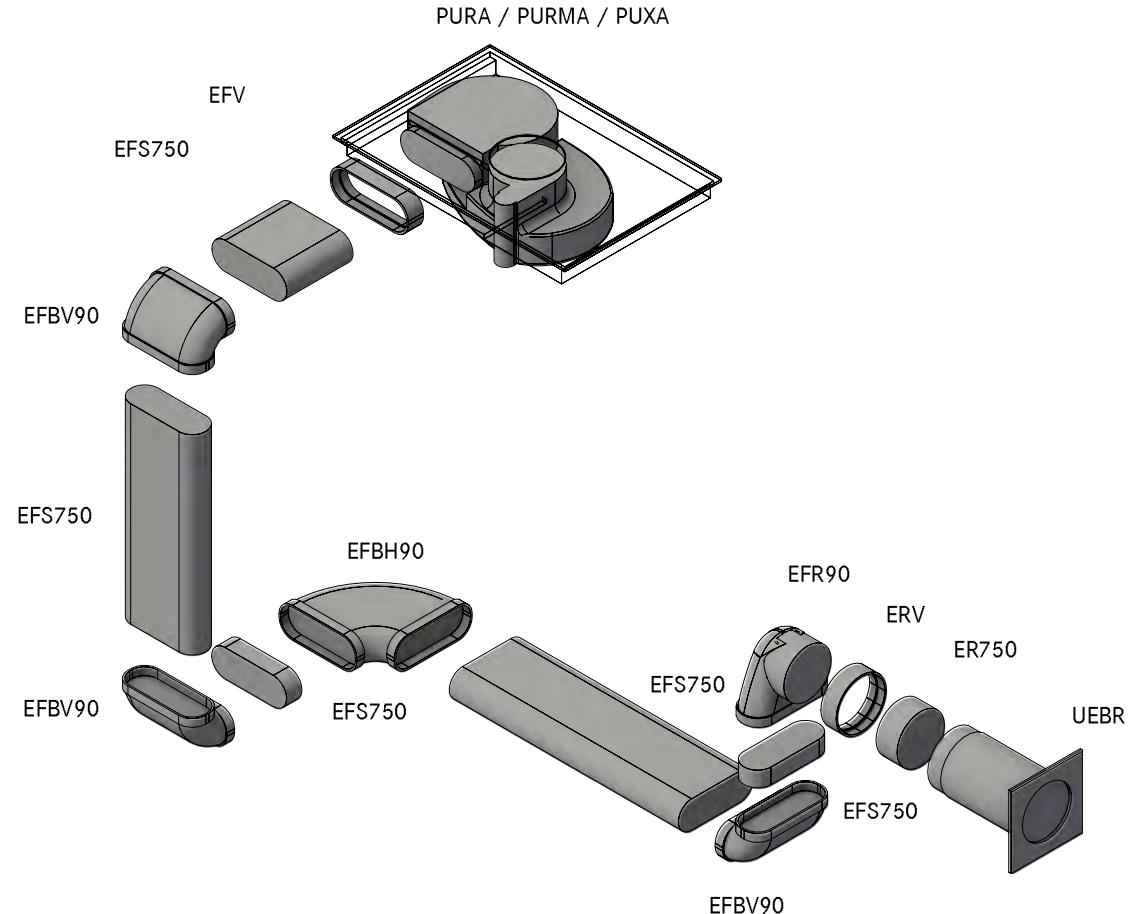

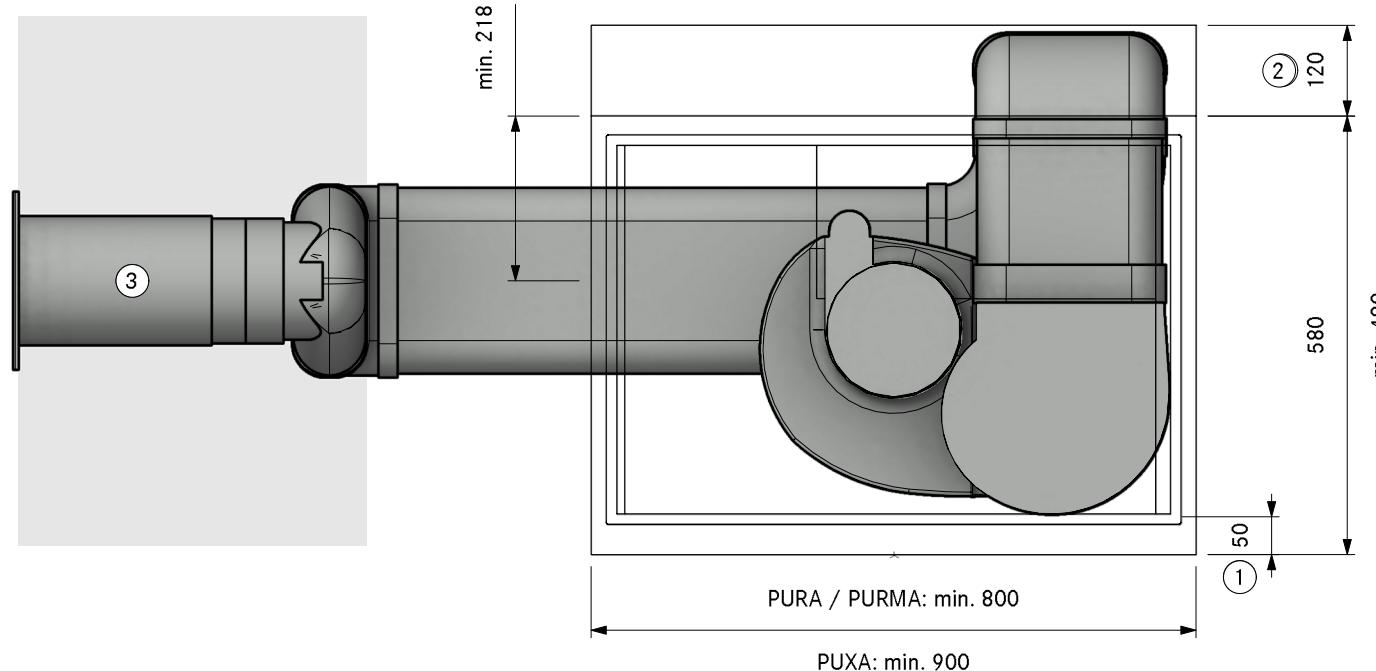

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PXPA20440  
(X)Pure Plinth left swan neck UEBR

LAYOUT SA

Version, 1.0

**BORA**

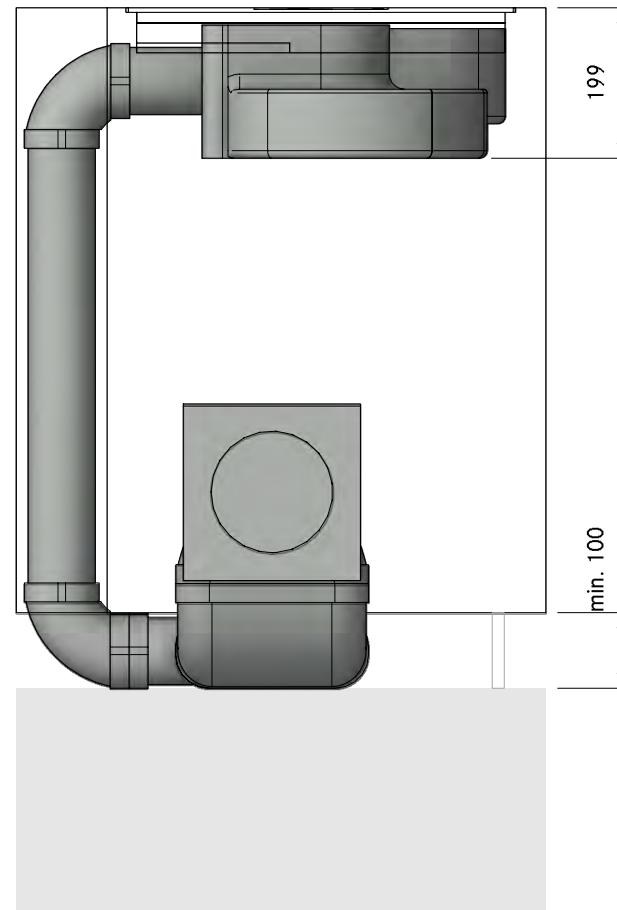

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PXPA20440  
(X)Pure Plinth left swan neck UEBR

LAYOUT FA


Version, 1.0

**BORA**

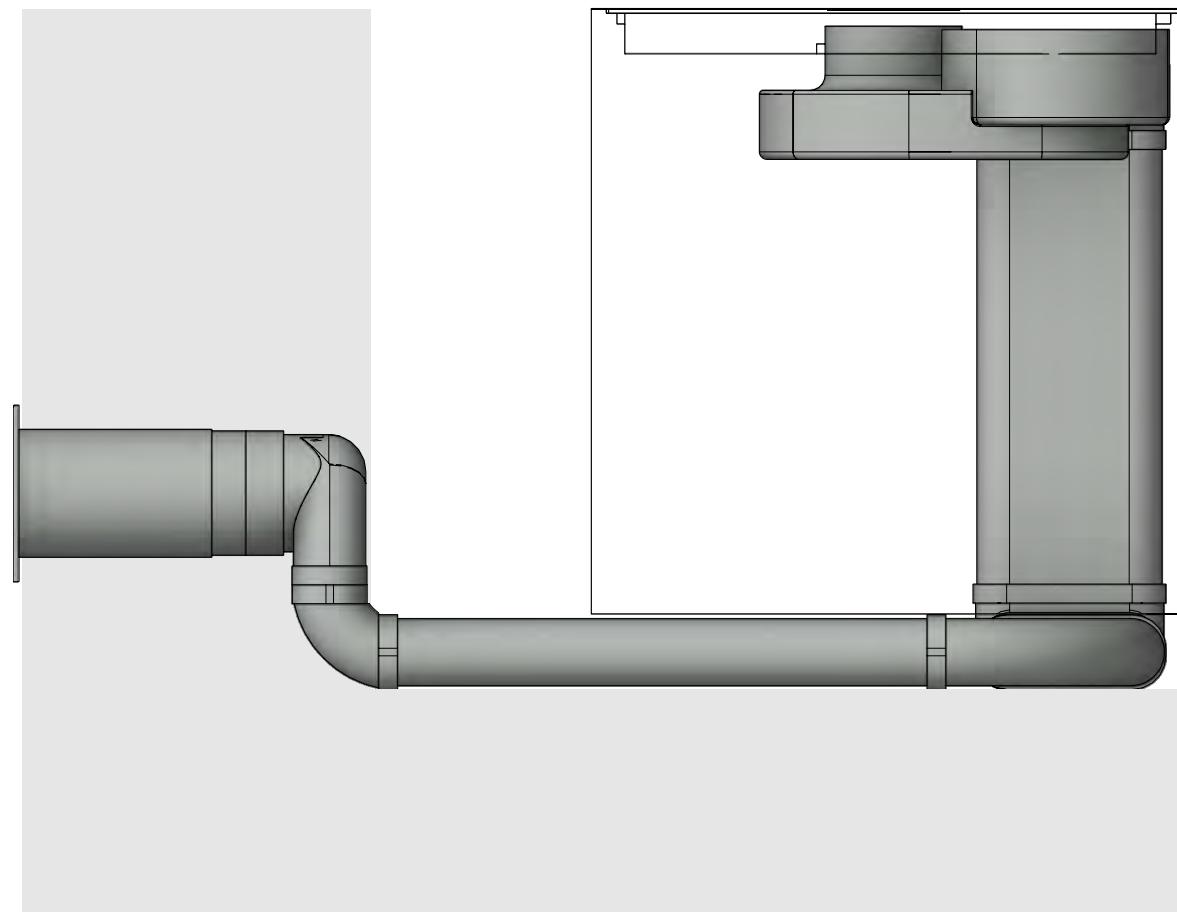

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

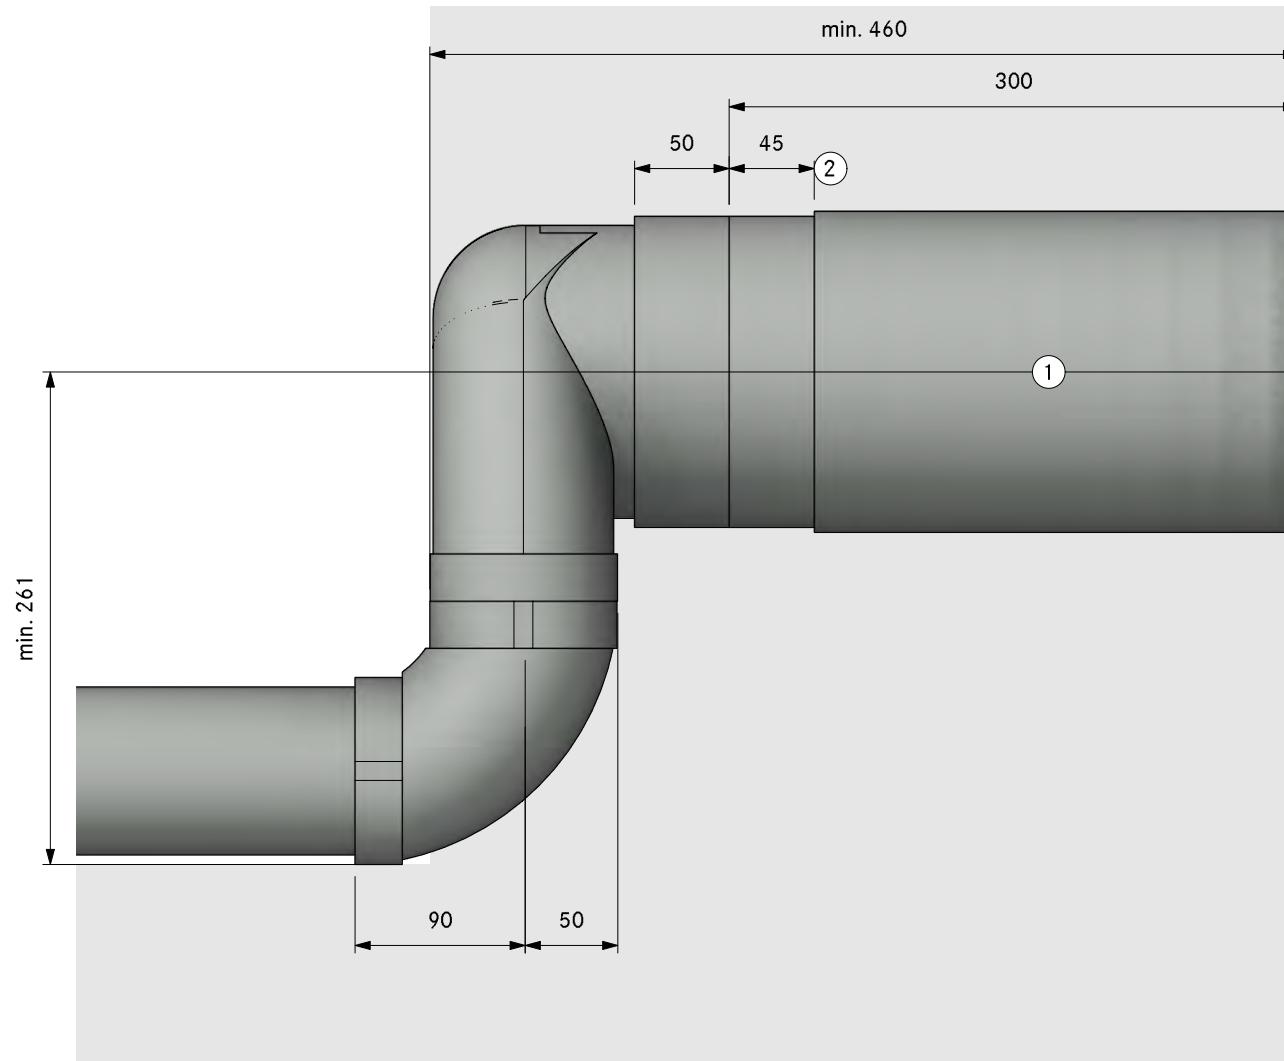

1. Hole size min. Ø 180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)


# Floor

direction of the ducting to the back . . . . .	96
direction of the ducting to the right . . . . .	120
direction of the ducting to the front. . . . .	144
direction of the ducting to the left. . . . .	168

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30110  
(X/M)Pure Floor back UEBF  
3D HK

PURA / PURMA / PUXA

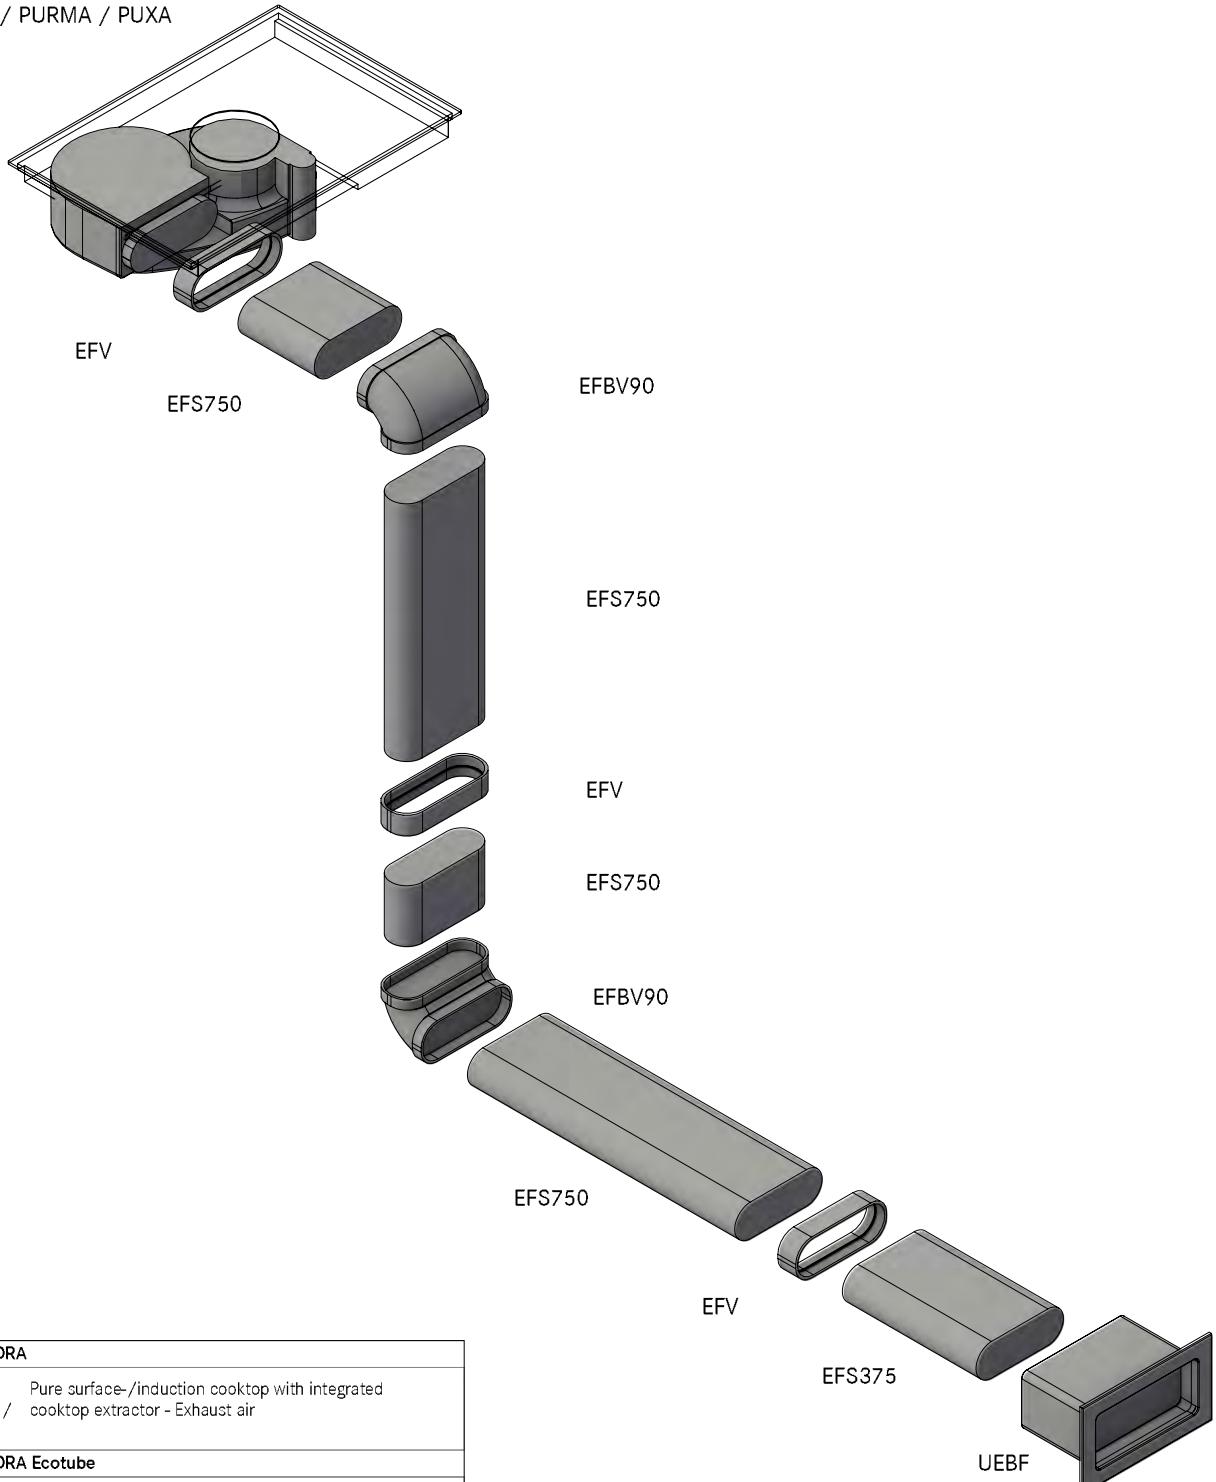


Count	Item BORA	
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA	
<b>Item BORA Ecotube</b>		
2	EFBV90	90° bend flat vertical
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm

*Please check for accuracy. Seals included. Are optically not displayed.*

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30110  
(X/M)Pure Floor back UEBF  
GR HK

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

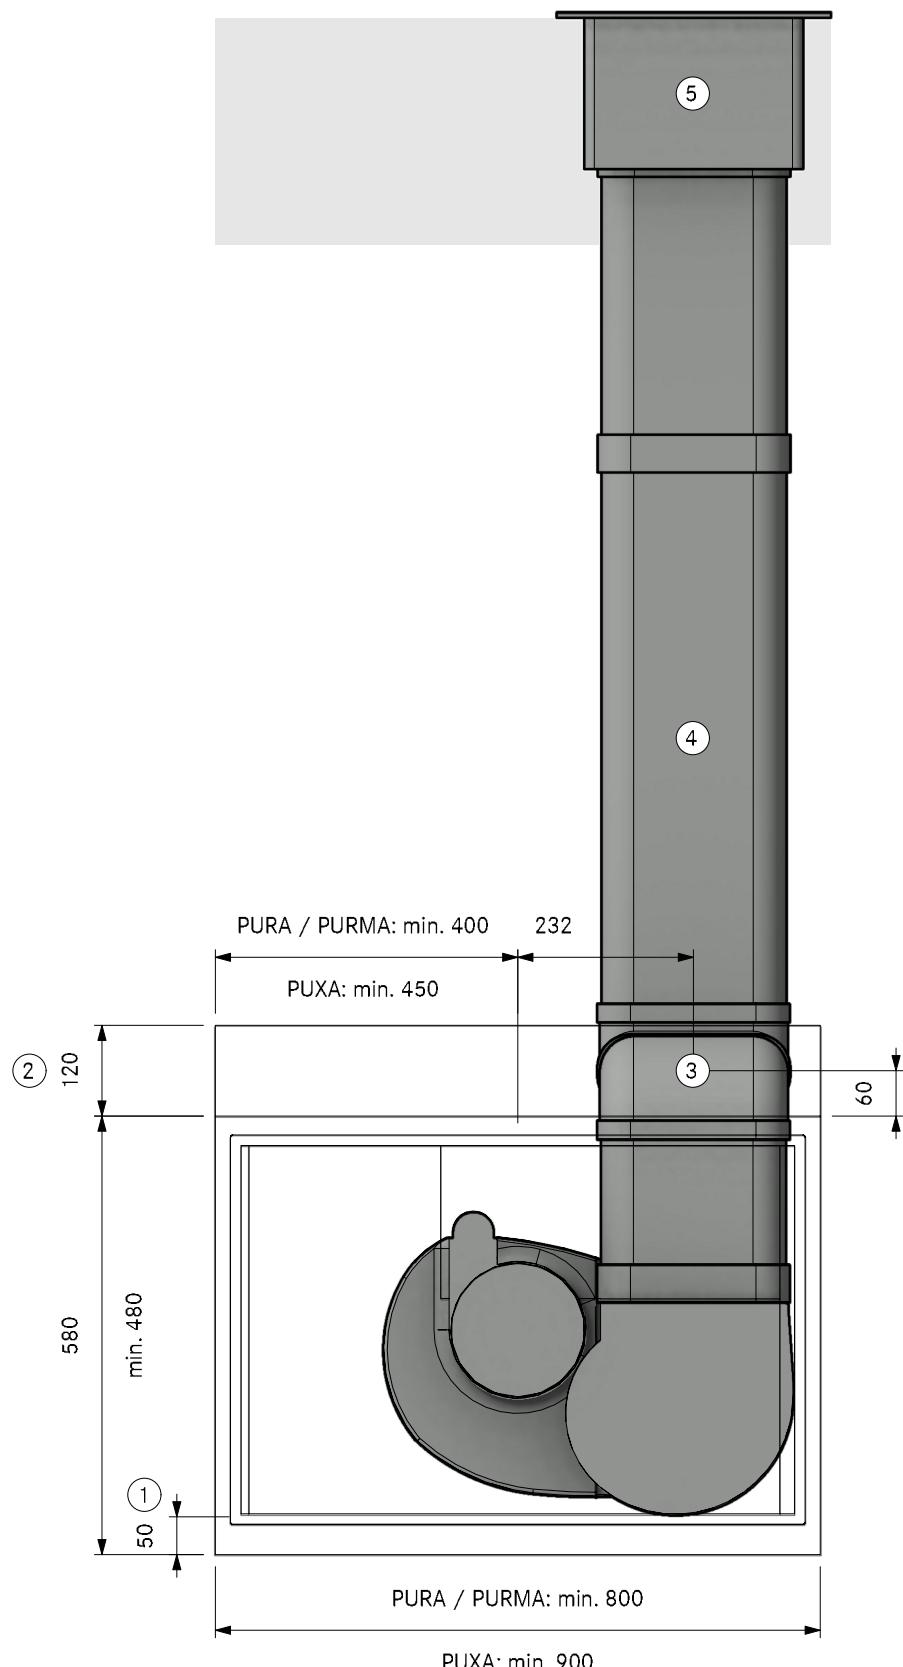


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30110  
(X/M)Pure Floor back UEBF

LAYOUT SA

Version, 1.0

**BORA**

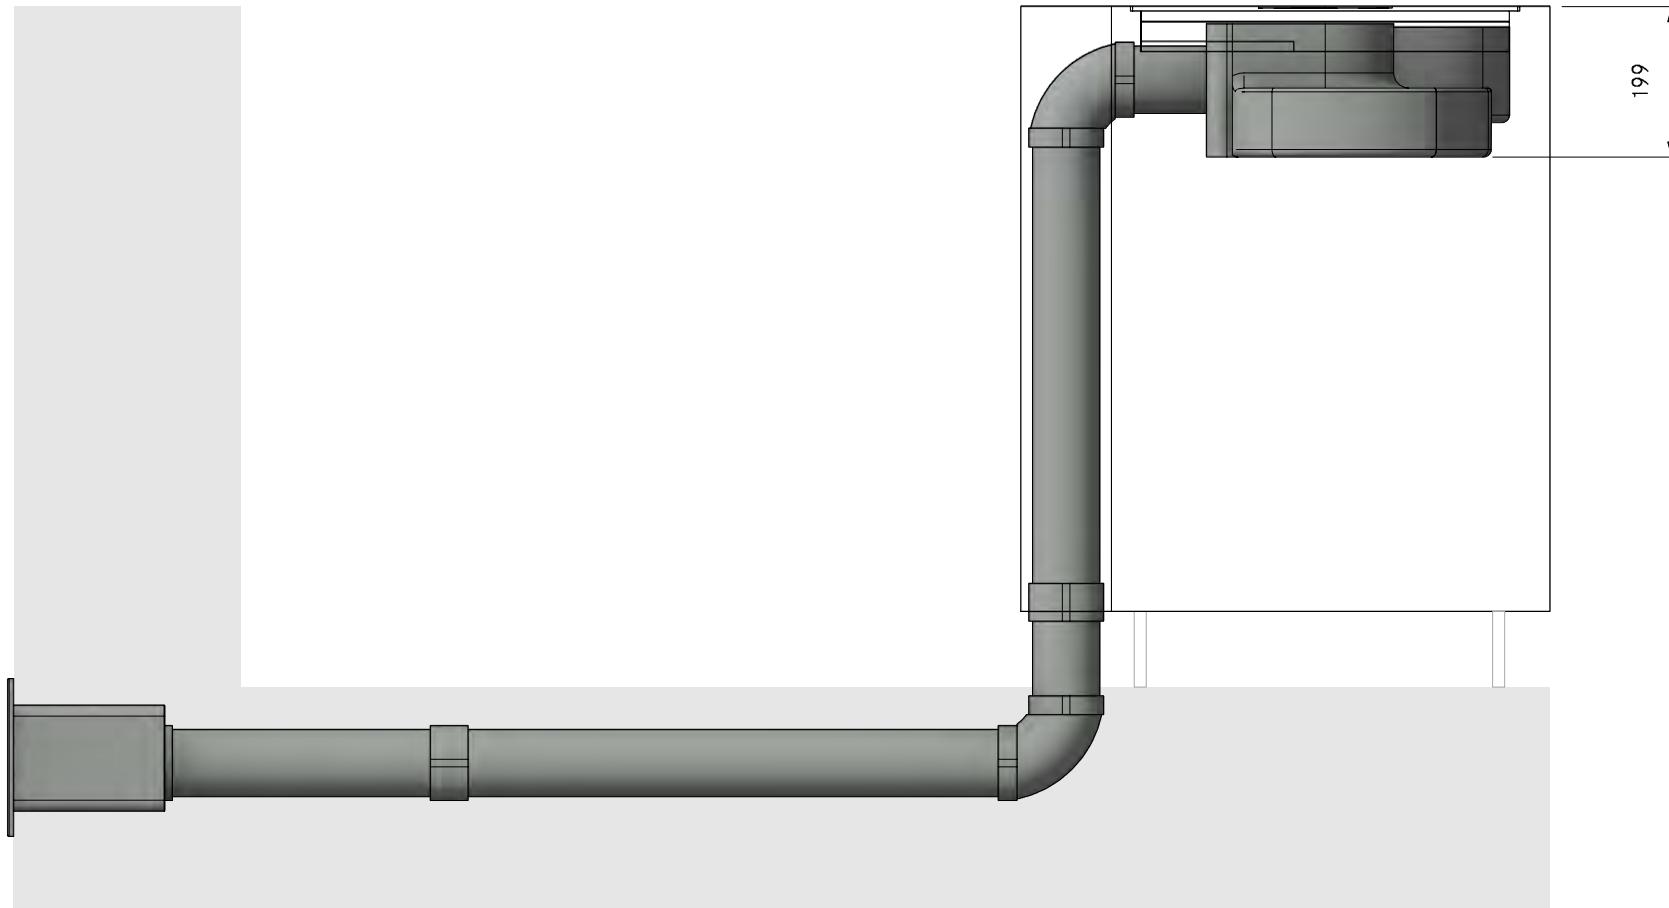

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30110  
(X/M)Pure Floor back UEBF

LAYOUT FA

Version, 1.0

**BORA**

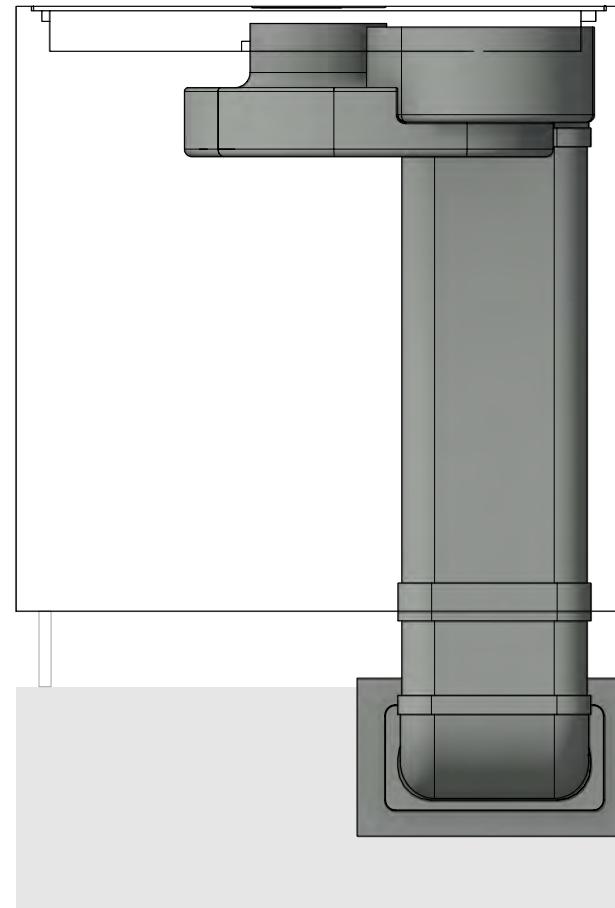

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30110  
(X/M)Pure Floor back UEBF

LAYOUT Detail

Version, 1.0

**BORA**

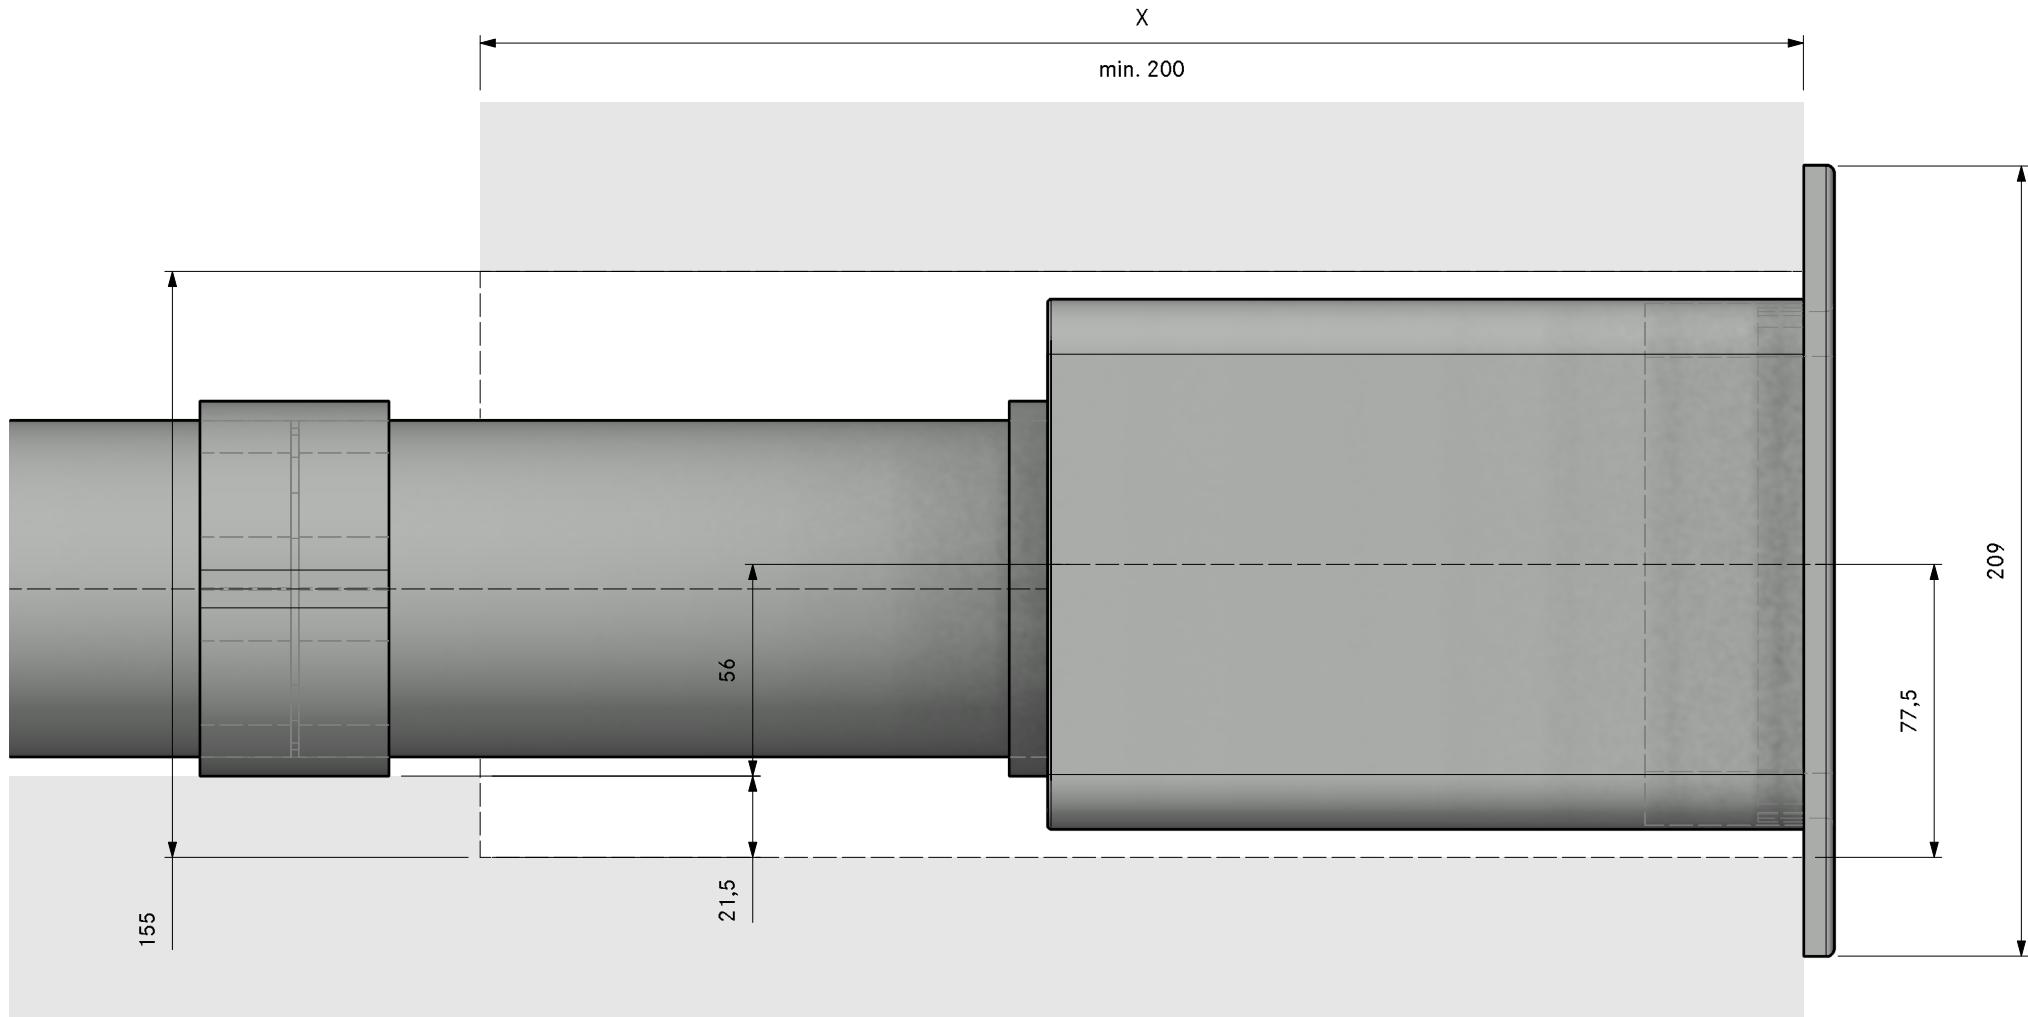

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30120  
(X/M)Pure Floor back UEBR  
3D HK

PURA / PURMA / PUXA

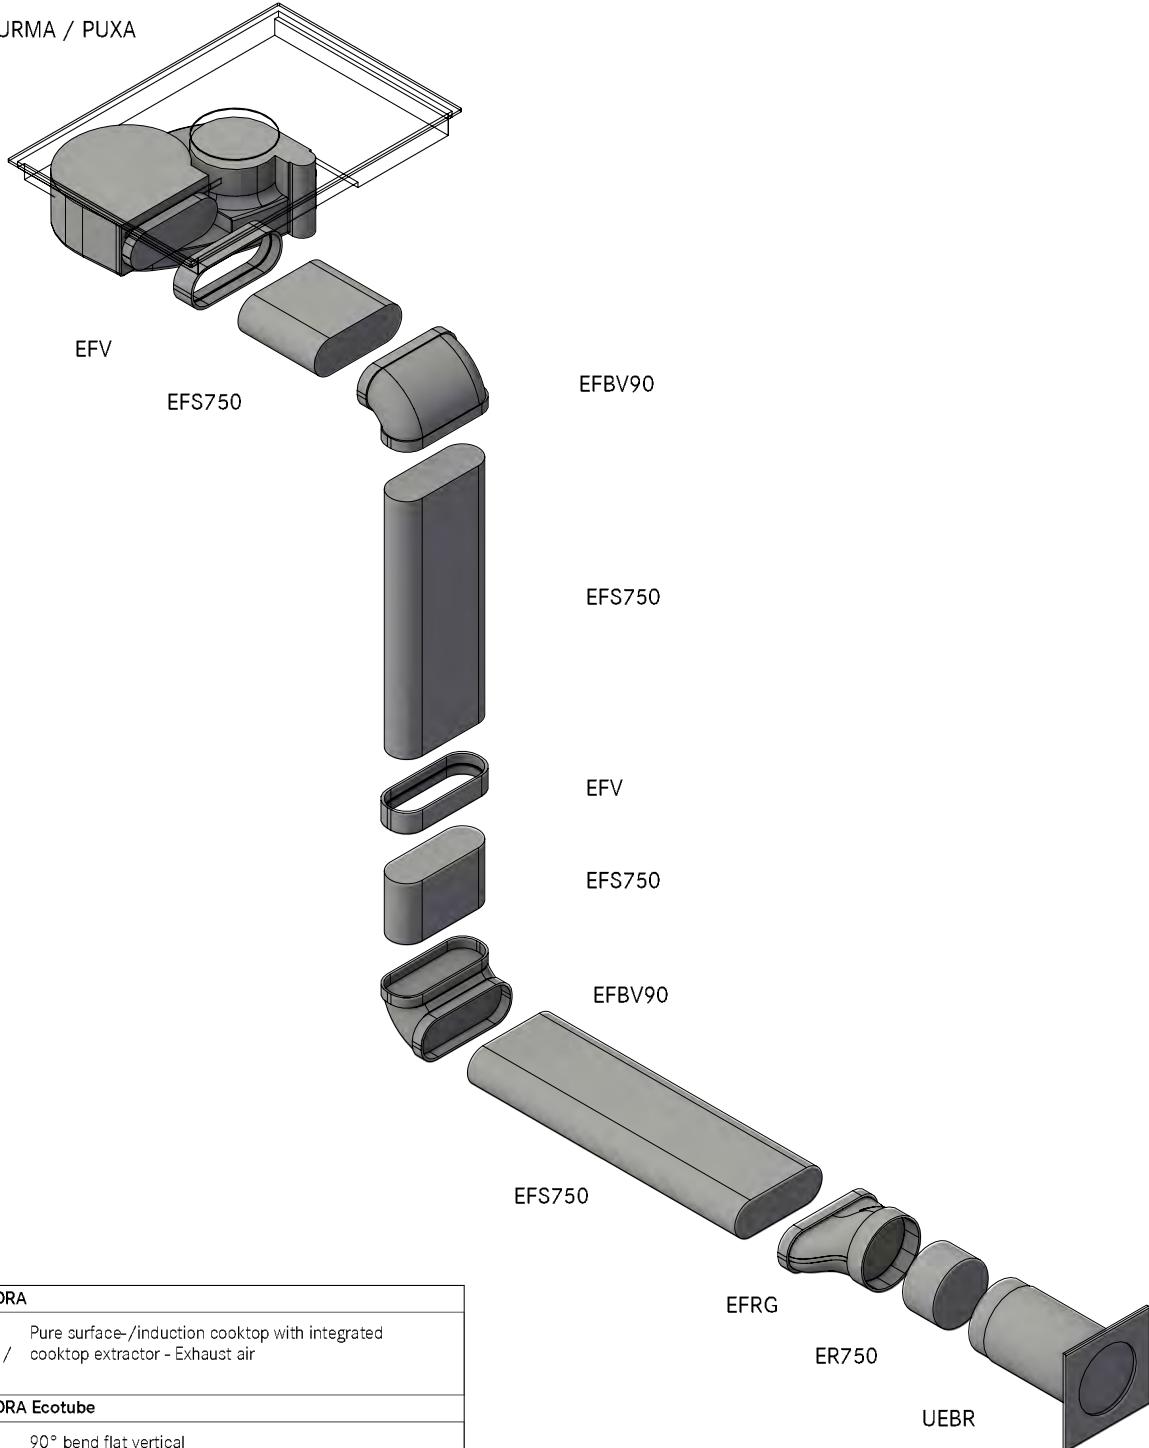


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
2	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

*Please check for accuracy. Seals included. Are optically not displayed.*

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30120  
(X/M)Pure Floor back UEBR  
GR HK

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

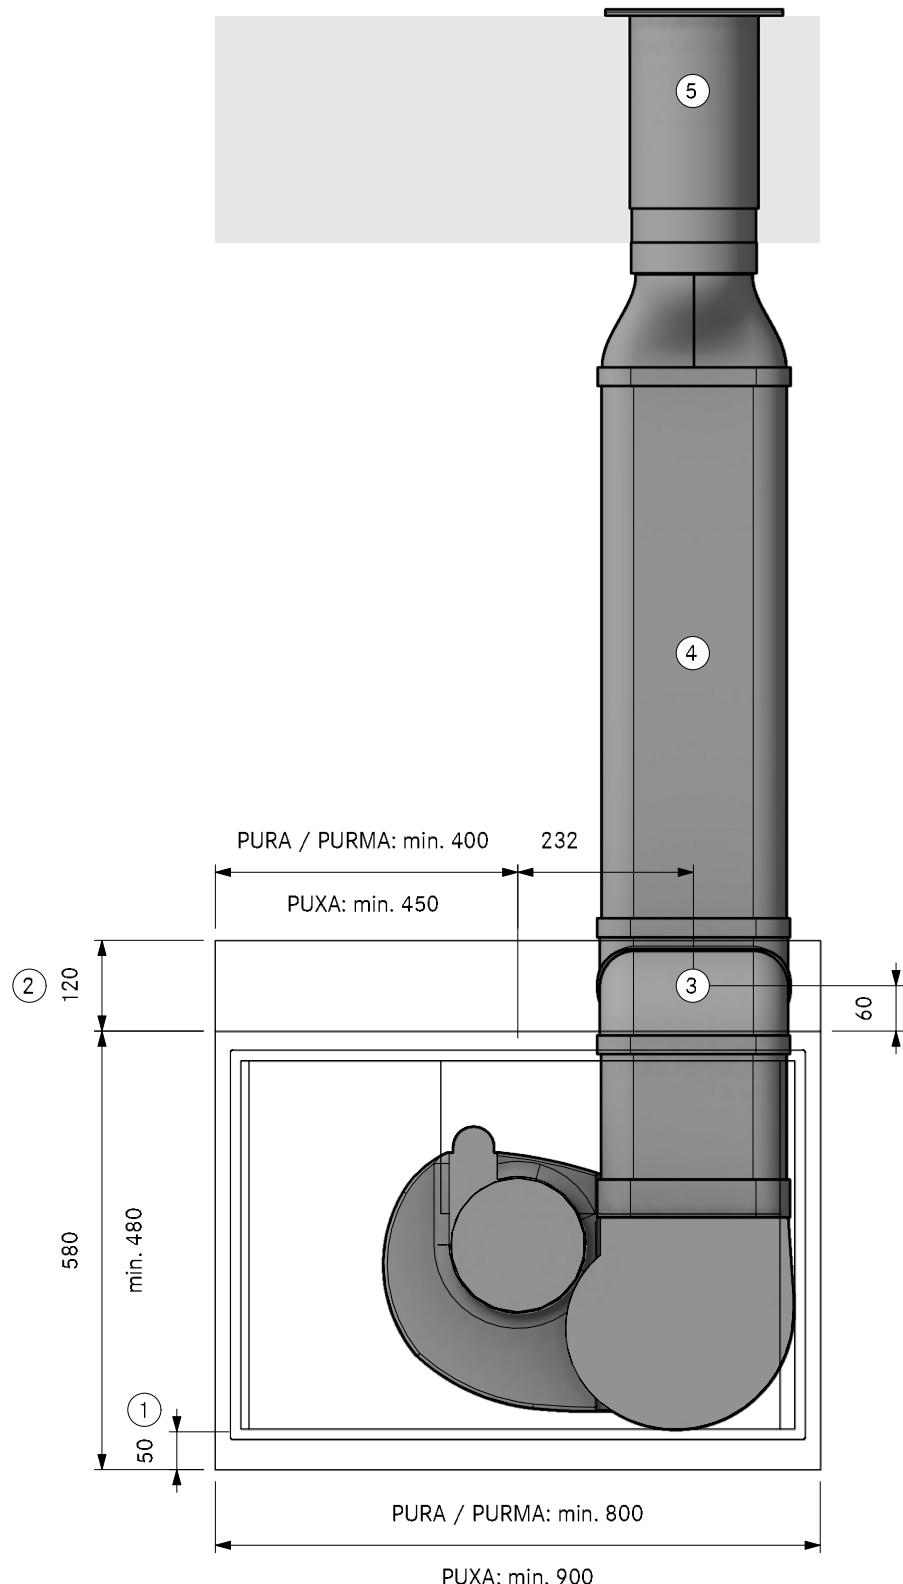


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30120  
(X/M)Pure Floor back UEBR  
SA

Version, 1.0

**BORA**

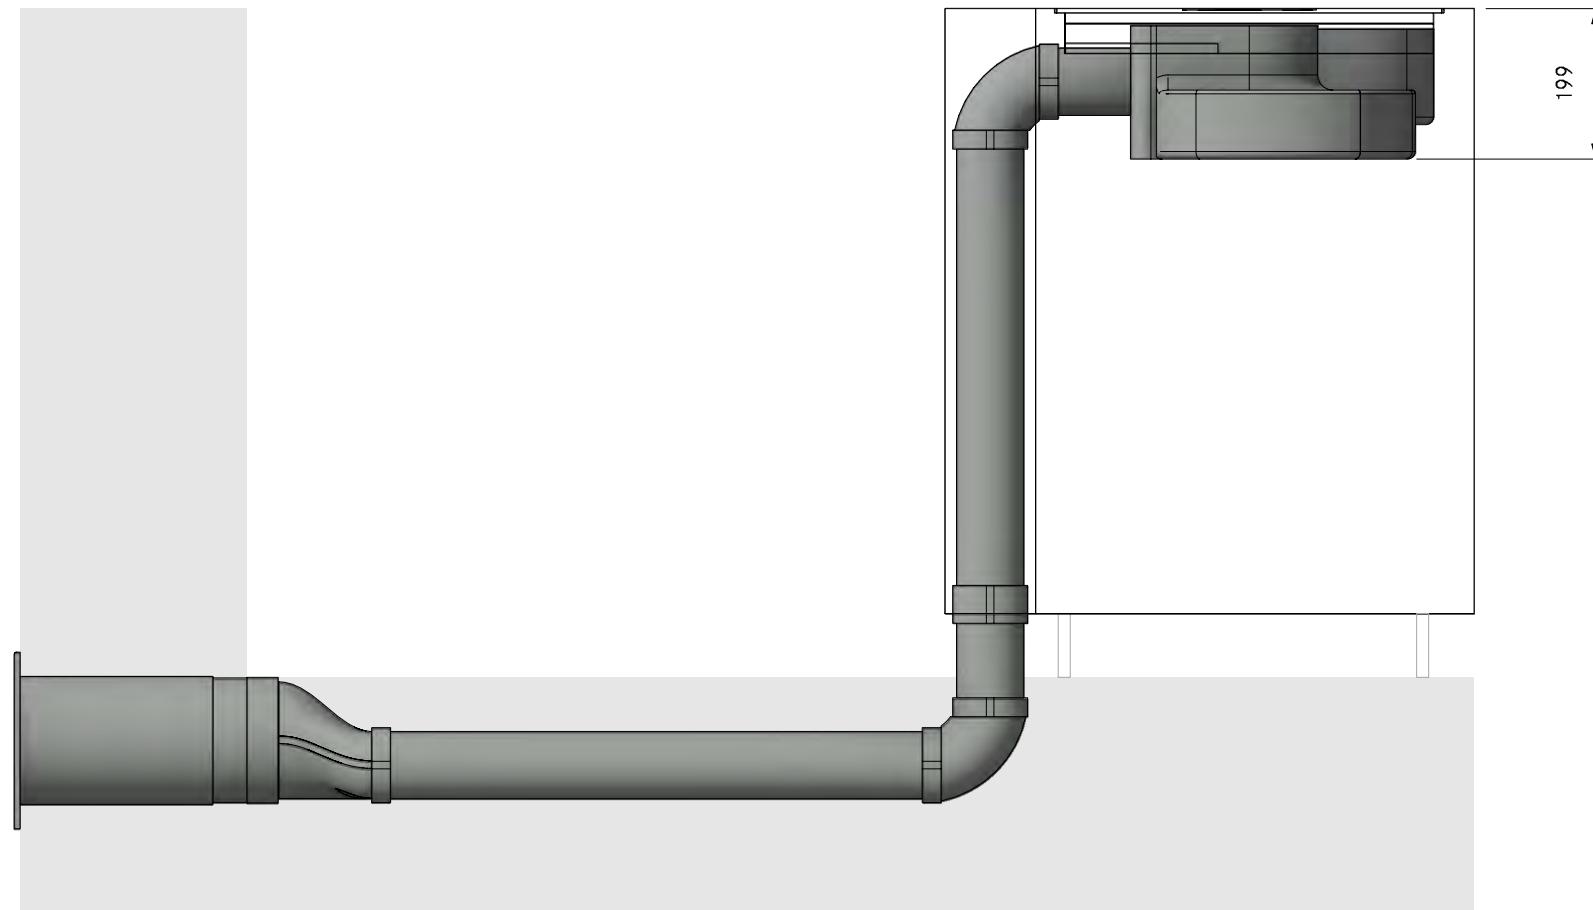

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA30120  
(X/M)Pure Floor back UEBR

LAYOUT

FA

Version, 1.0

**BORA**

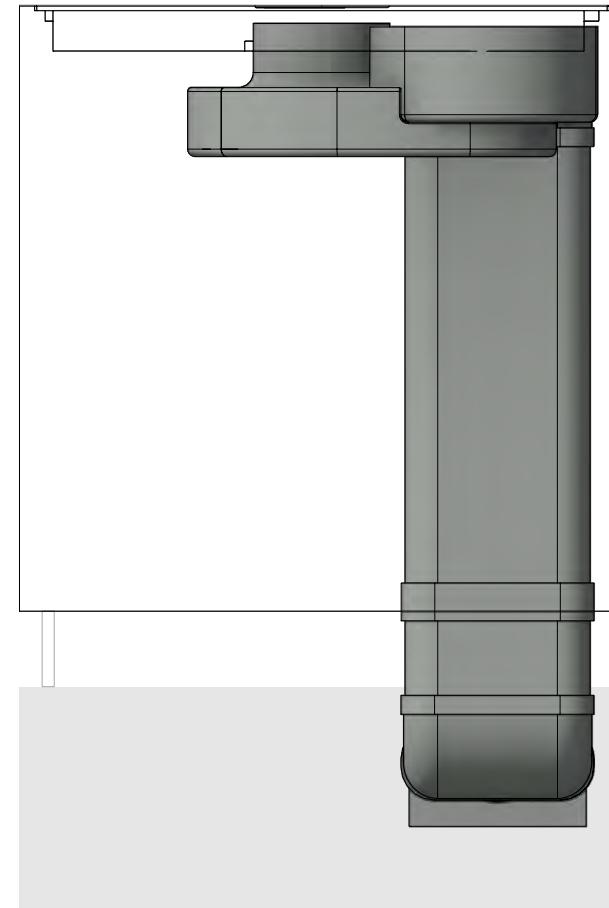


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

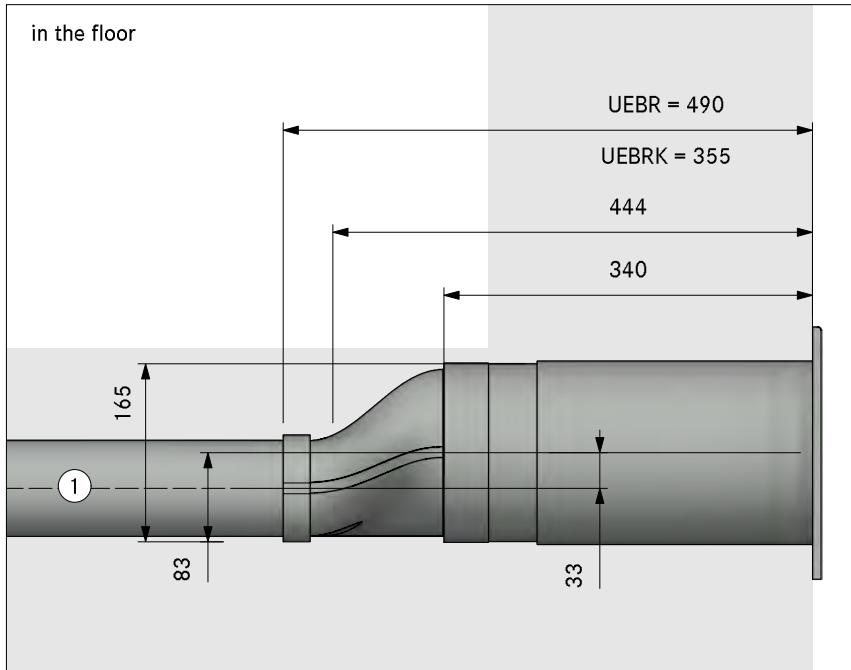

in the plinth area

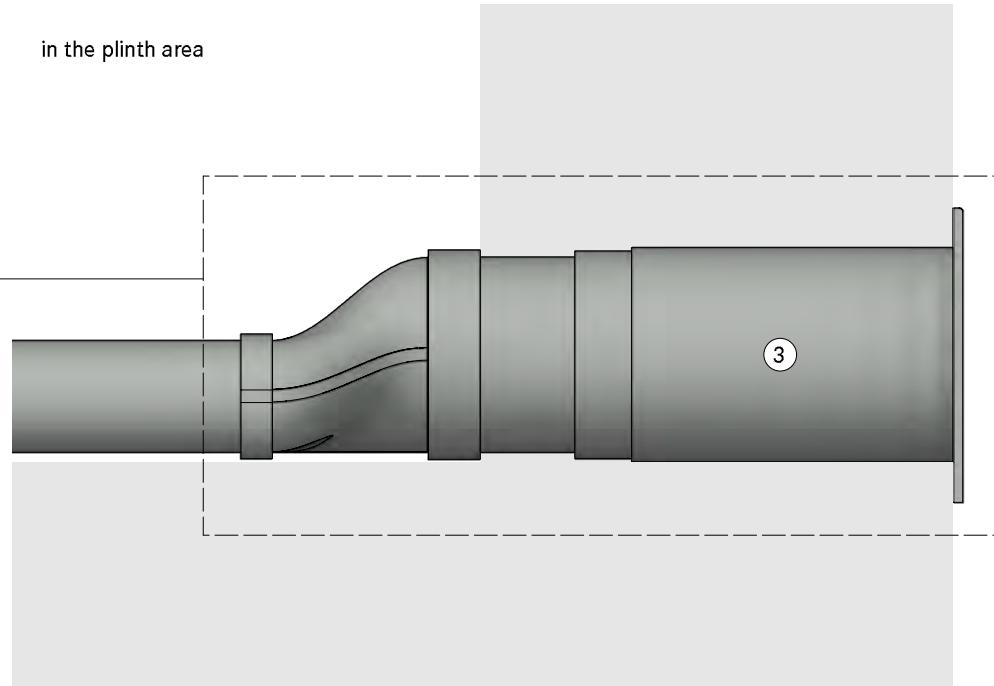

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

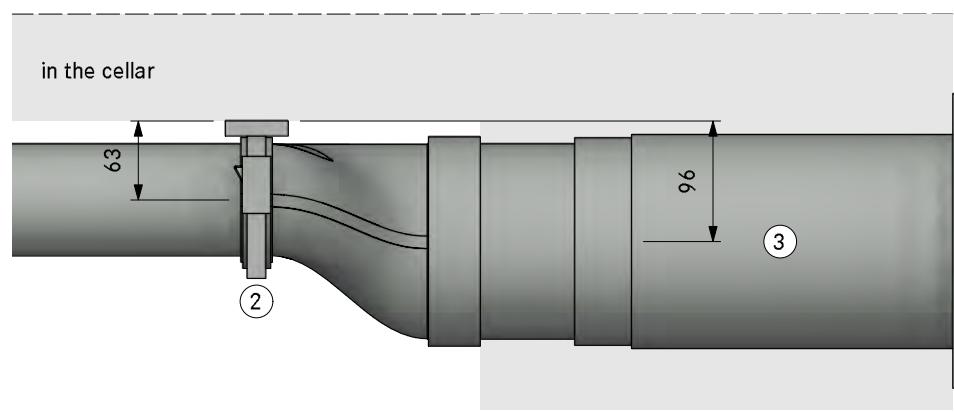




MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  

---

LAYOUT

PA30130  
(X/M)Pure Floor back swan neck UEBF



LAYOUT 3D HK

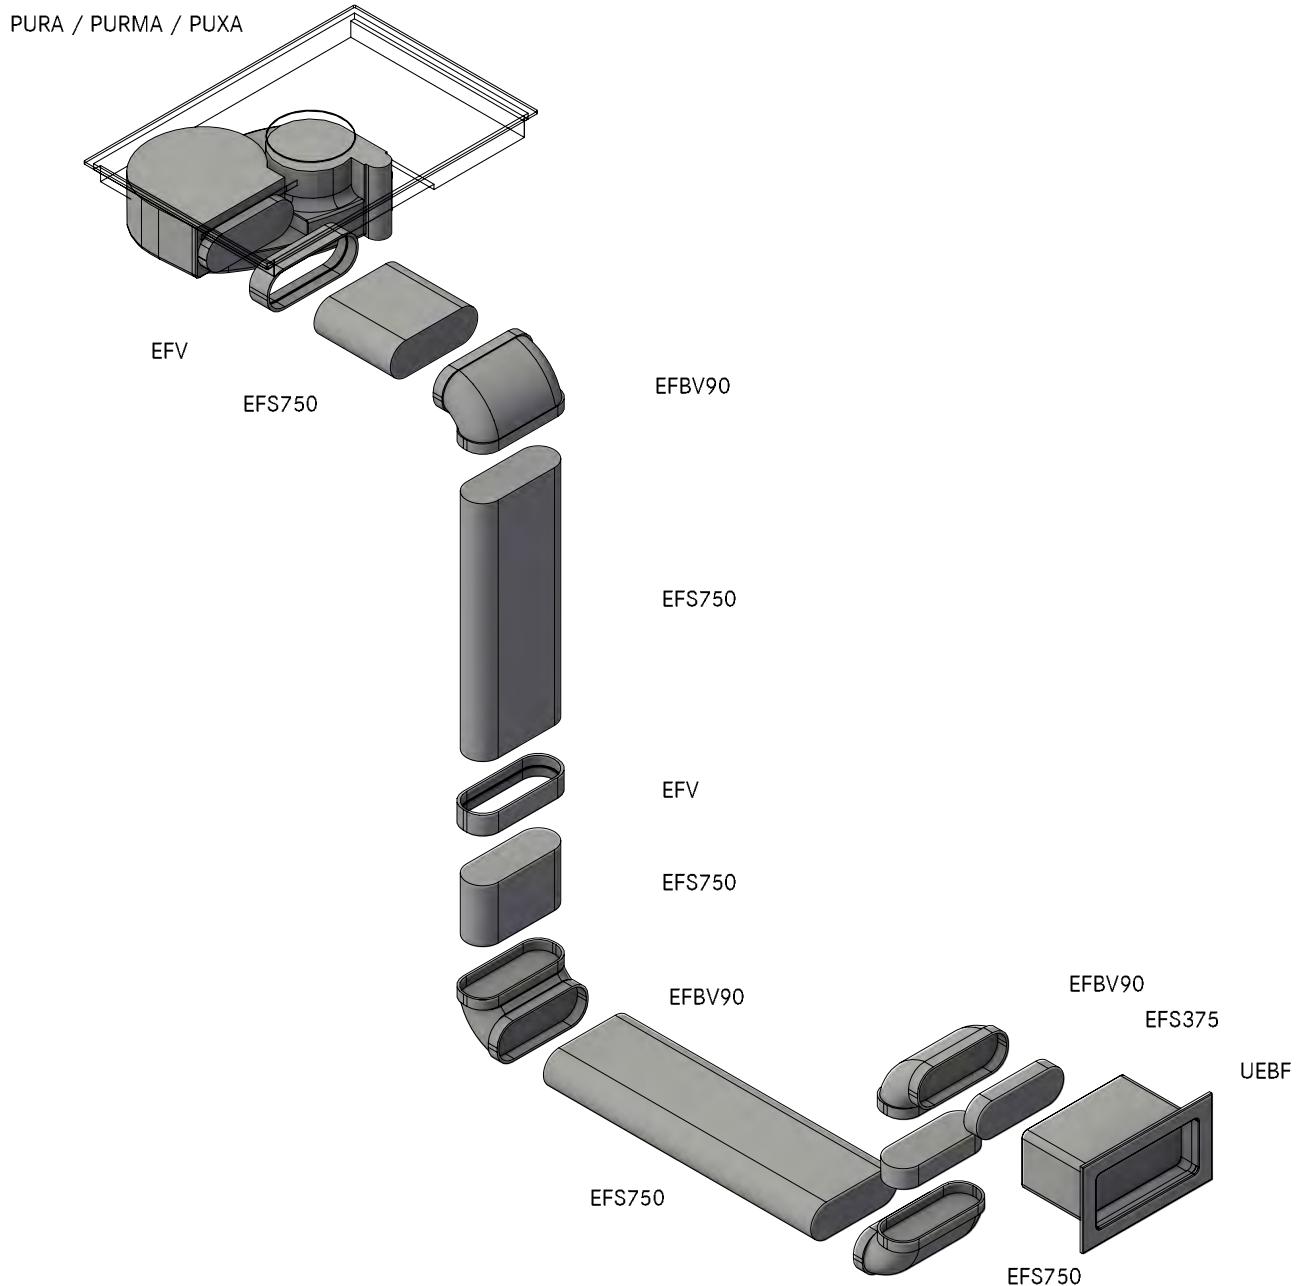

Count	Item BORA	
1	PURA / PURMA / PUXA	Pure surface-/induction cooktop with integrated cooktop extractor - Exhaust air
<b>Item BORA Ecotube</b>		
4	EFBV90	90° bend flat vertical
2	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EF\$750	shallow duct with partition 750mm

EFBV90

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

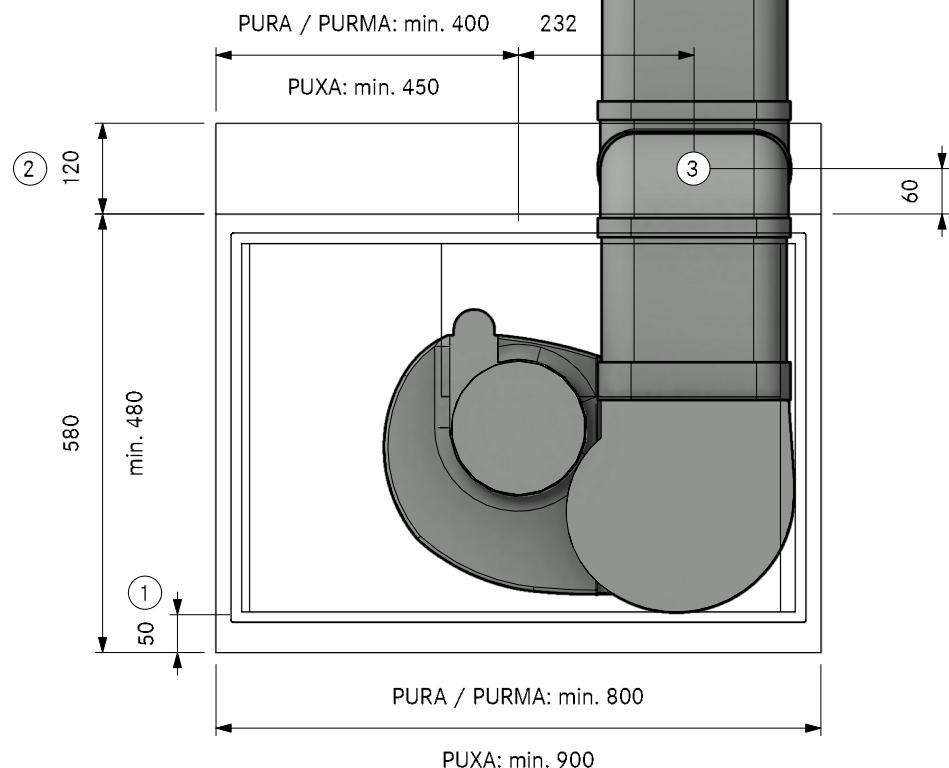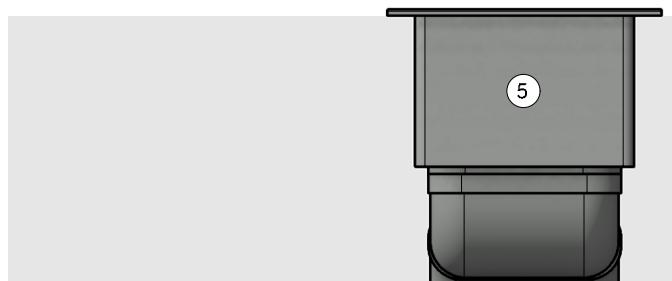


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30130  
(X/M)Pure Floor back swan neck UEBF

Version, 1.0

**BORA**

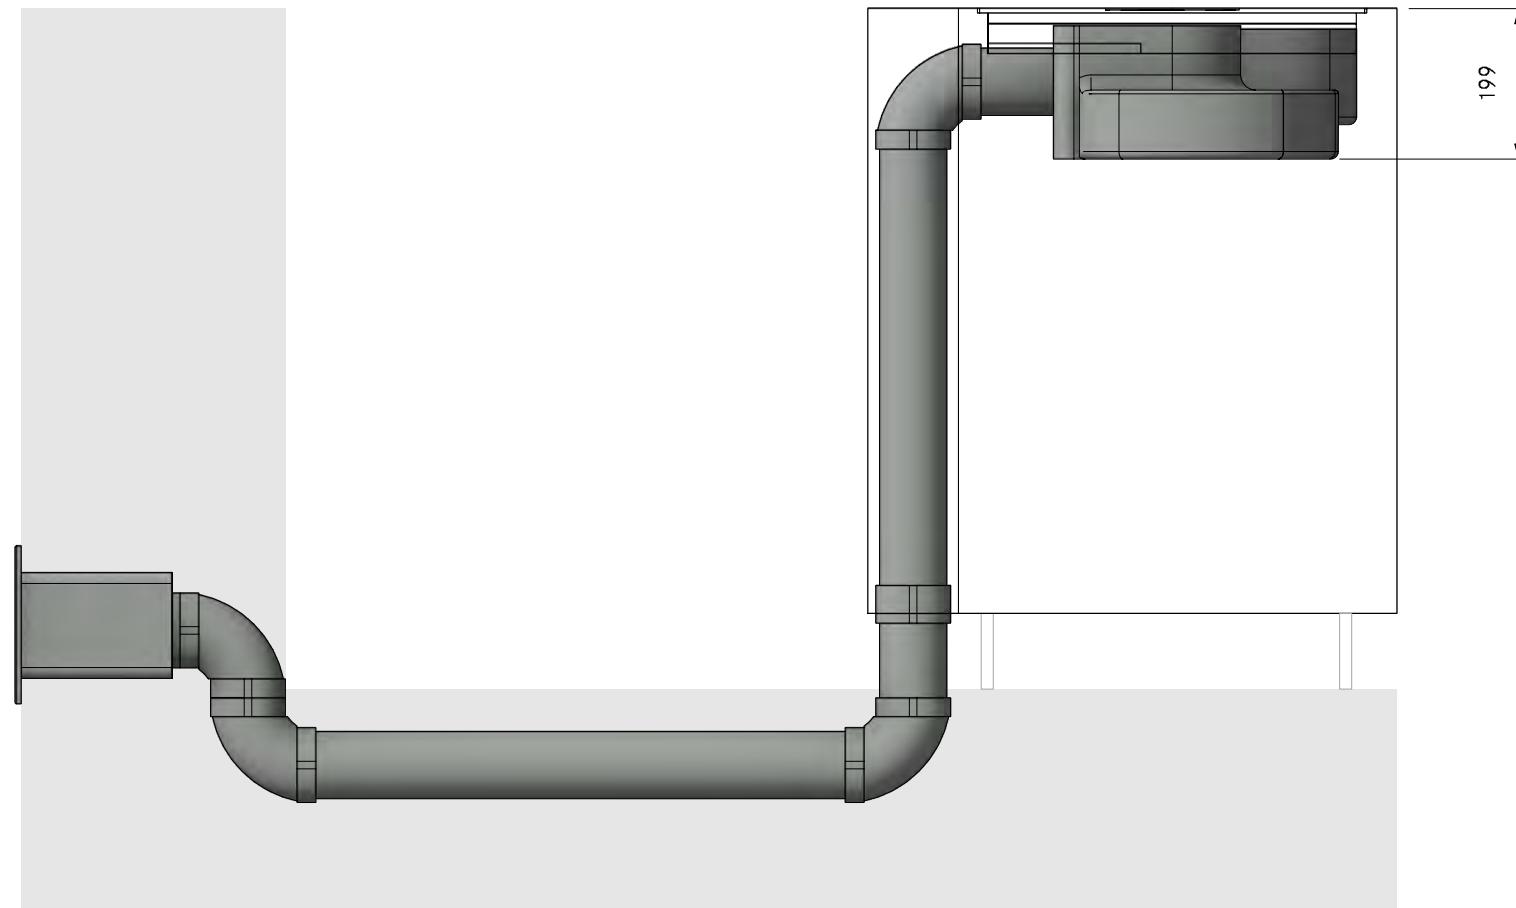

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30130  
(X/M)Pure Floor back swan neck UEBF


Version, 1.0

**BORA**

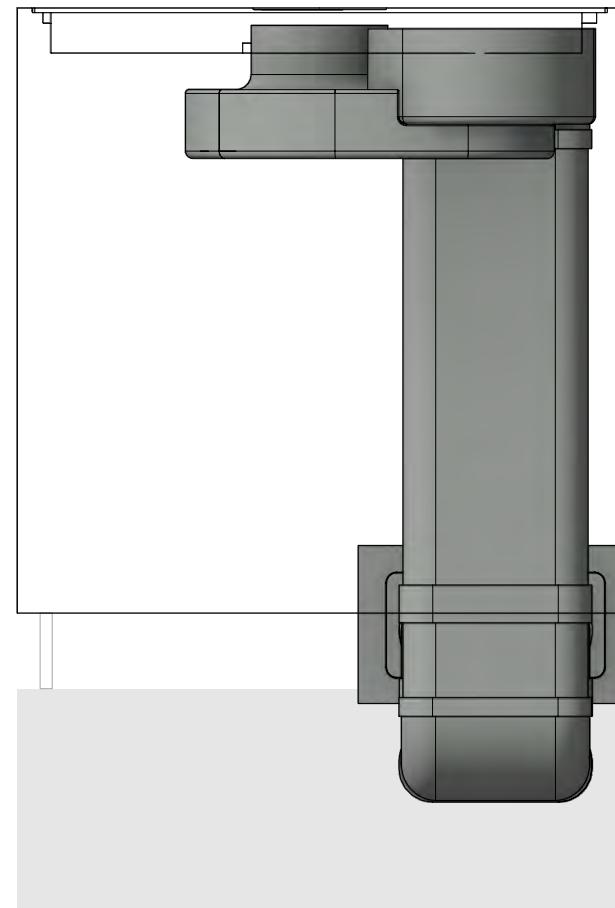

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

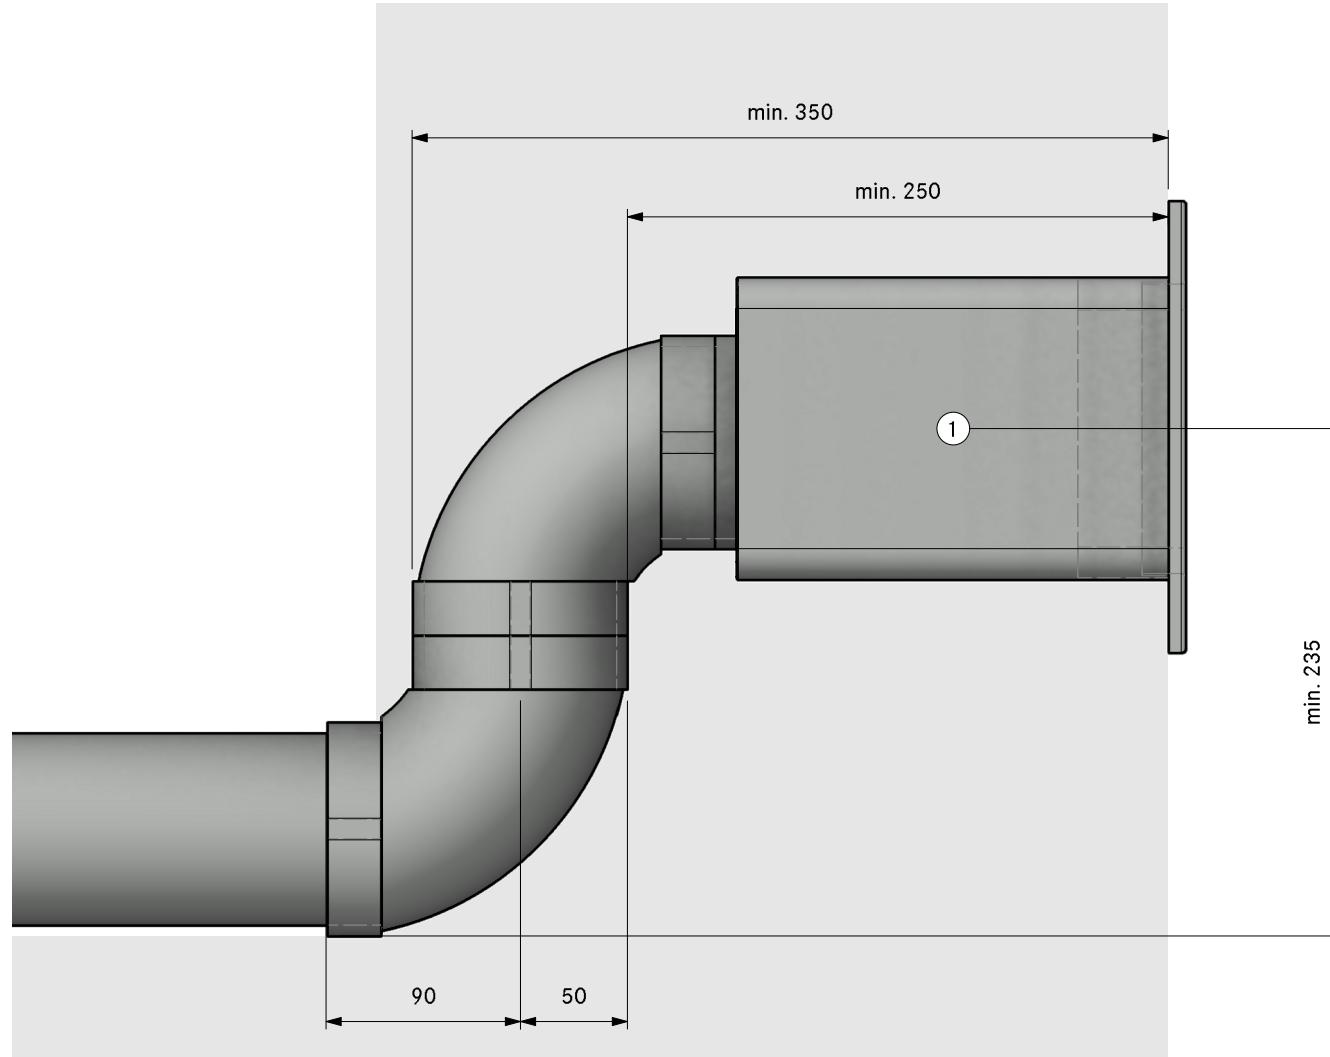


1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30140  
(X/M)Pure Floor back swan neck UEBR  
3D HK

PURA / PURMA / PUXA

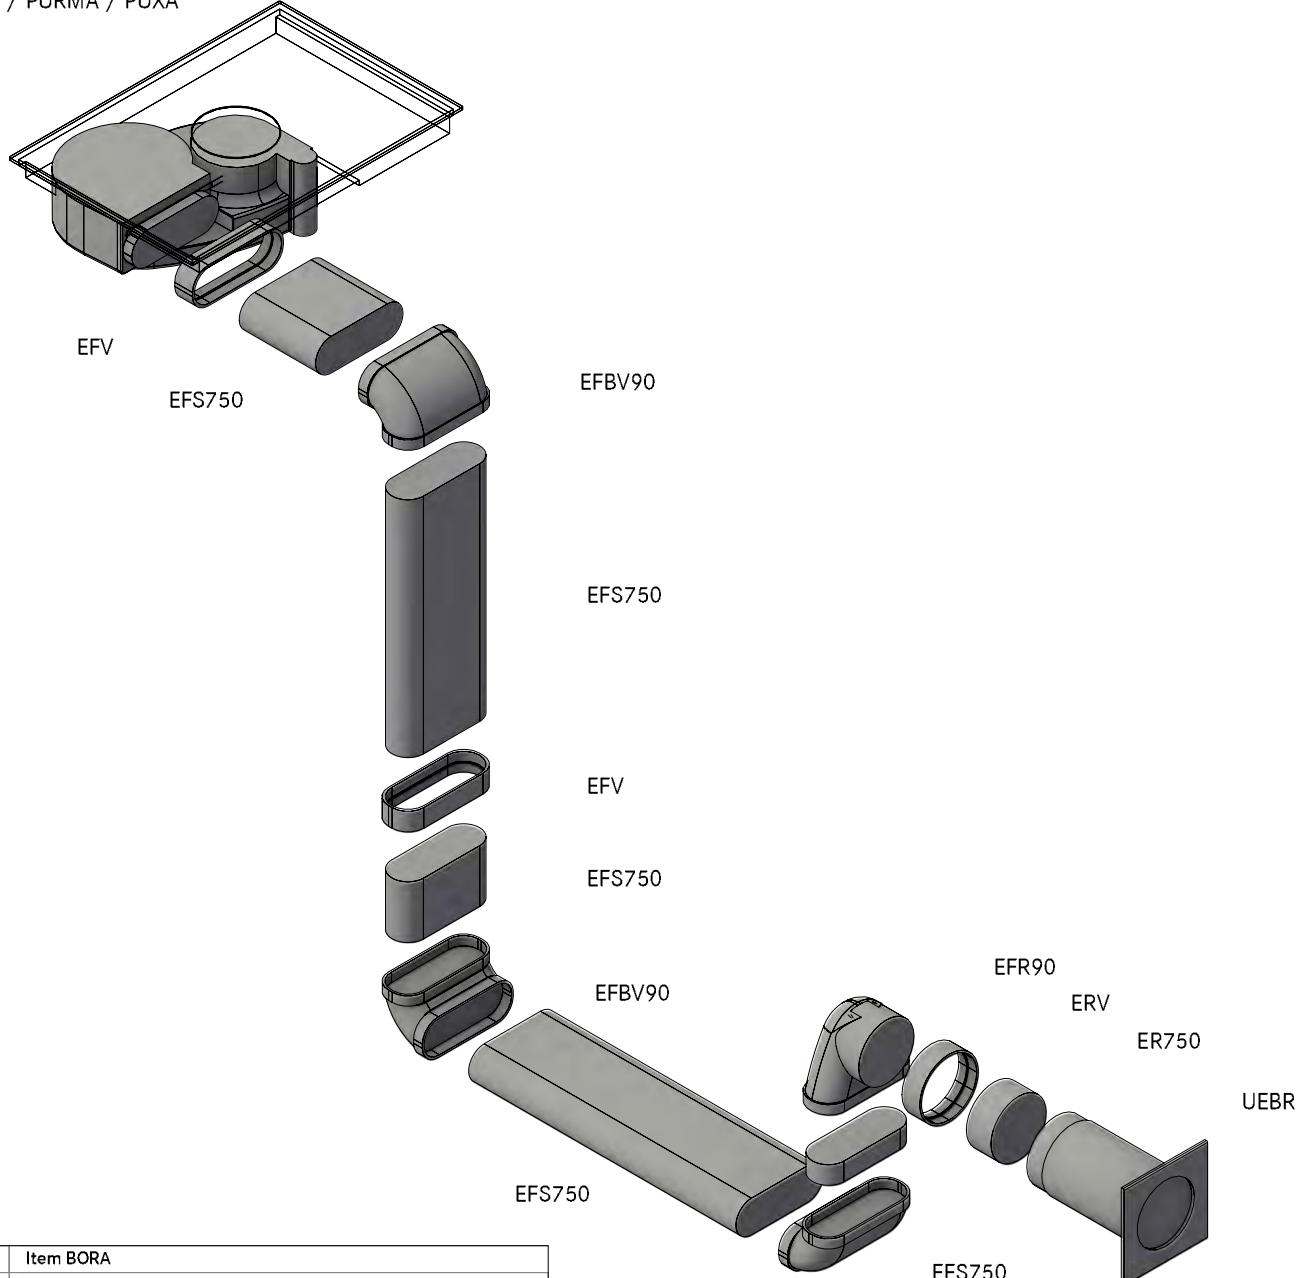



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30140  
(X/M)Pure Floor back swan neck UEBR  
GR HK

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

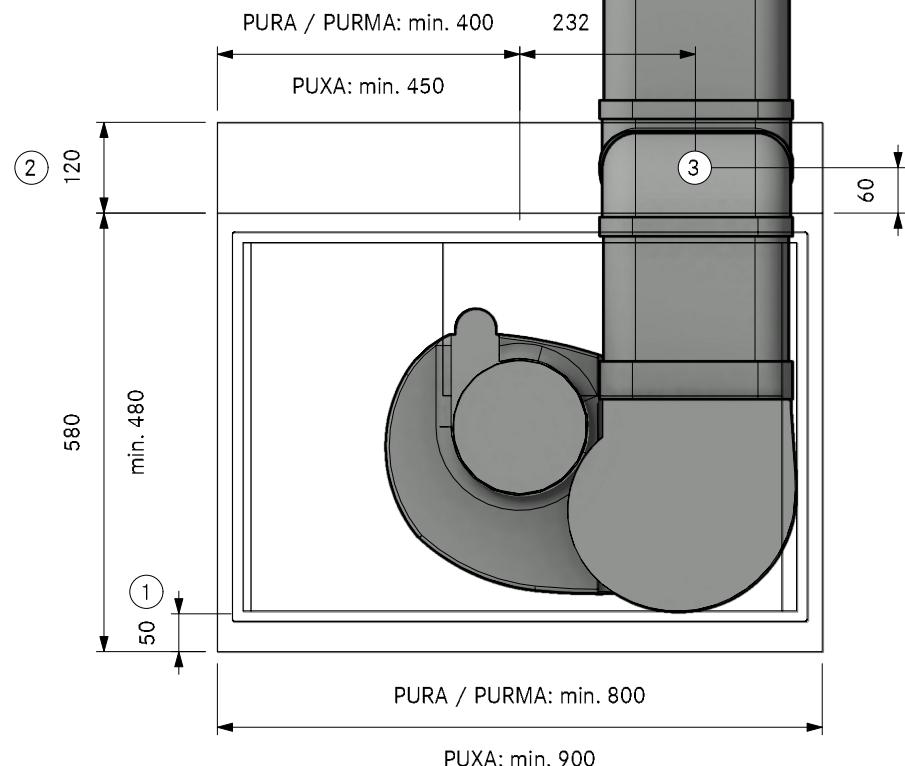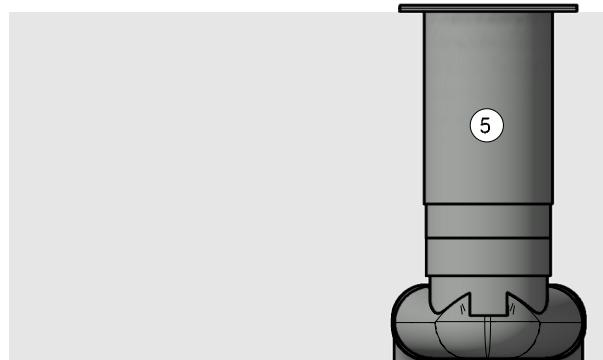


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30140  
(X/M)Pure Floor back swan neck UEBR

Version, 1.0

**BORA**

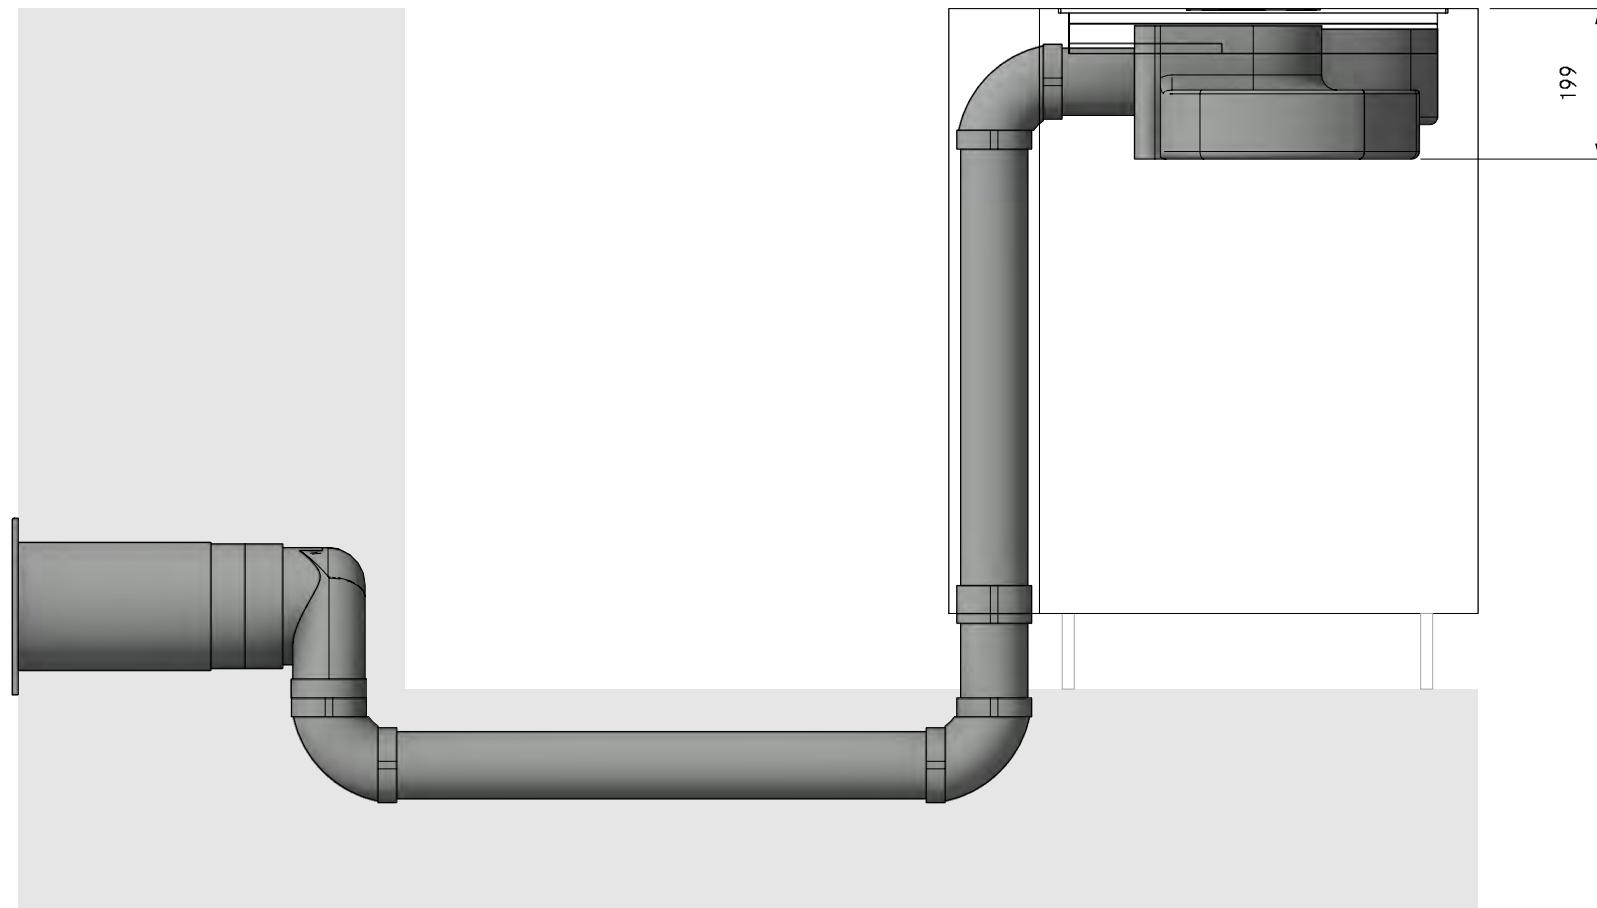


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30140  
(X/M)Pure Floor back swan neck UEBR


Version, 1.0

**BORA**

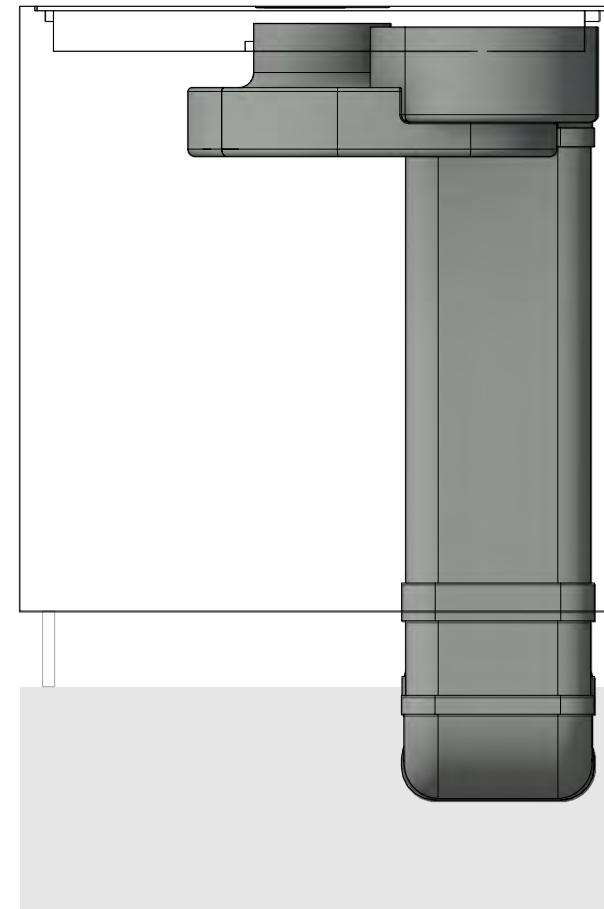

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

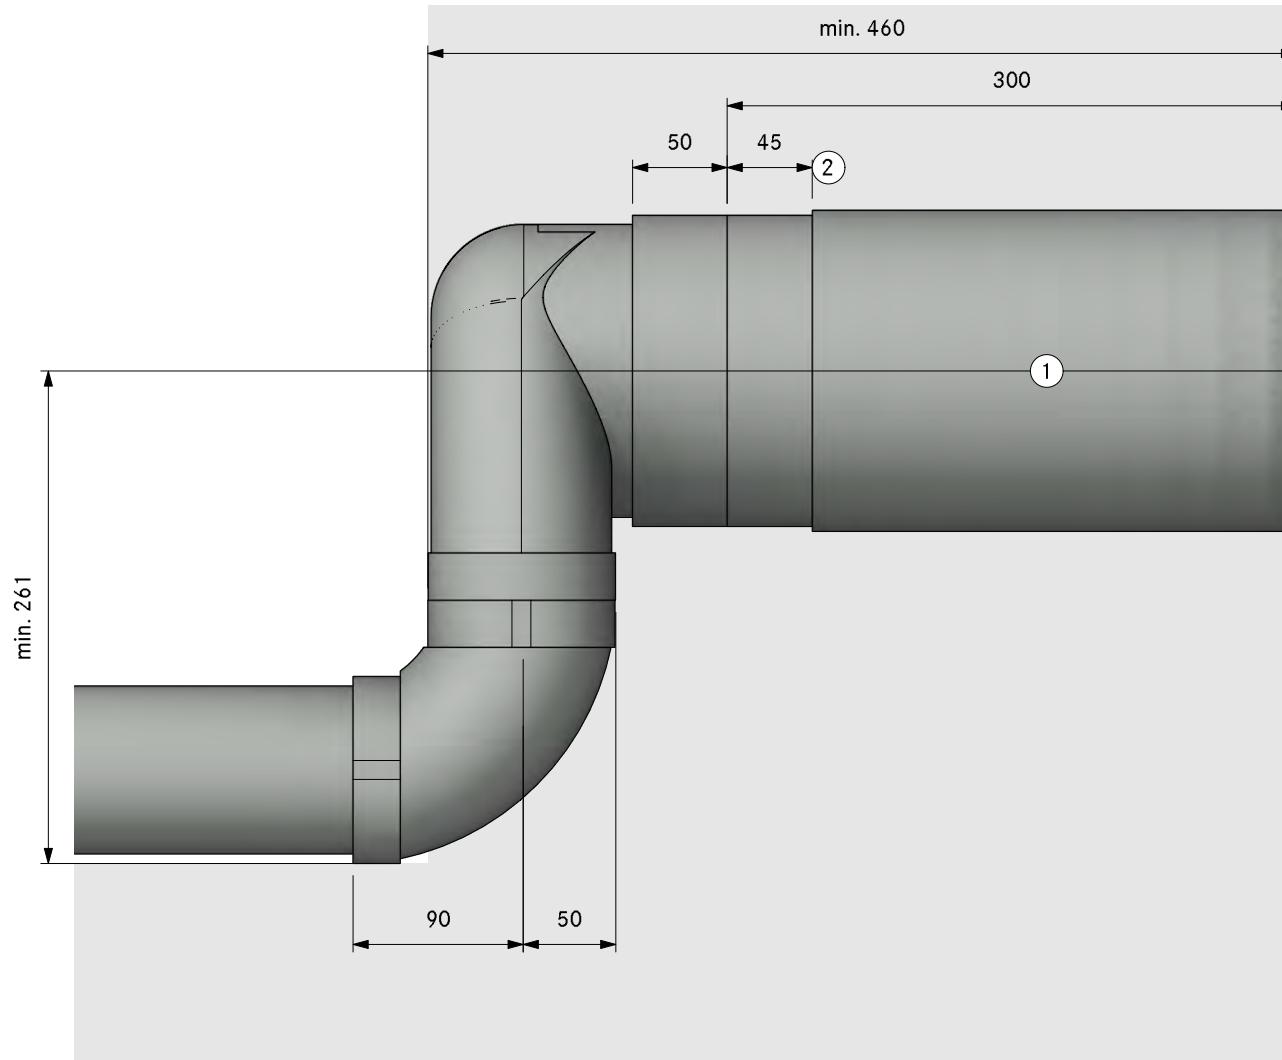



1. Hole size min. Ø 180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

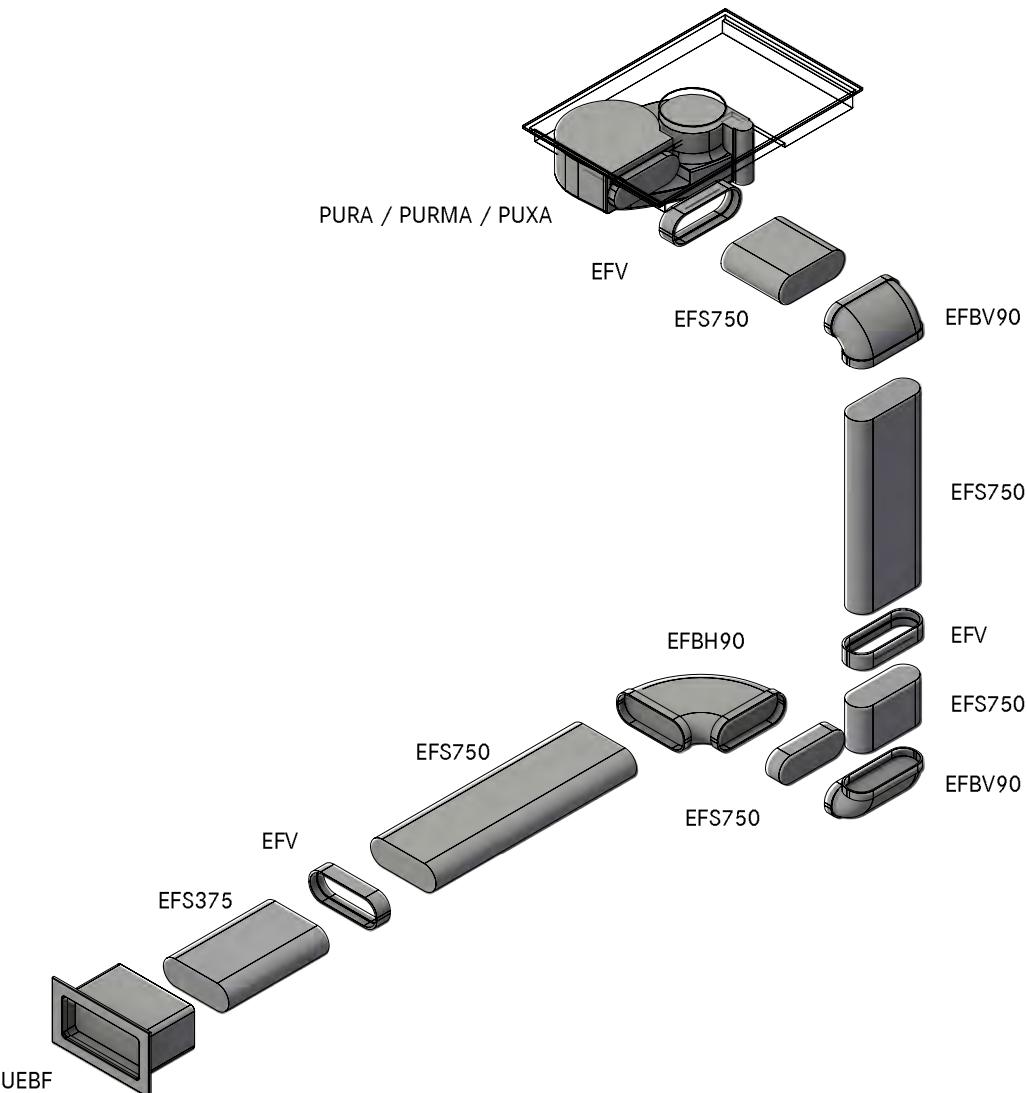

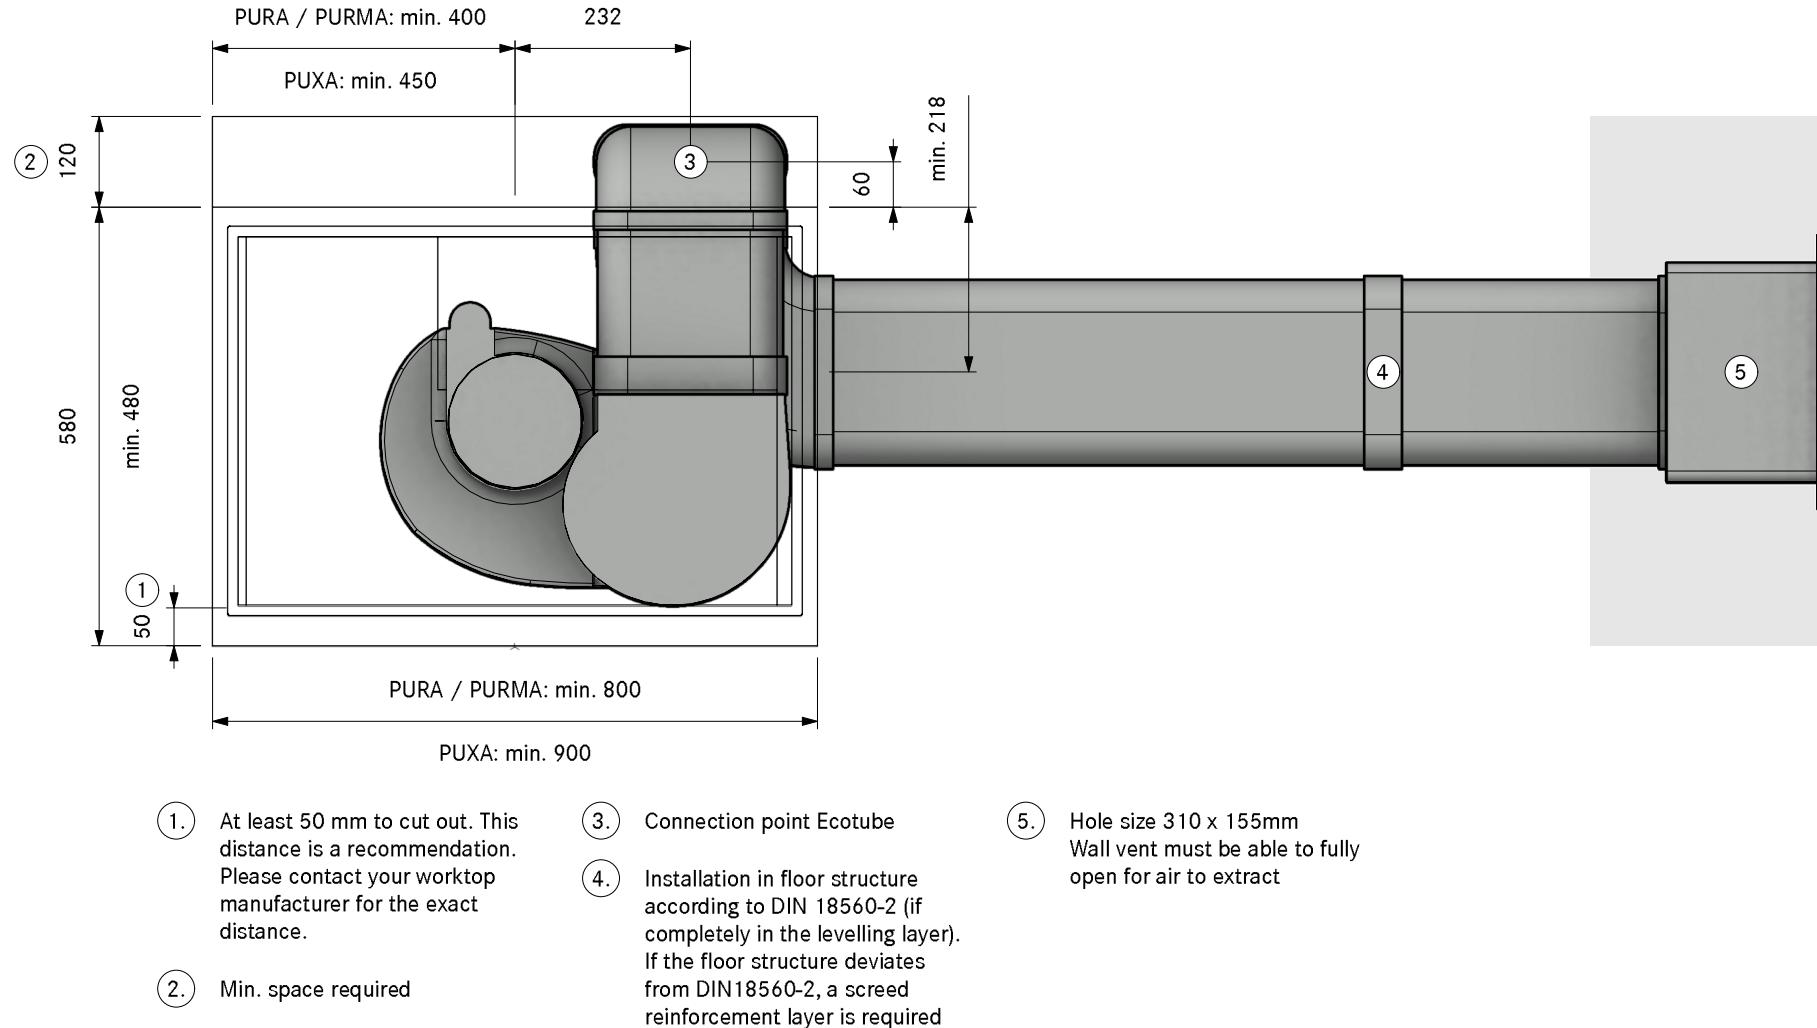


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30210  
(X/M)Pure Floor right UEBF

LAYOUT SA

Version, 1.0

**BORA**

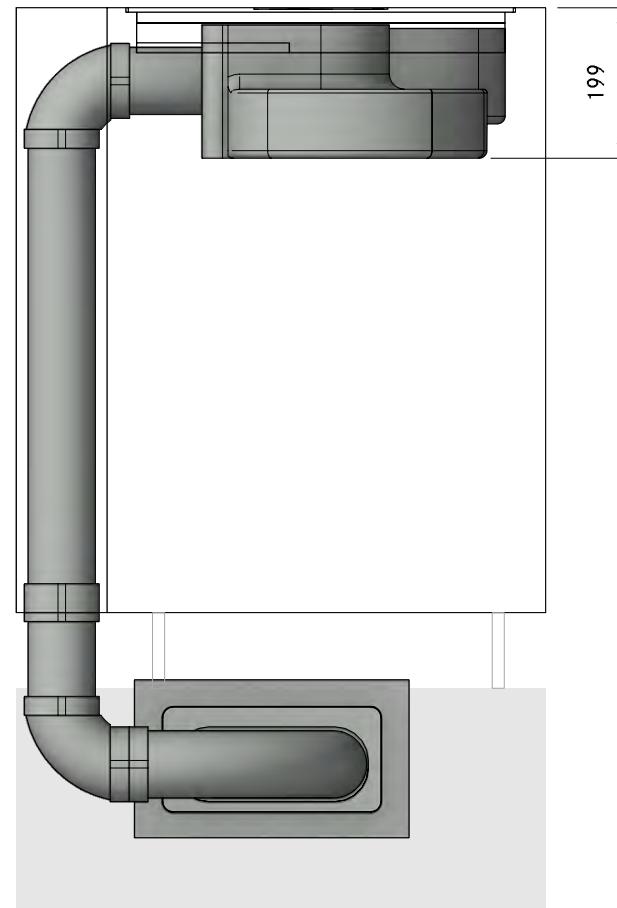

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30210  
(X/M)Pure Floor right UEBF

LAYOUT FA


Version, 1.0

**BORA**

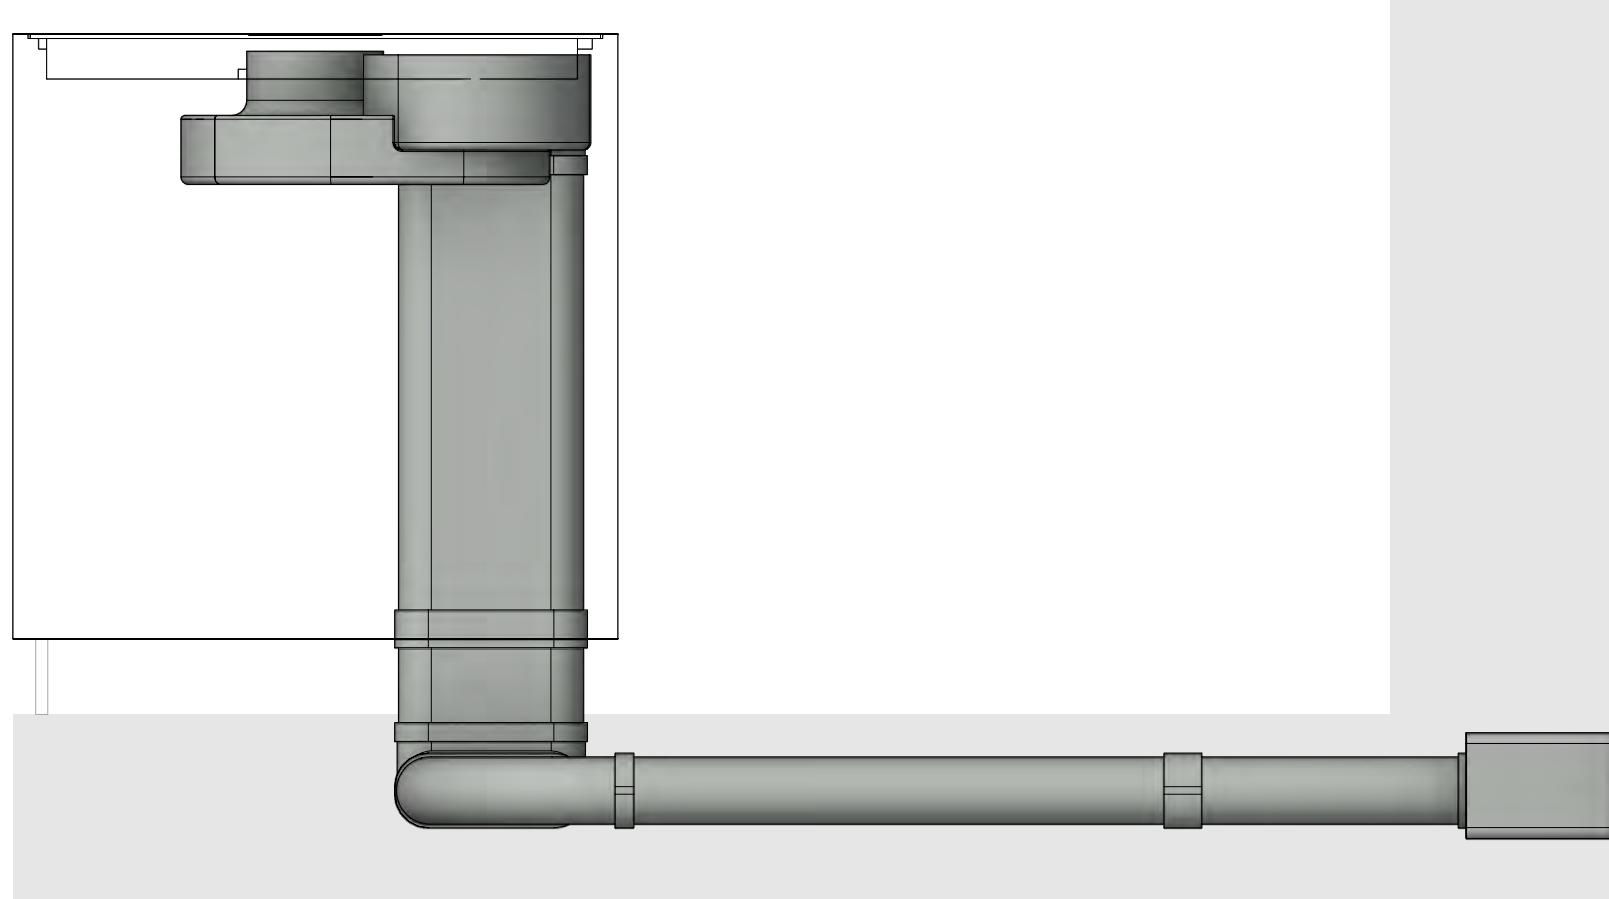

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

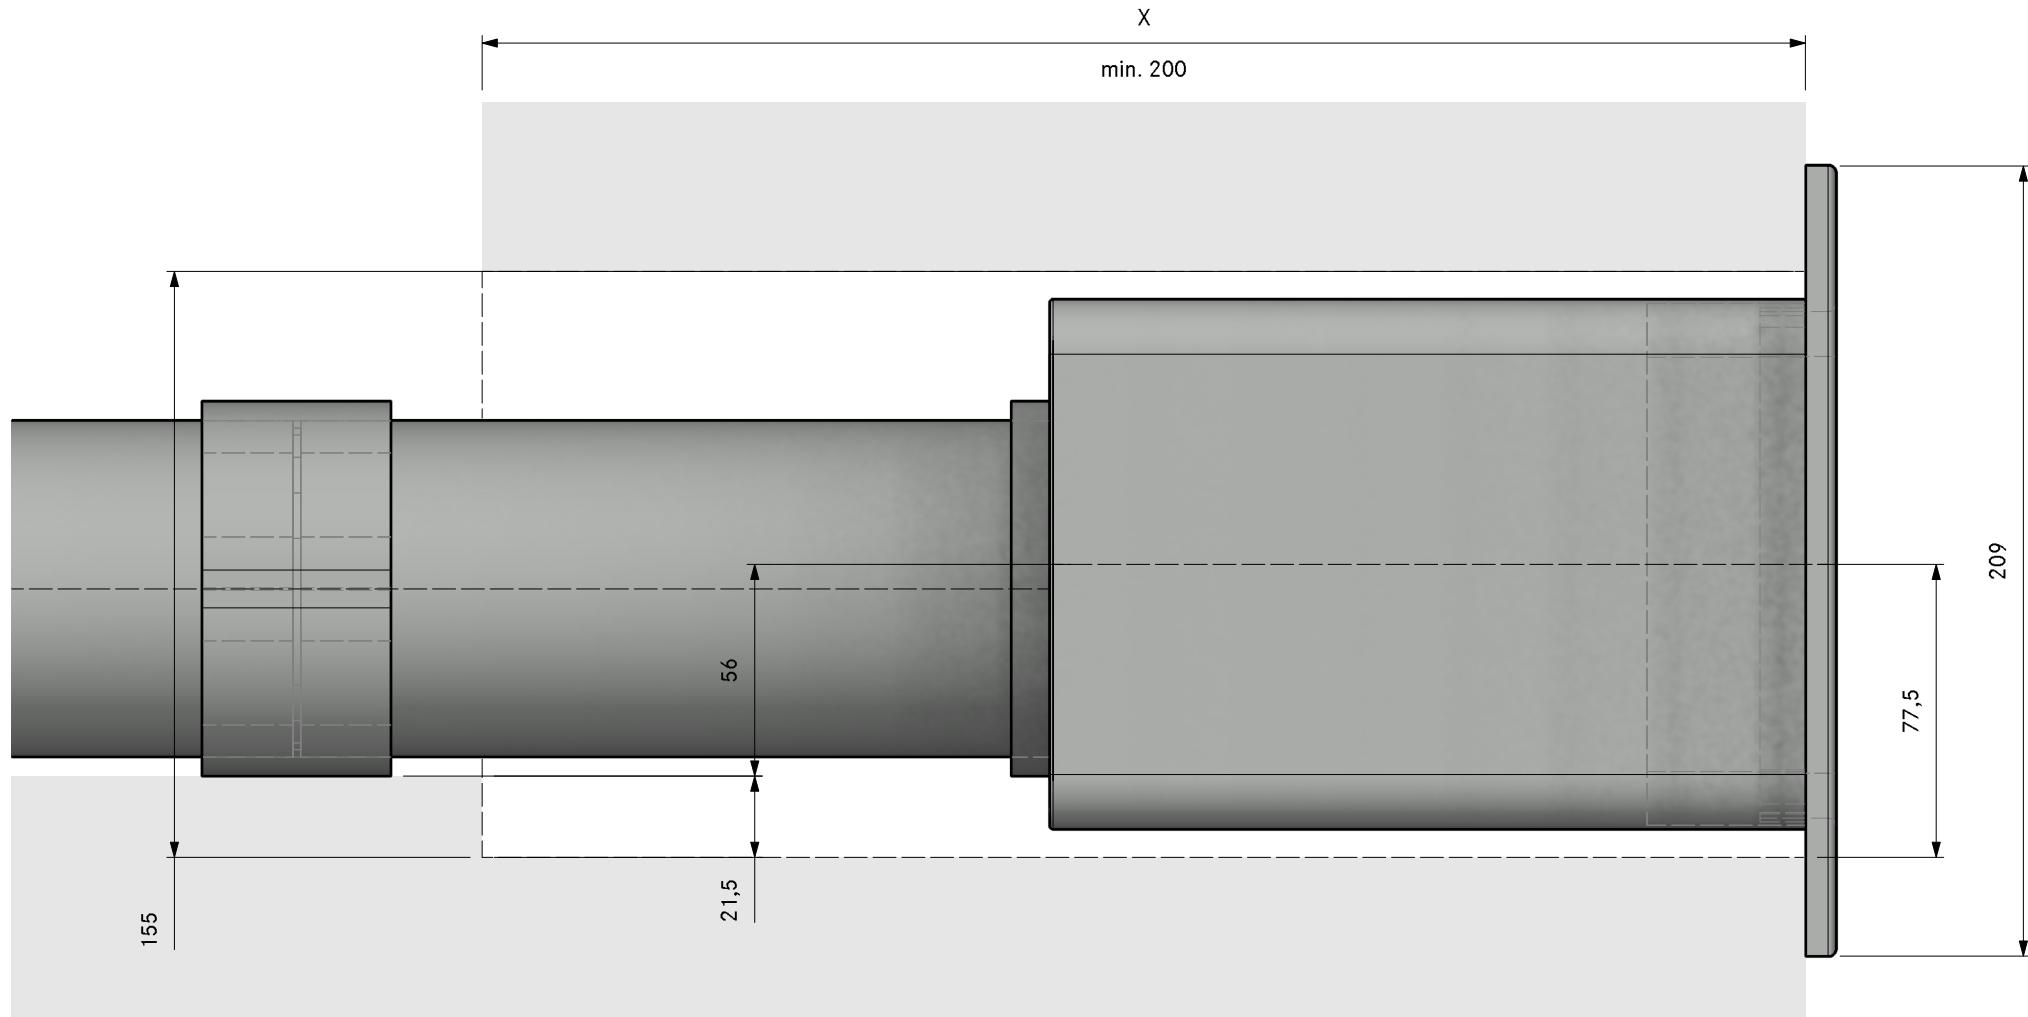




Count	Item BORA
1	PURA / Pure surface-/inductions cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
2	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

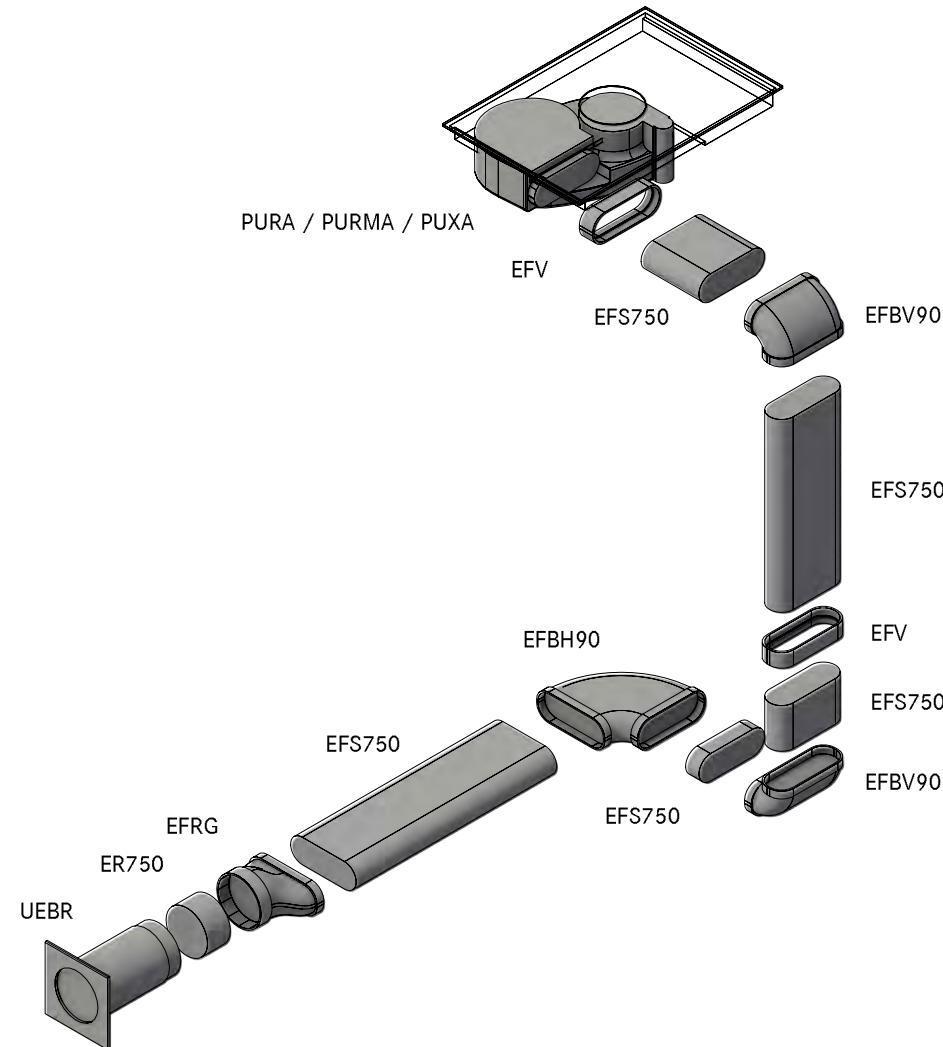

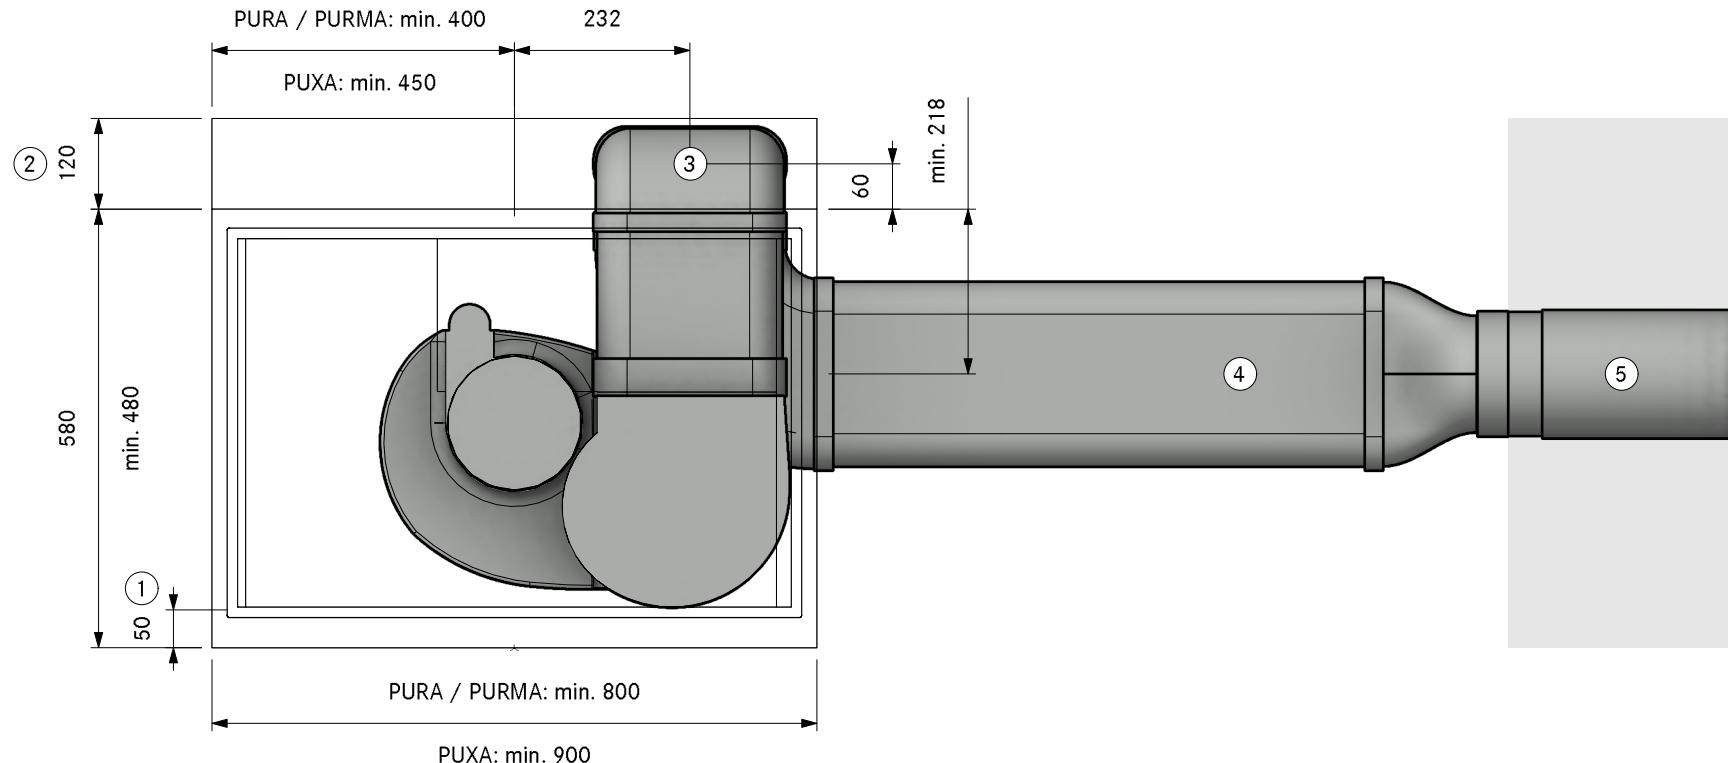

- At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- Min. space required
- Connection point Ecotube
- Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30220  
(X/M)Pure Floor right UEBR

LAYOUT SA

Version, 1.0

**BORA**

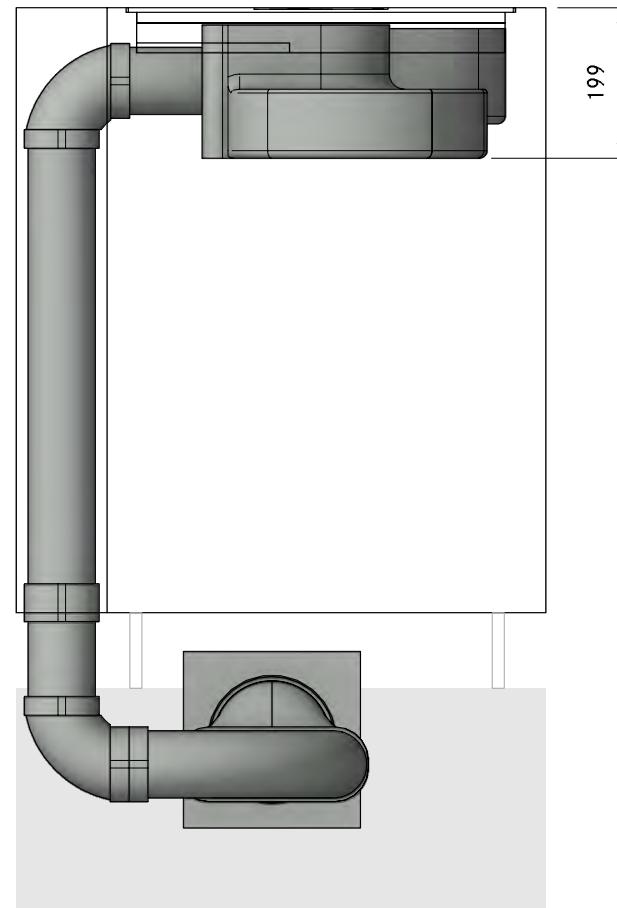

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30220  
(X/M)Pure Floor right UEBR

LAYOUT FA

Version, 1.0

**BORA**

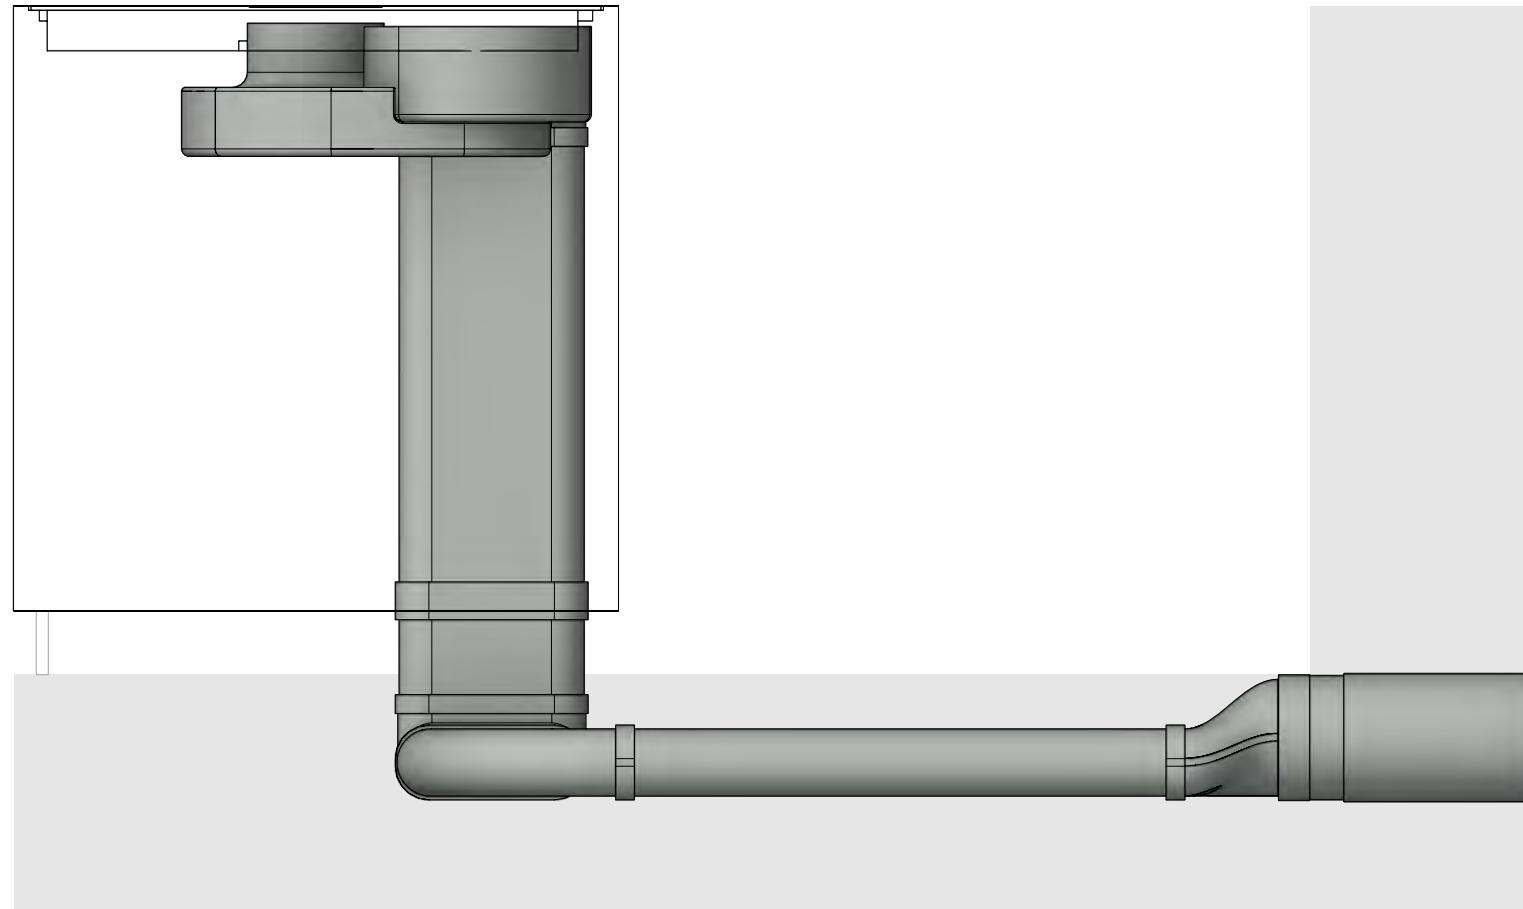


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

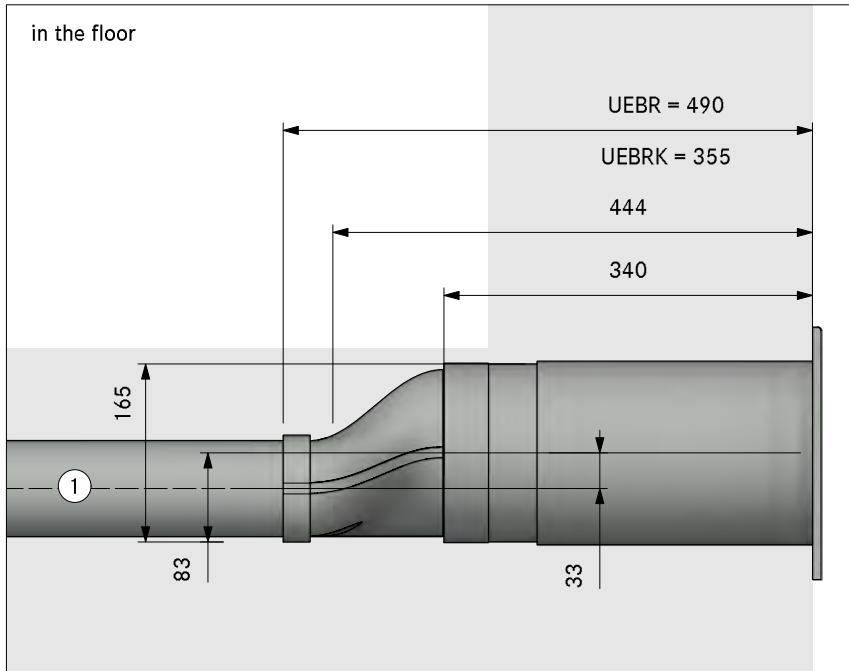

in the plinth area

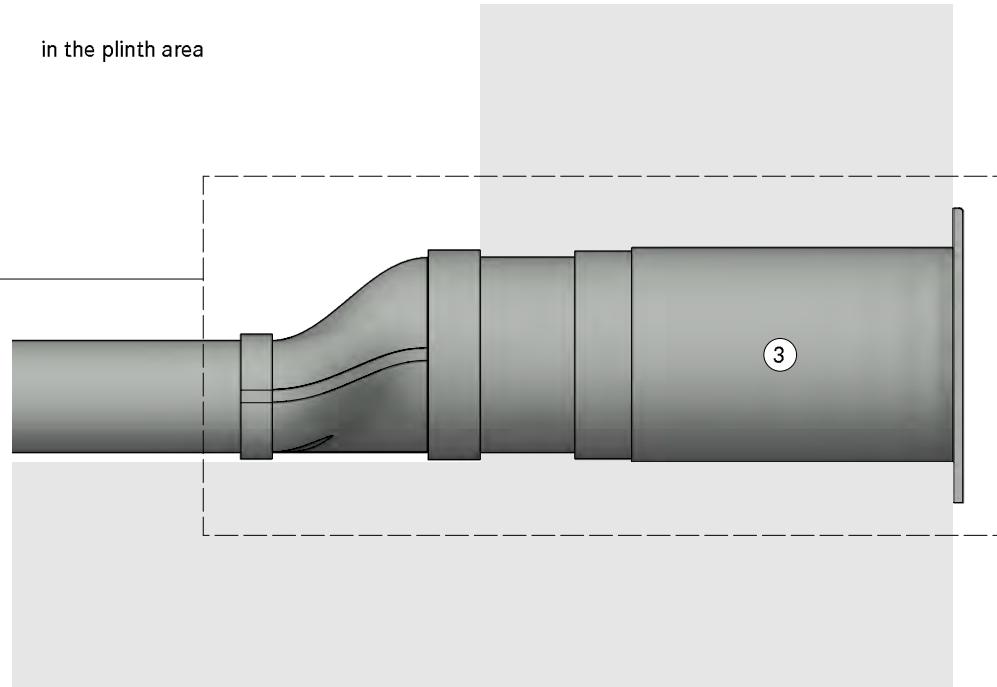


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

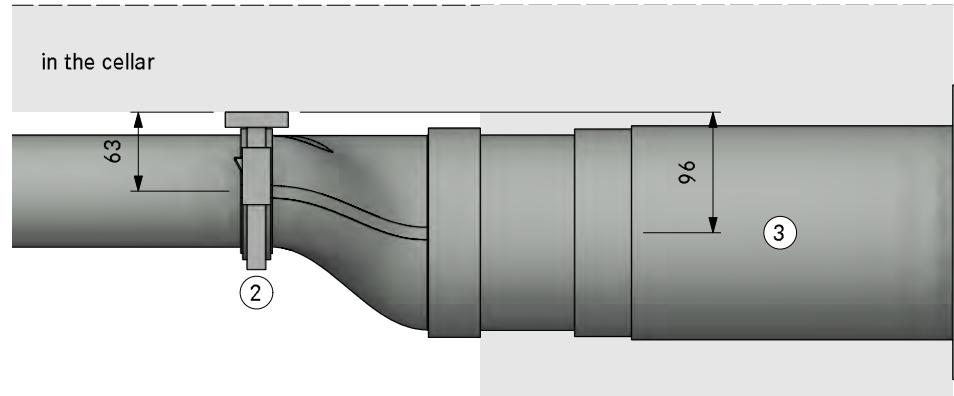




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
4	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed

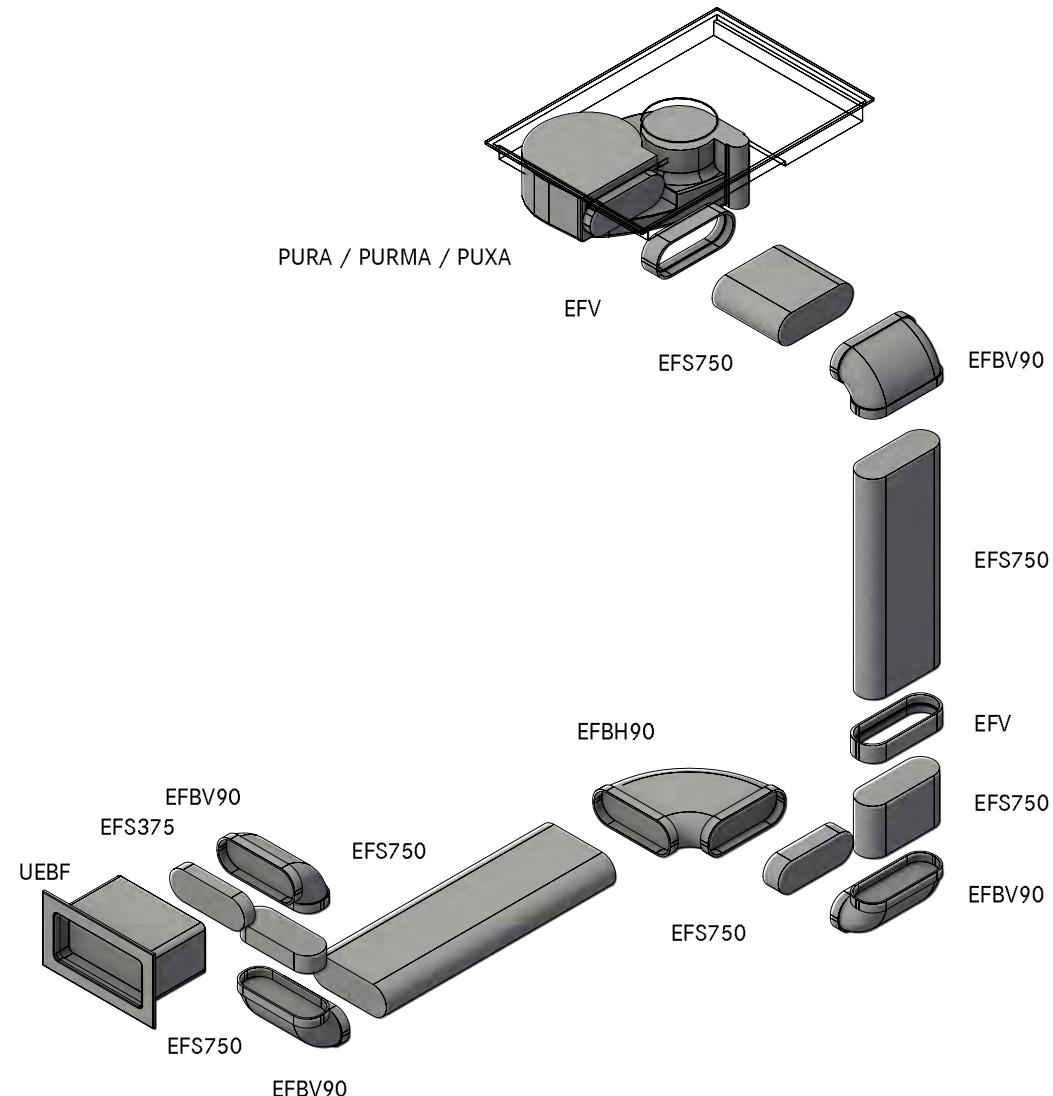

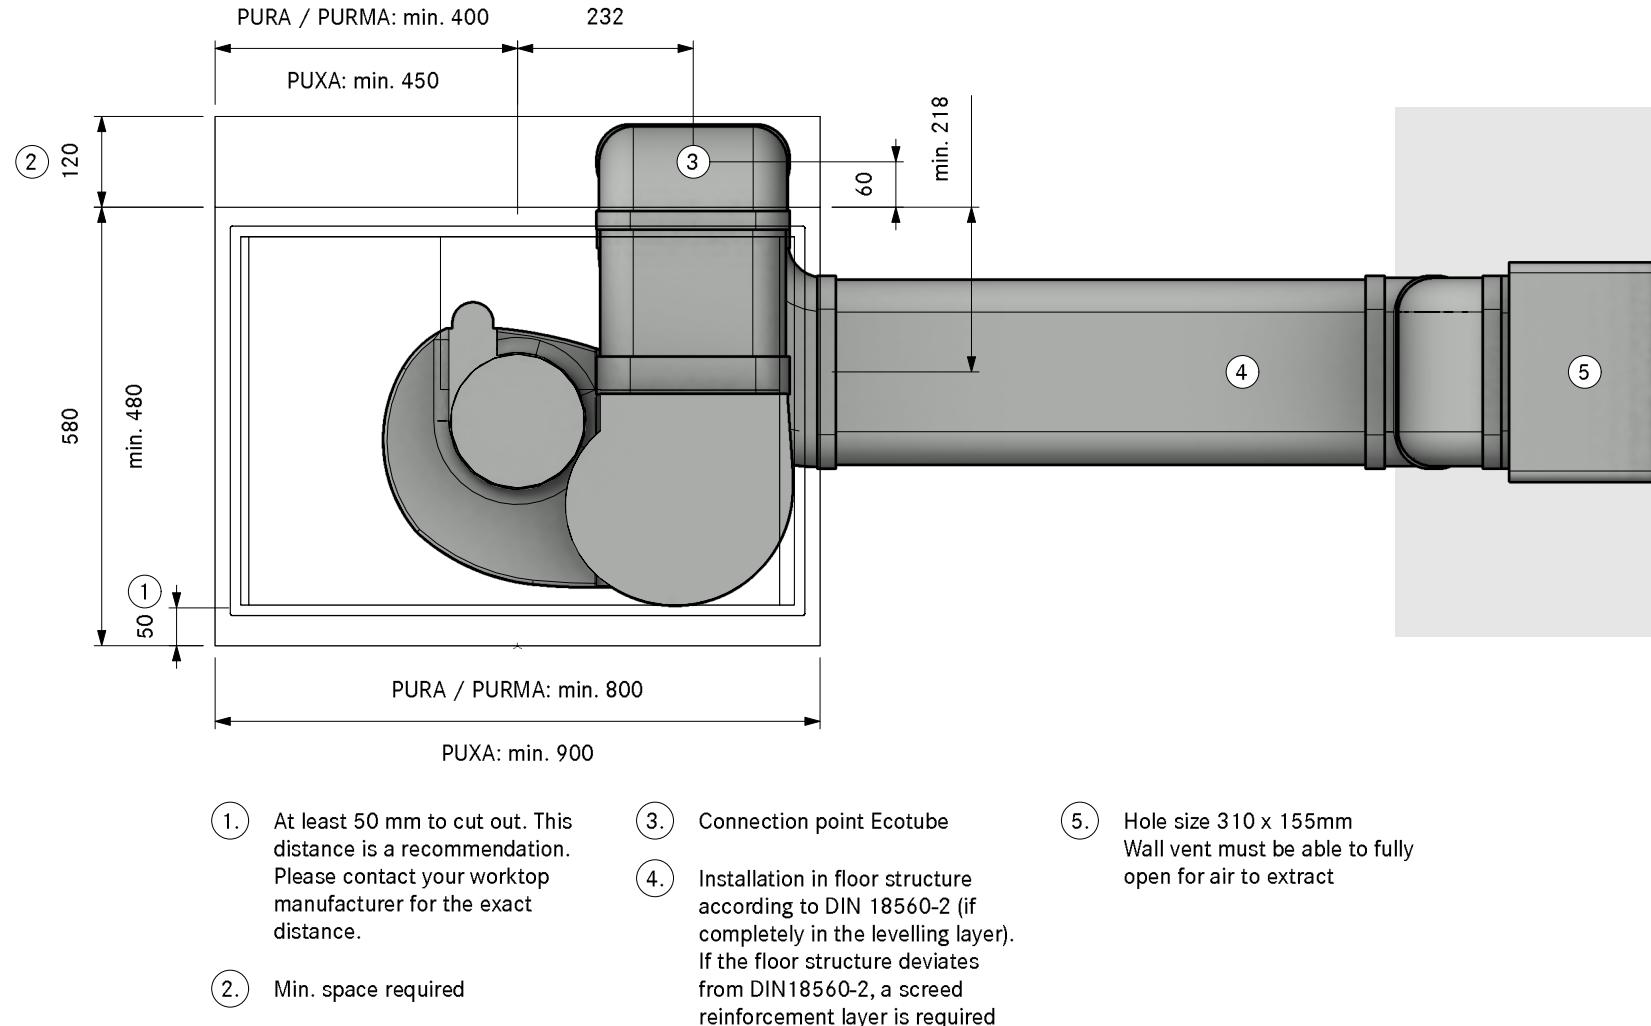


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30230  
(X/M)Pure Floor right swan neck UEBF  
SA

Version, 1.0

**BORA**

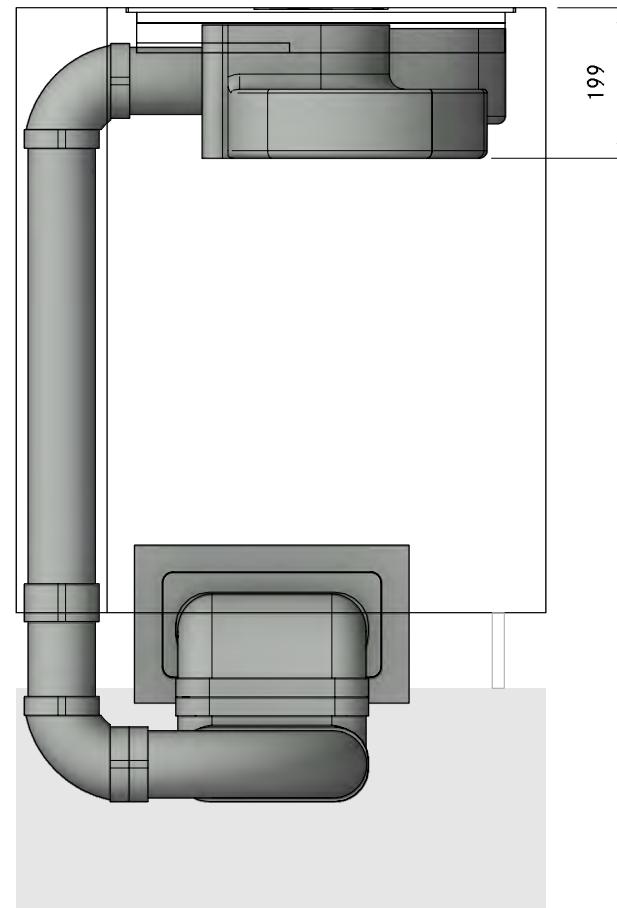

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA30230  
(X/M)Pure Floor right swan neck UEBF

LAYOUT

FA


Version, 1.0

**BORA**

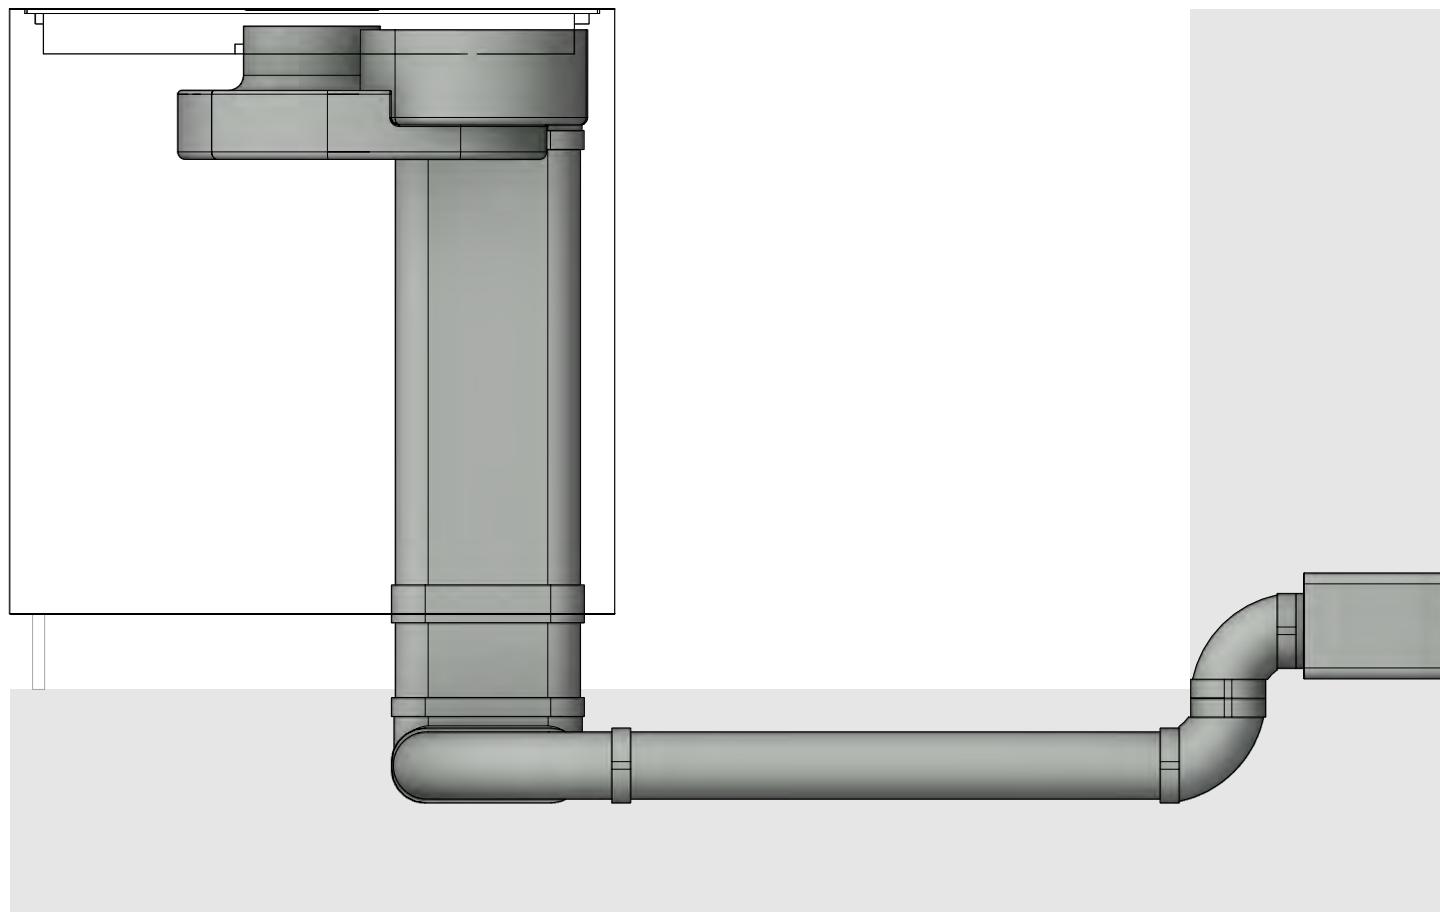

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

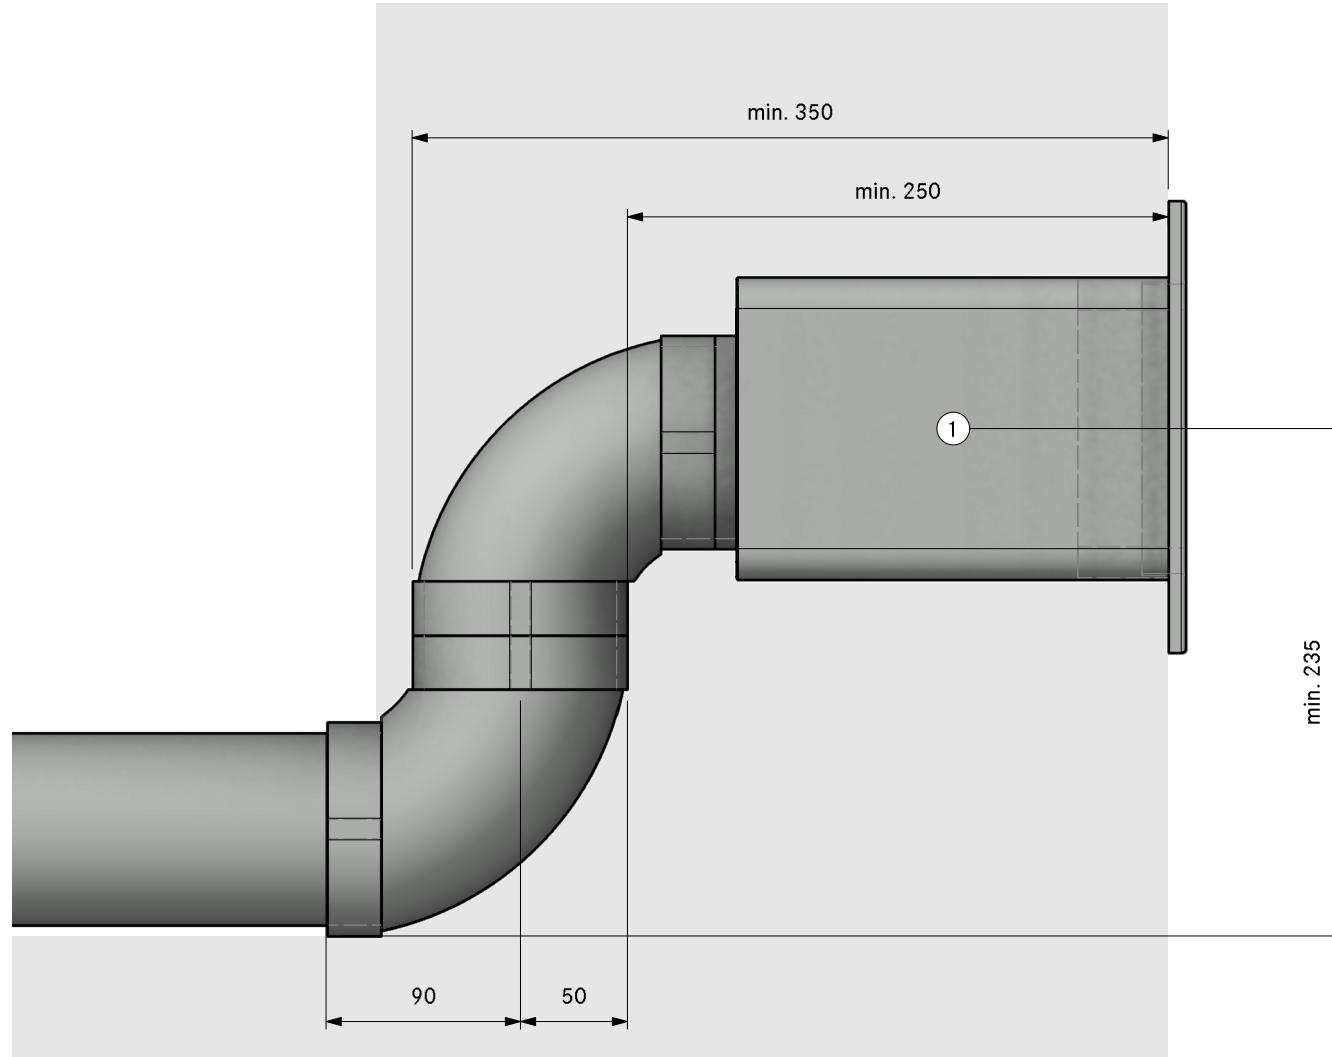

1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30240  
(X/M)Pure Floor right swan neck UEBR


LAYOUT 3D

Version, 1.0

**BORA**


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

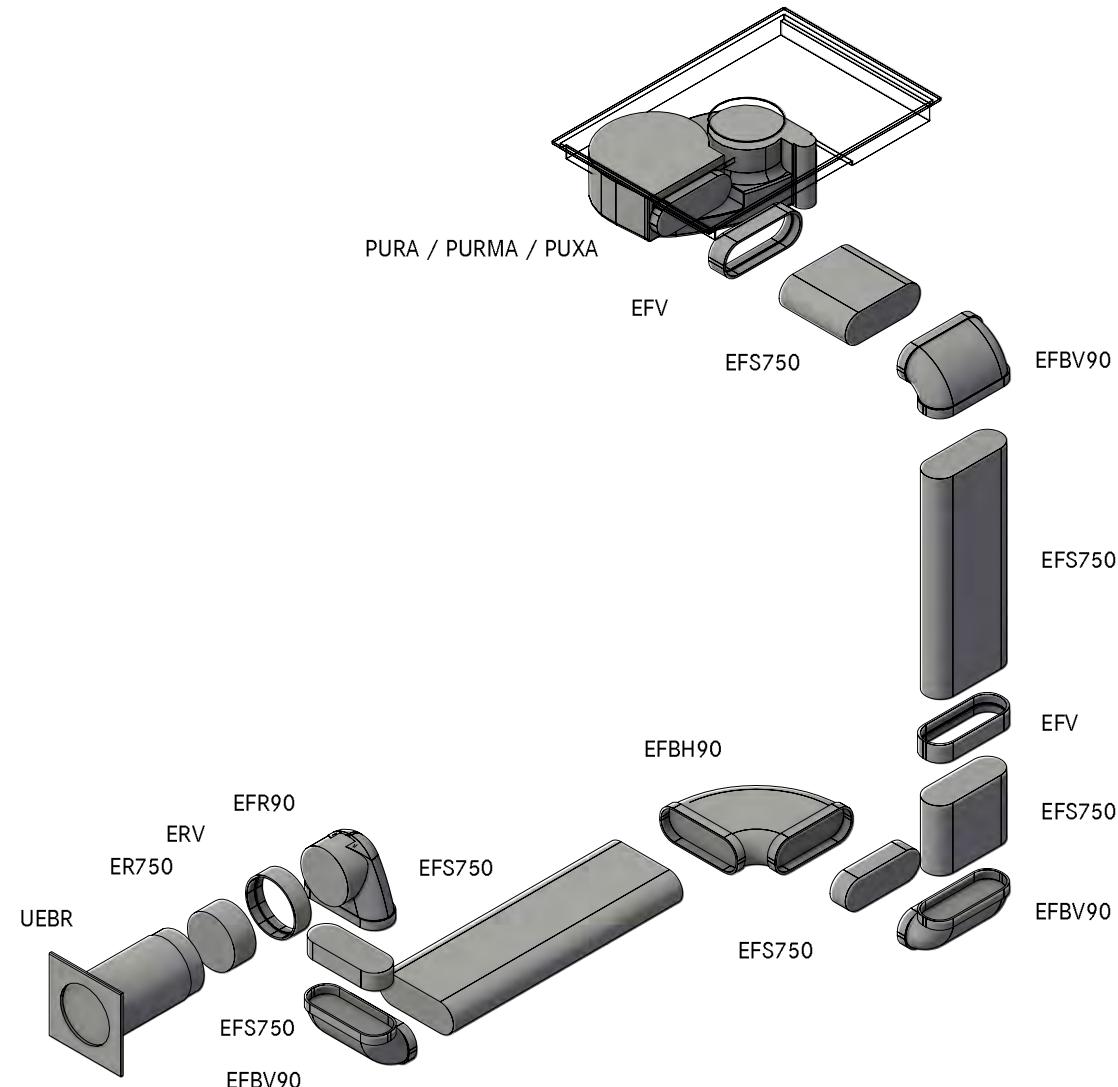

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

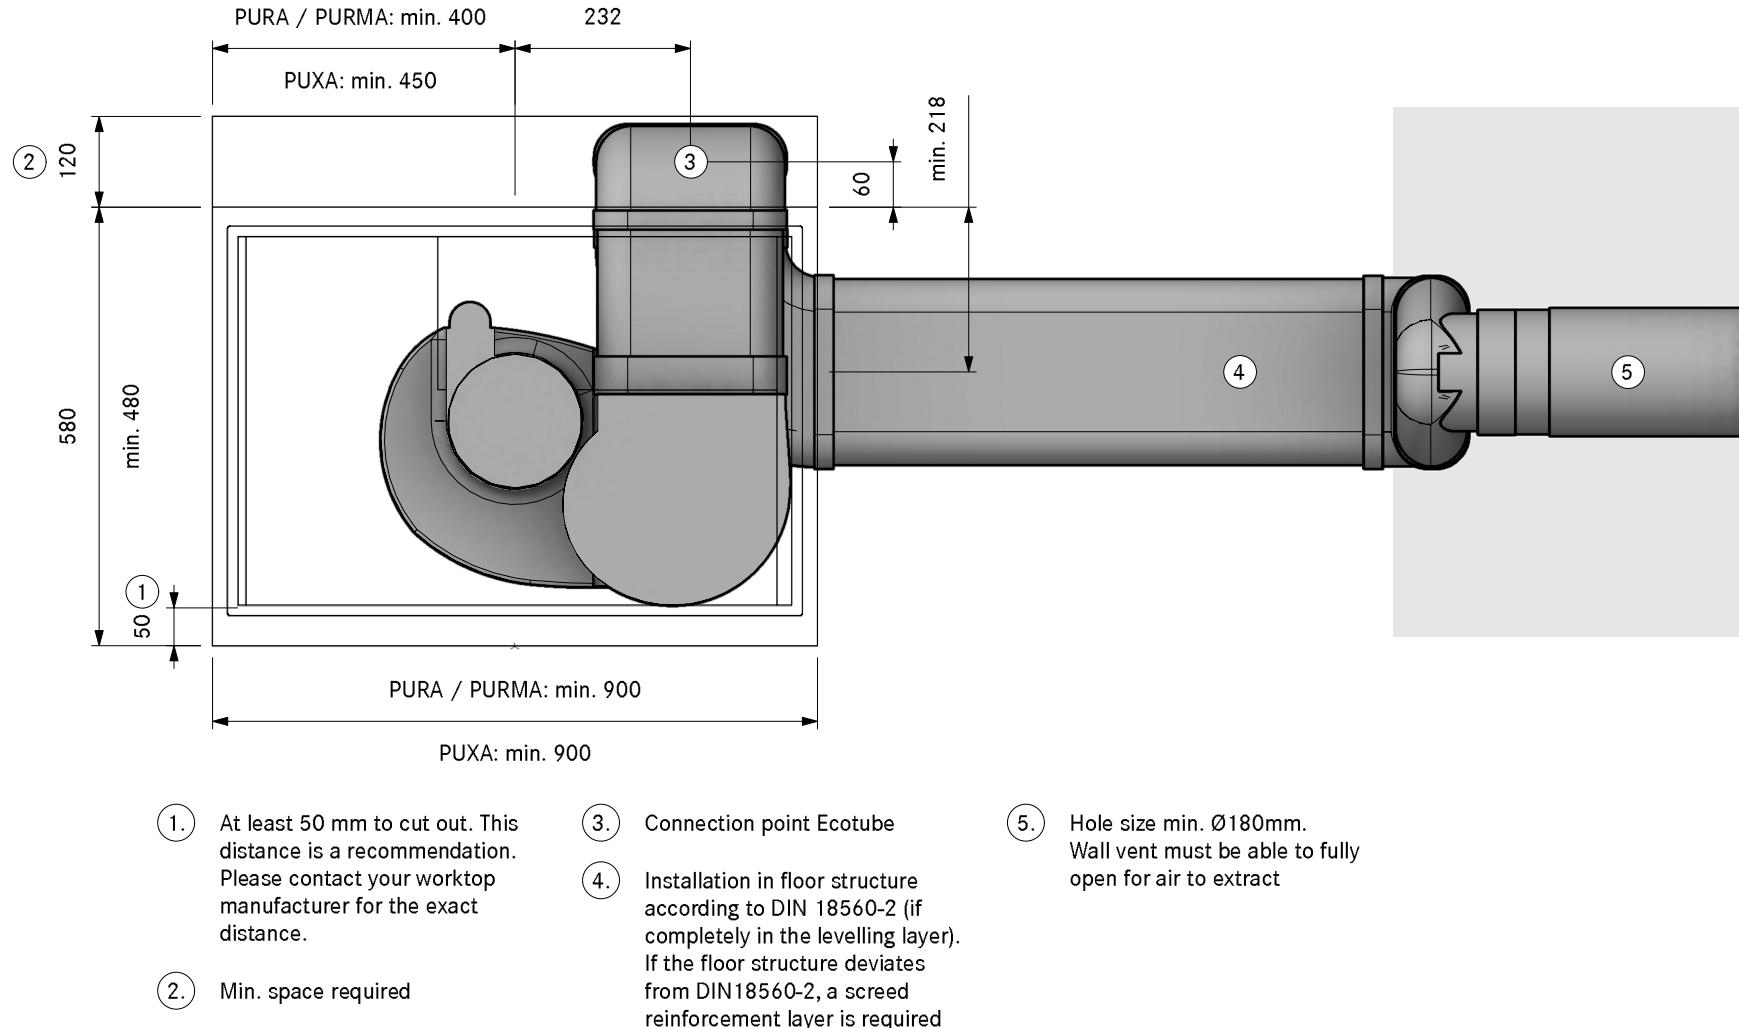


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30240  
(X/M)Pure Floor right swan neck UEBR  
SA

Version, 1.0

**BORA**

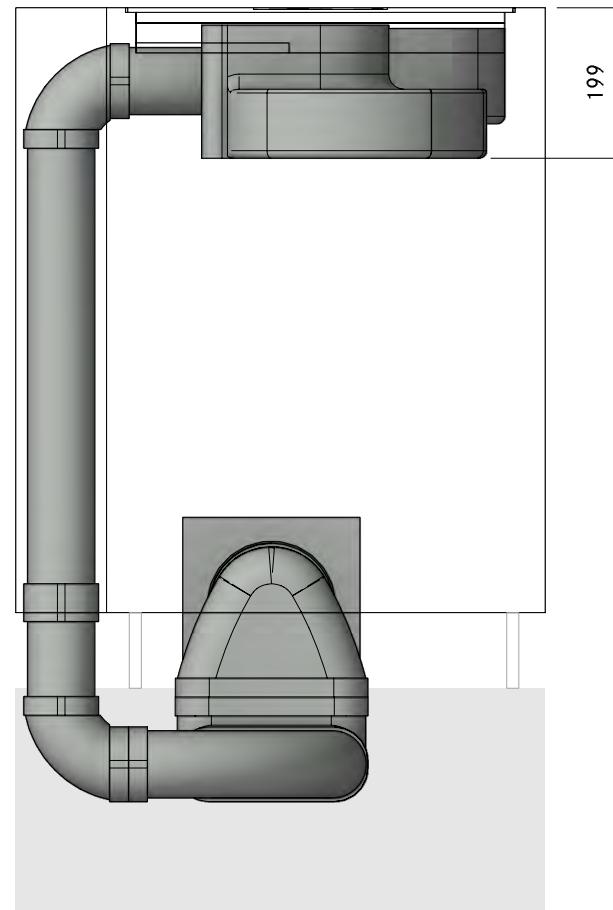

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA30240  
(X/M)Pure Floor right swan neck UEBR

LAYOUT

FA


Version, 1.0

**BORA**

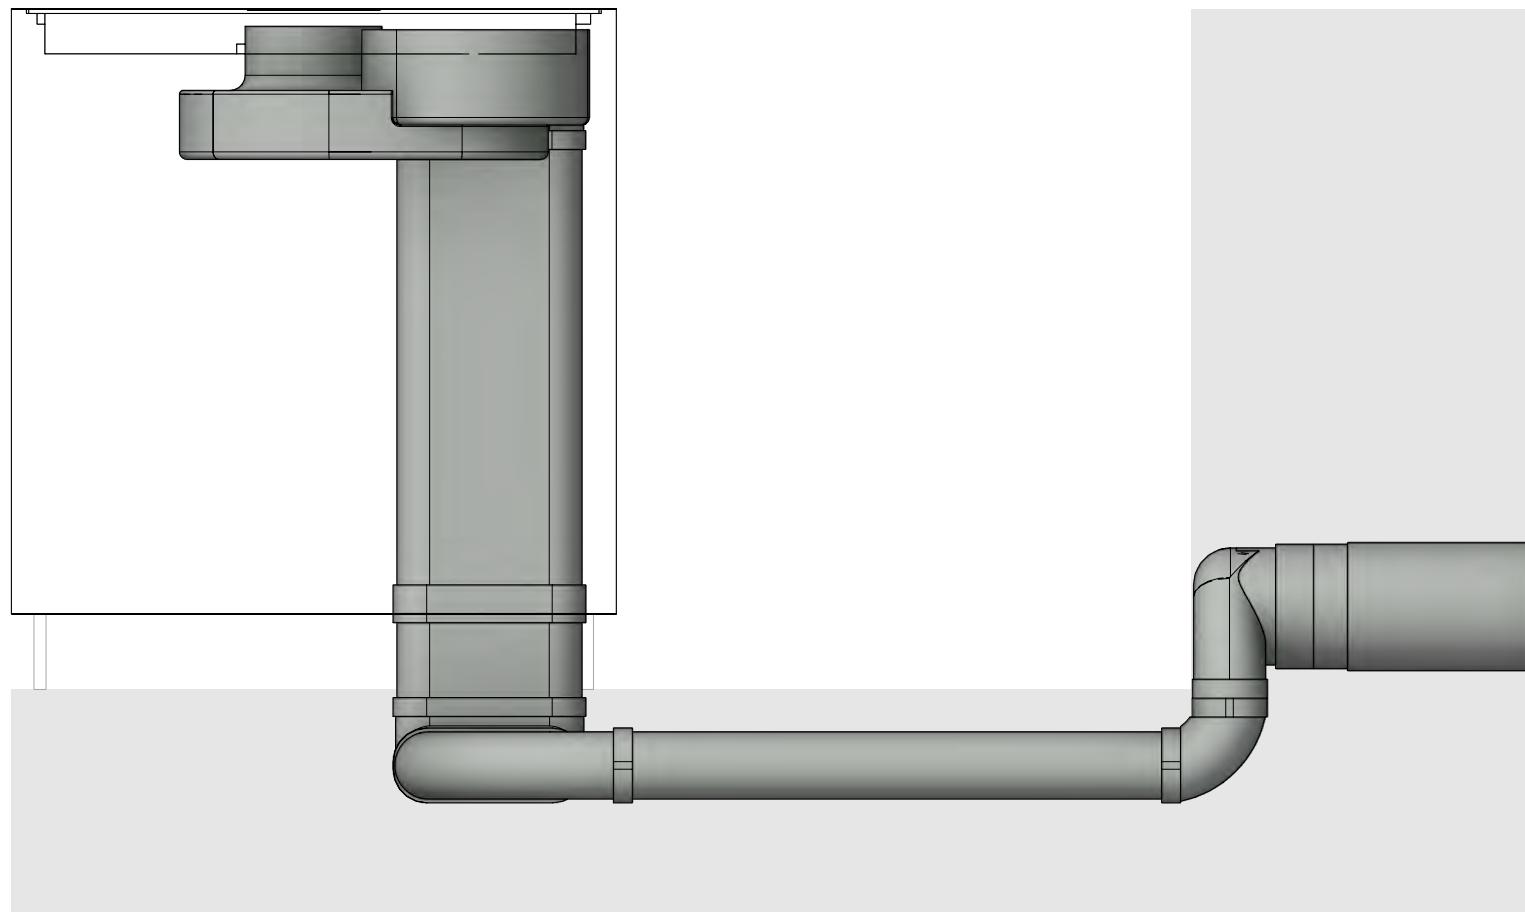

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

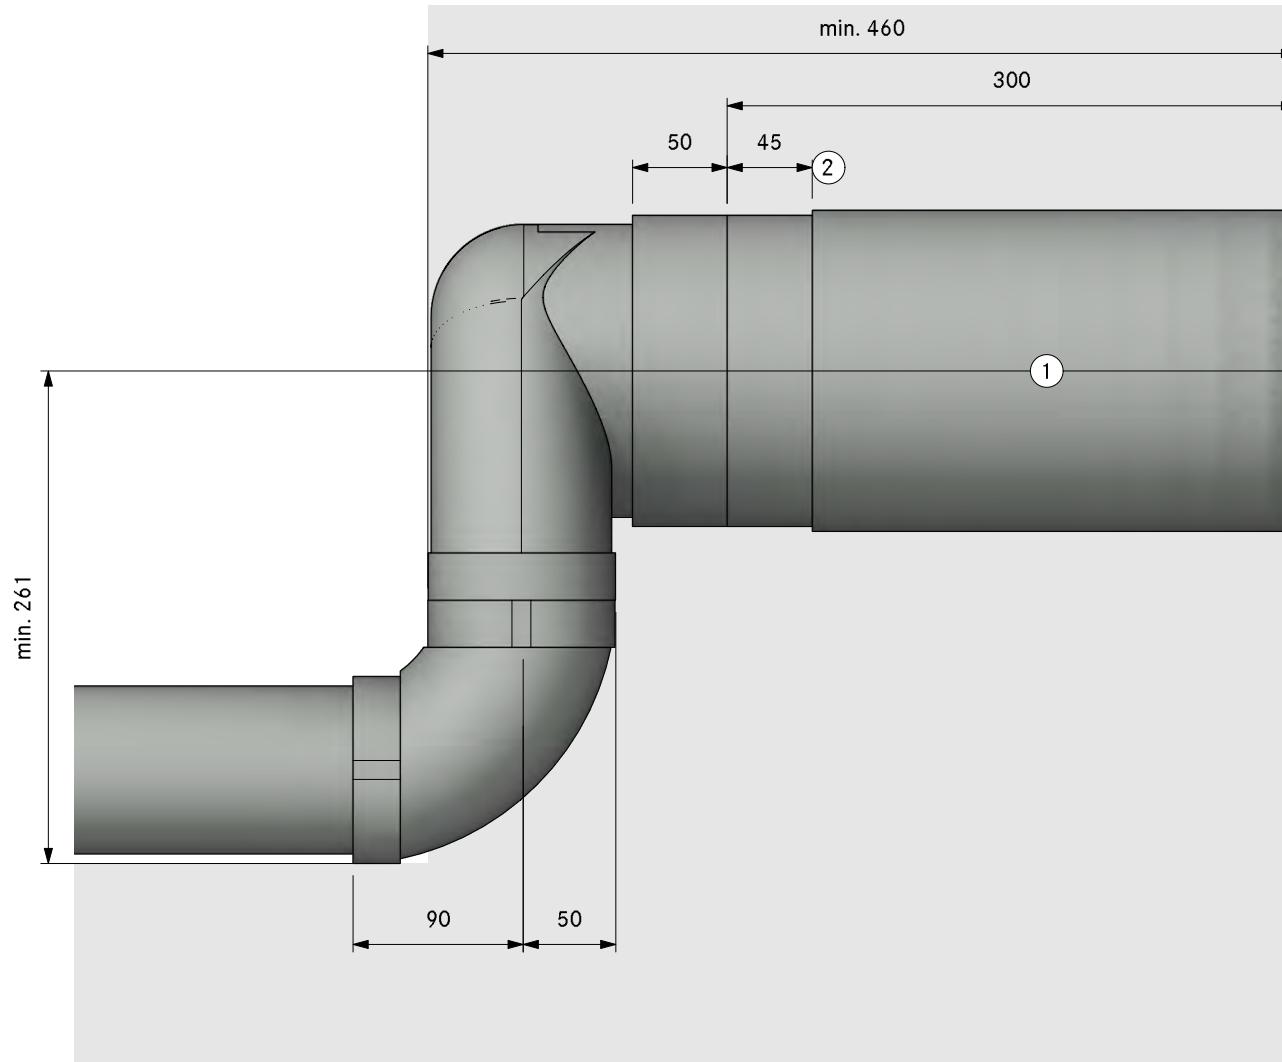

1. Hole size min. Ø180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA30310  
(X/M)Pure Floor front UEBF


LAYOUT

3D HK

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

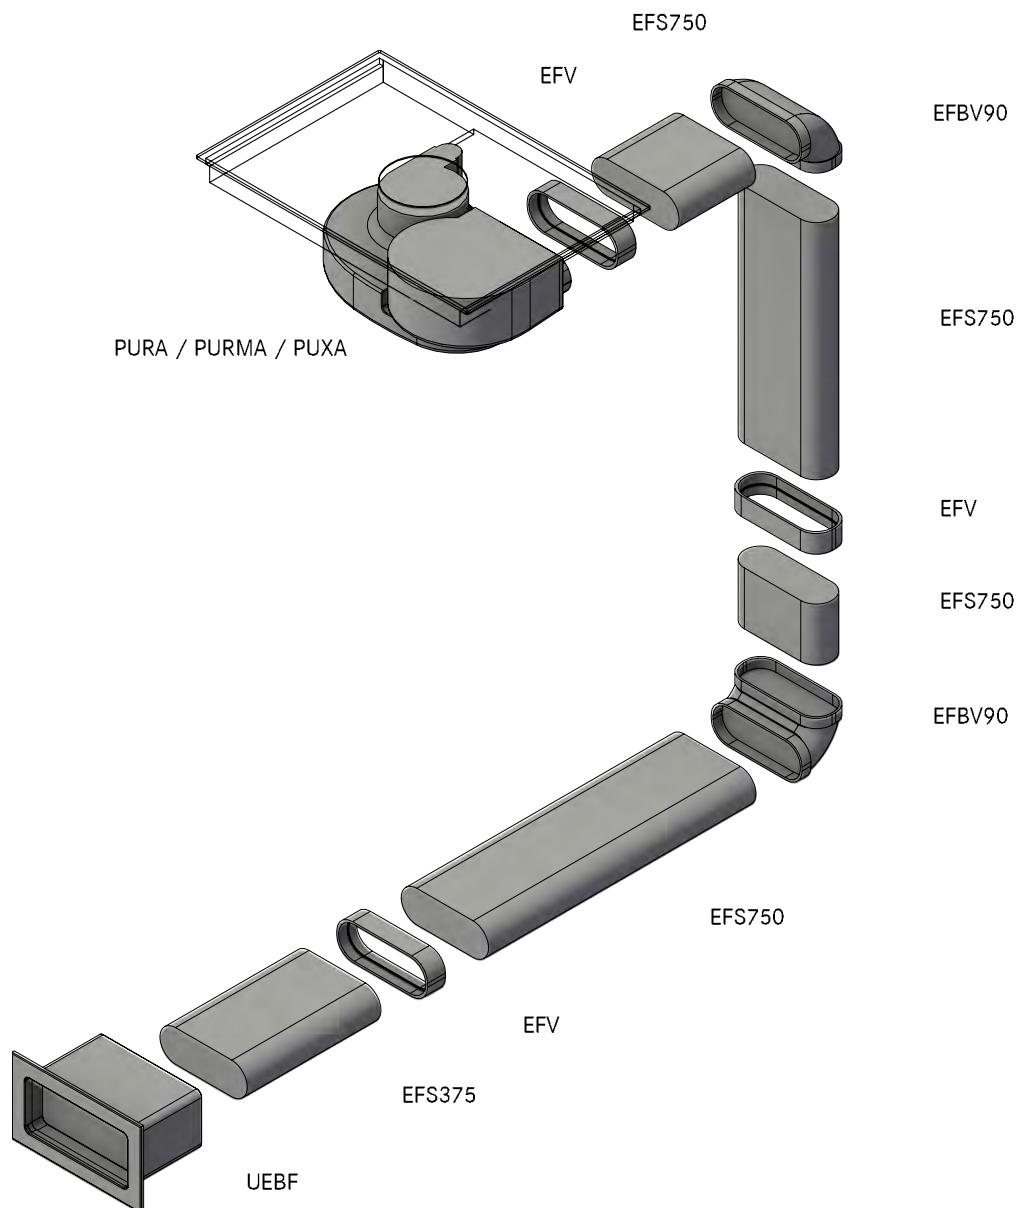

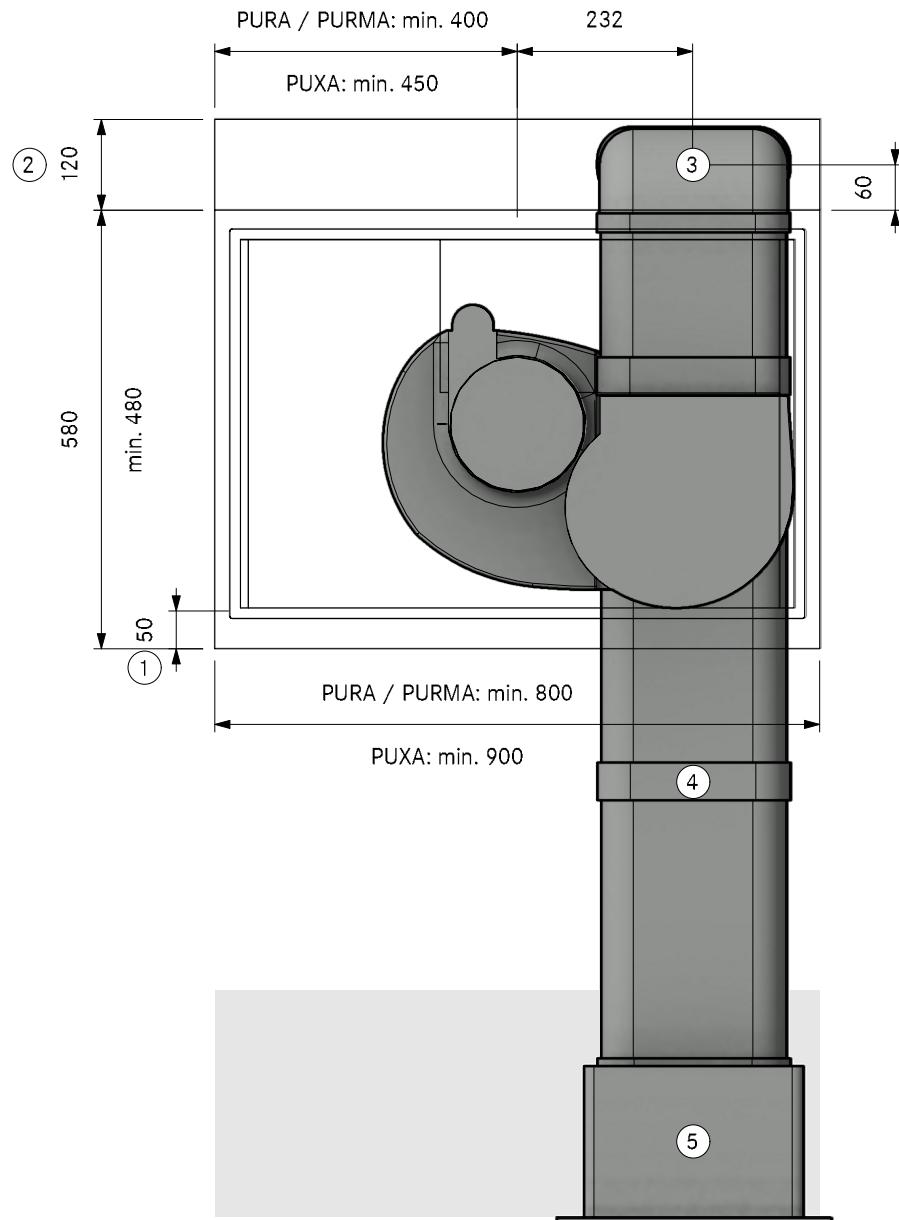

- ① At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ② Min. space required
- ③ Connection point Ecotube
- ④ Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- ⑤ Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30310  
(X/M)Pure Floor front UEBF

SA

Version, 1.0

**BORA**

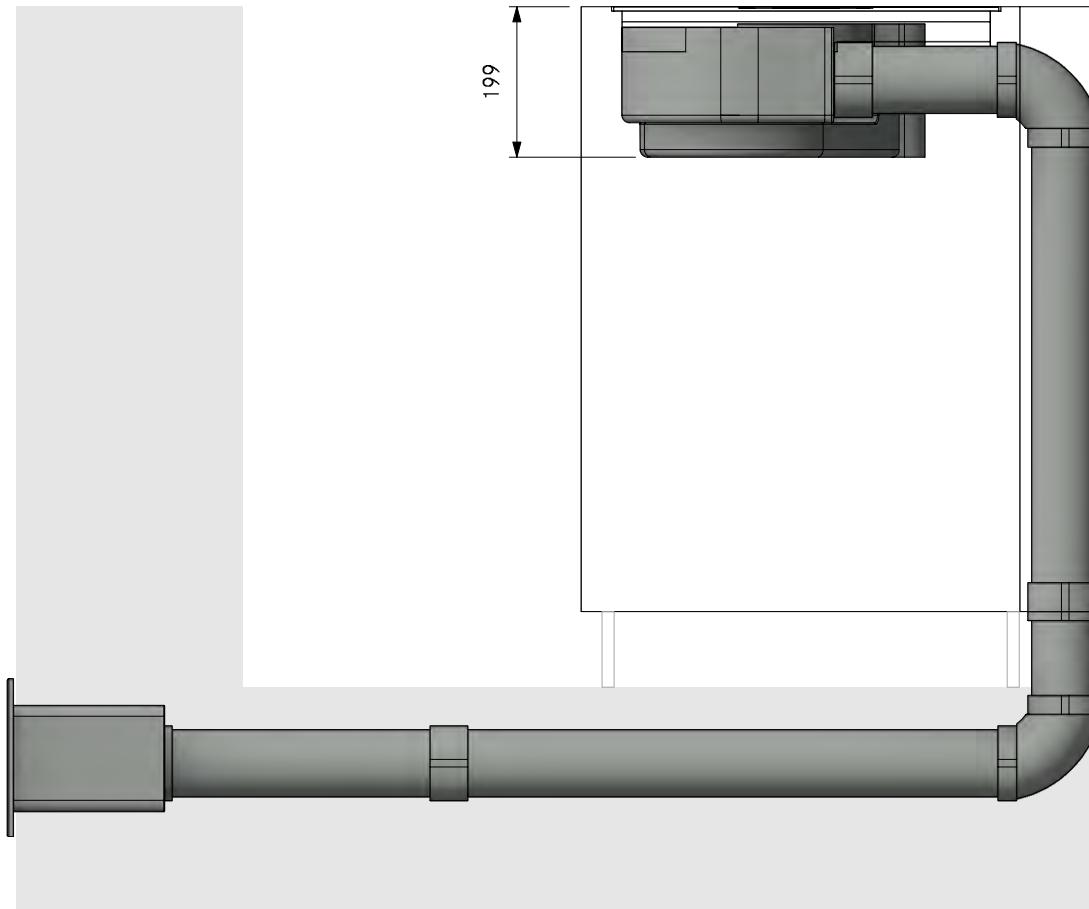

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30310  
(X/M)Pure Floor front UEBF

LAYOUT FA

Version, 1.0

**BORA**

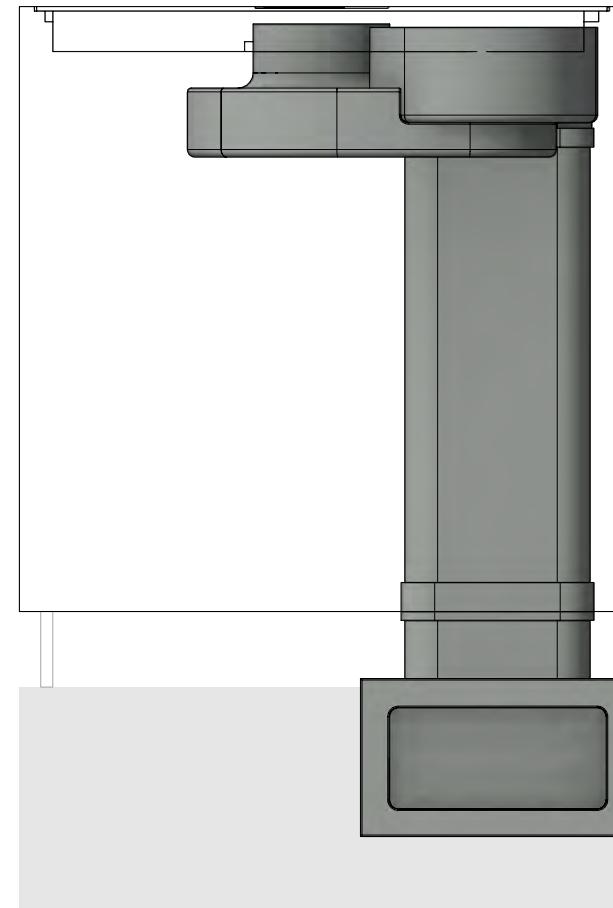

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30310  
(X/M)Pure Floor front UEBF

LAYOUT Detail

Version, 1.0

**BORA**

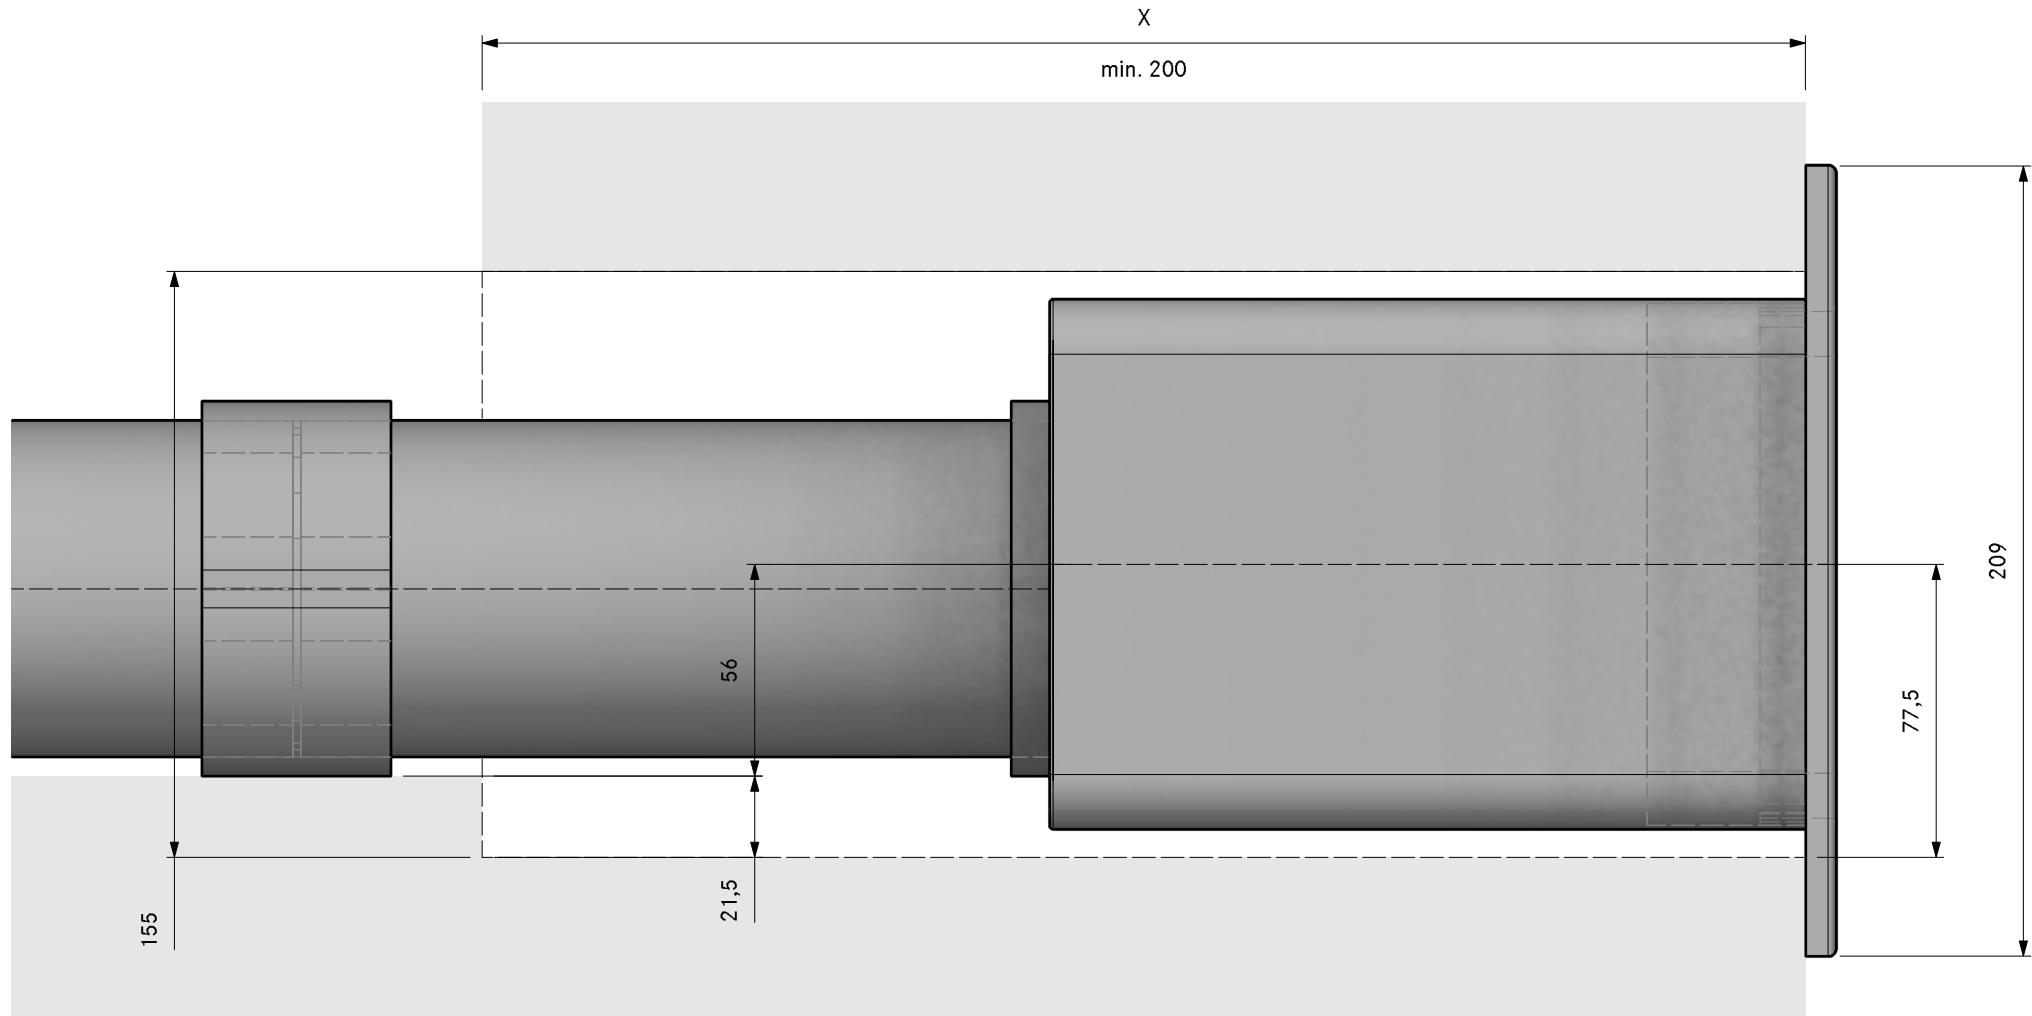

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


**PA30320**  
(X/M)Pure Floor front UEBR


LAYOUT

3D HK

Menge	Item BORA
1	PURA / Pure surface-/indcution cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
1	ERFG bridge flat round straight
2	EFV duct connection flat
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

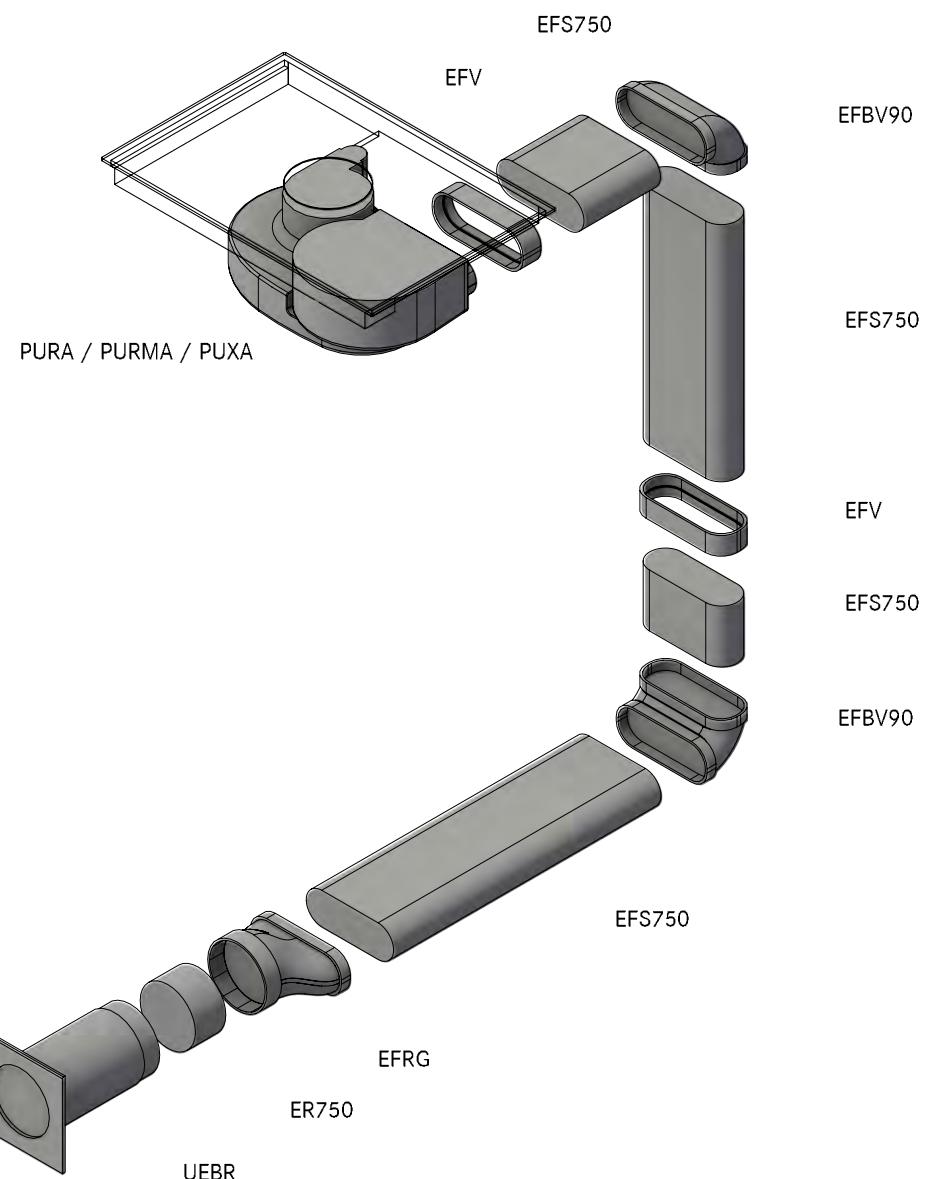

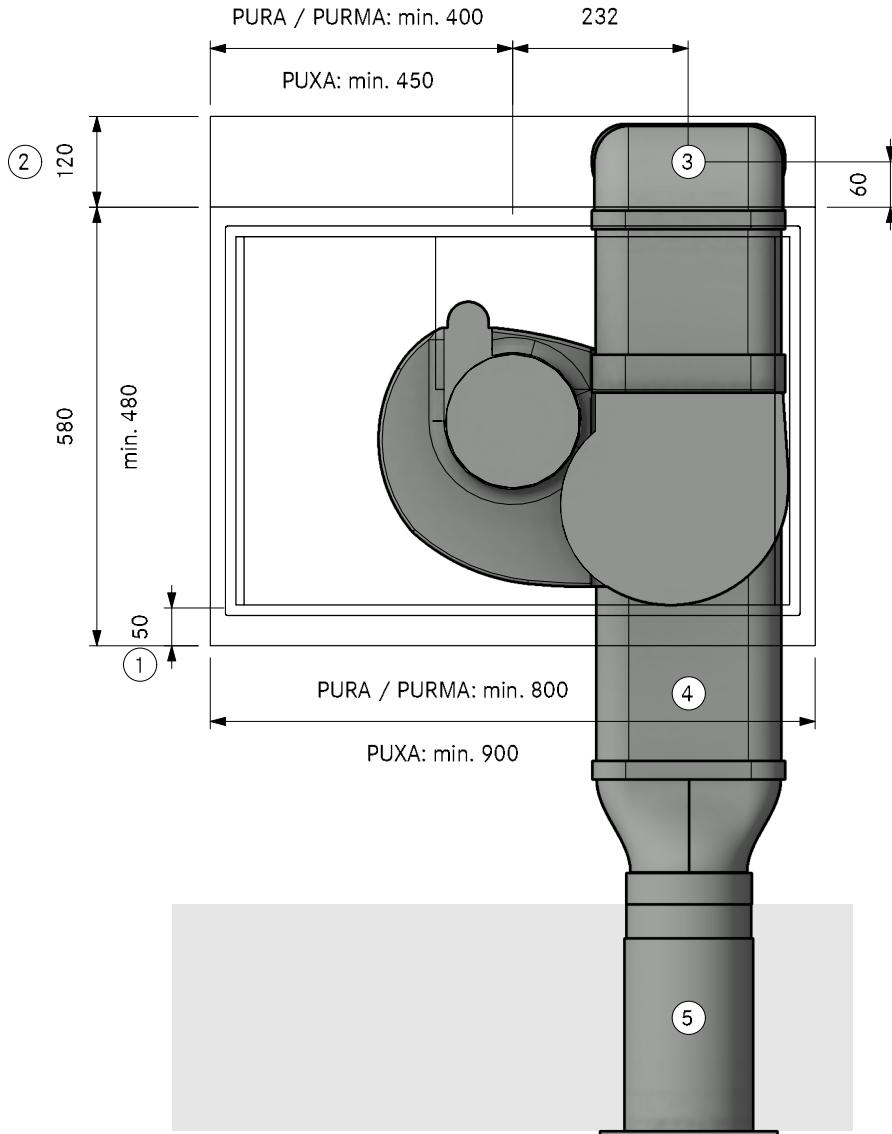


- (1) At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- (2) Min. space required
- (3) Connection point Ecotube
- (4) Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- (5) Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30320  
(X/M)Pure Floor front UEBR  
SA

Version, 1.0

**BORA**

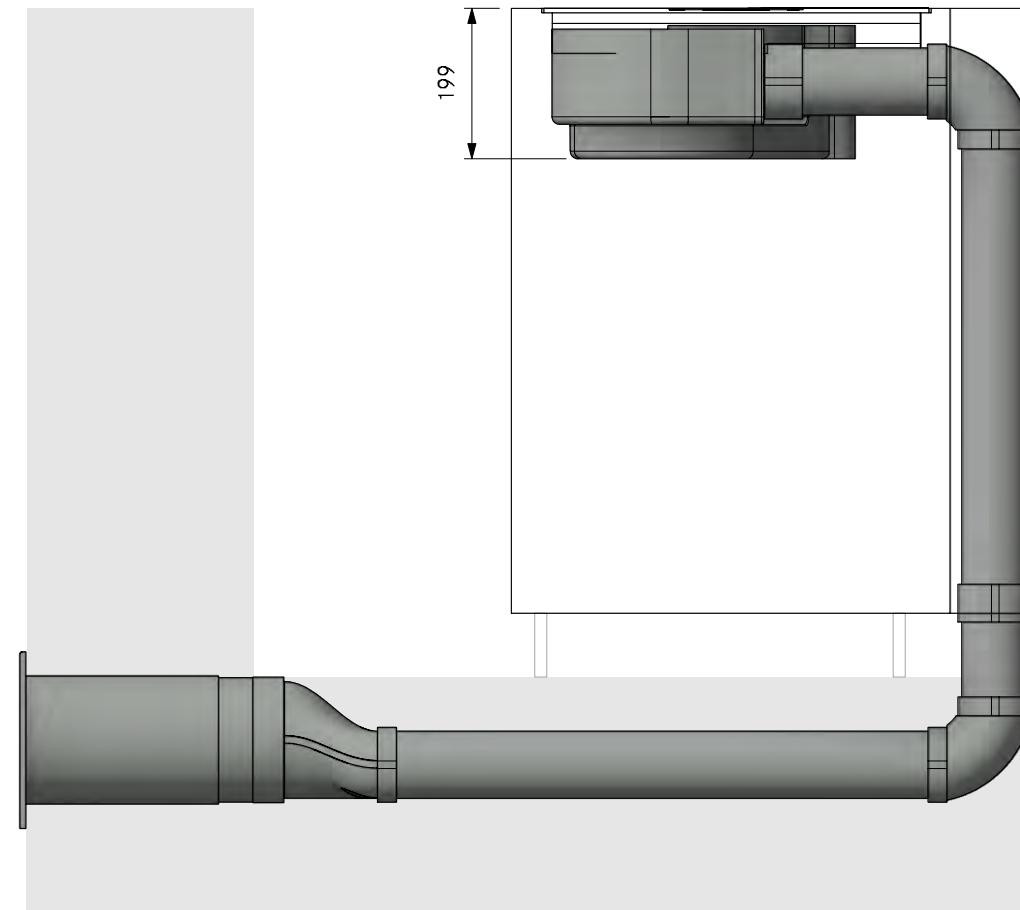

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30320  
(X/M)Pure Floor front UEBR

LAYOUT FA

Version, 1.0


**BORA**

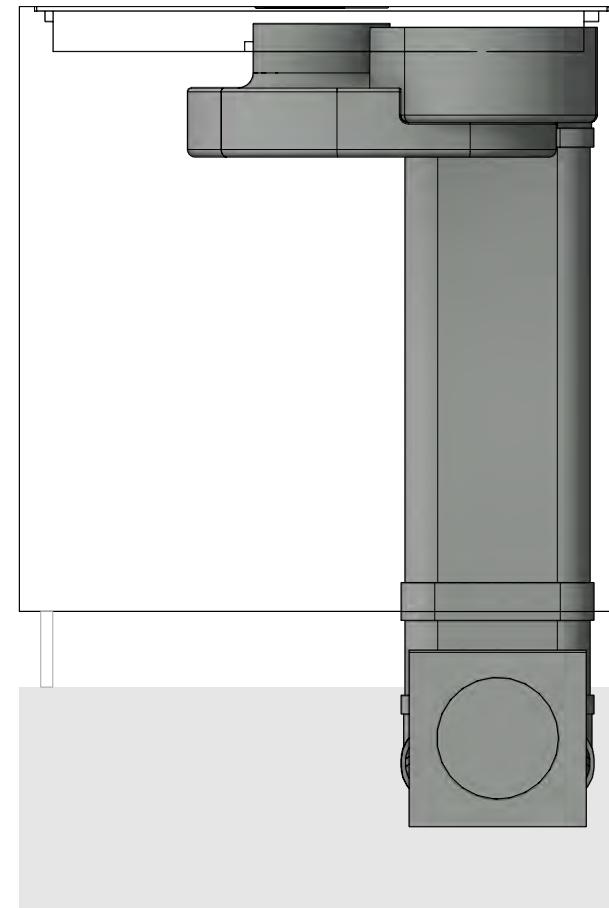


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


LAYOUT Detail

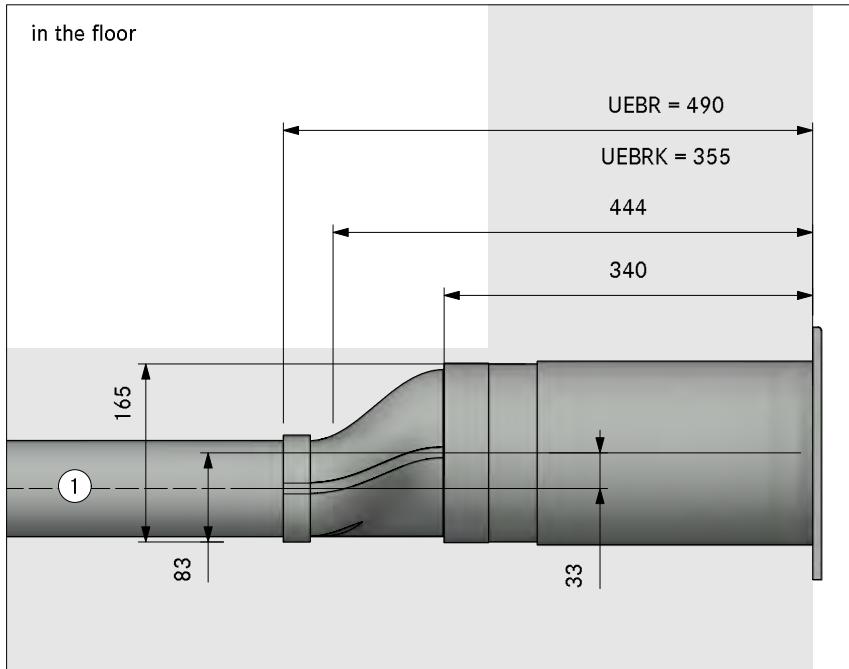

in the plinth area

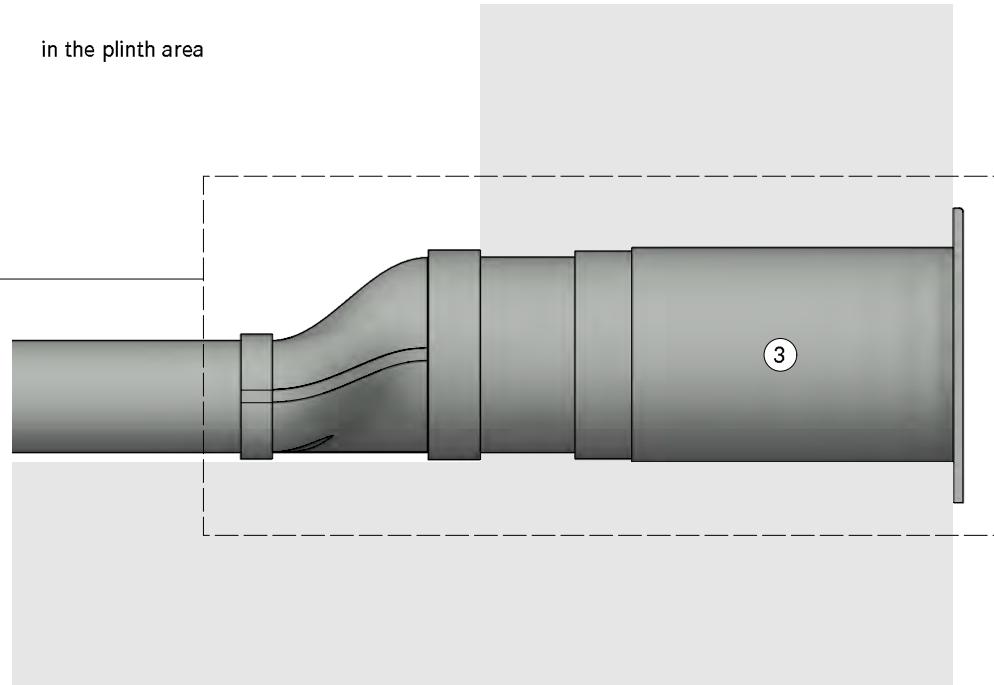

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

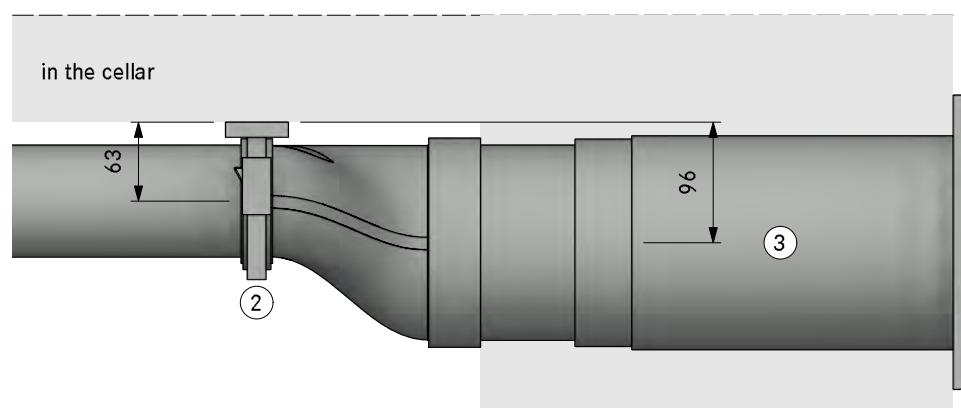



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA30330  
(X/M)Pure Floor front swan neck UEBF

LAYOUT

3D HK

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
4	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm


Please check for accuracy. Seals included. Are optically not displayed.

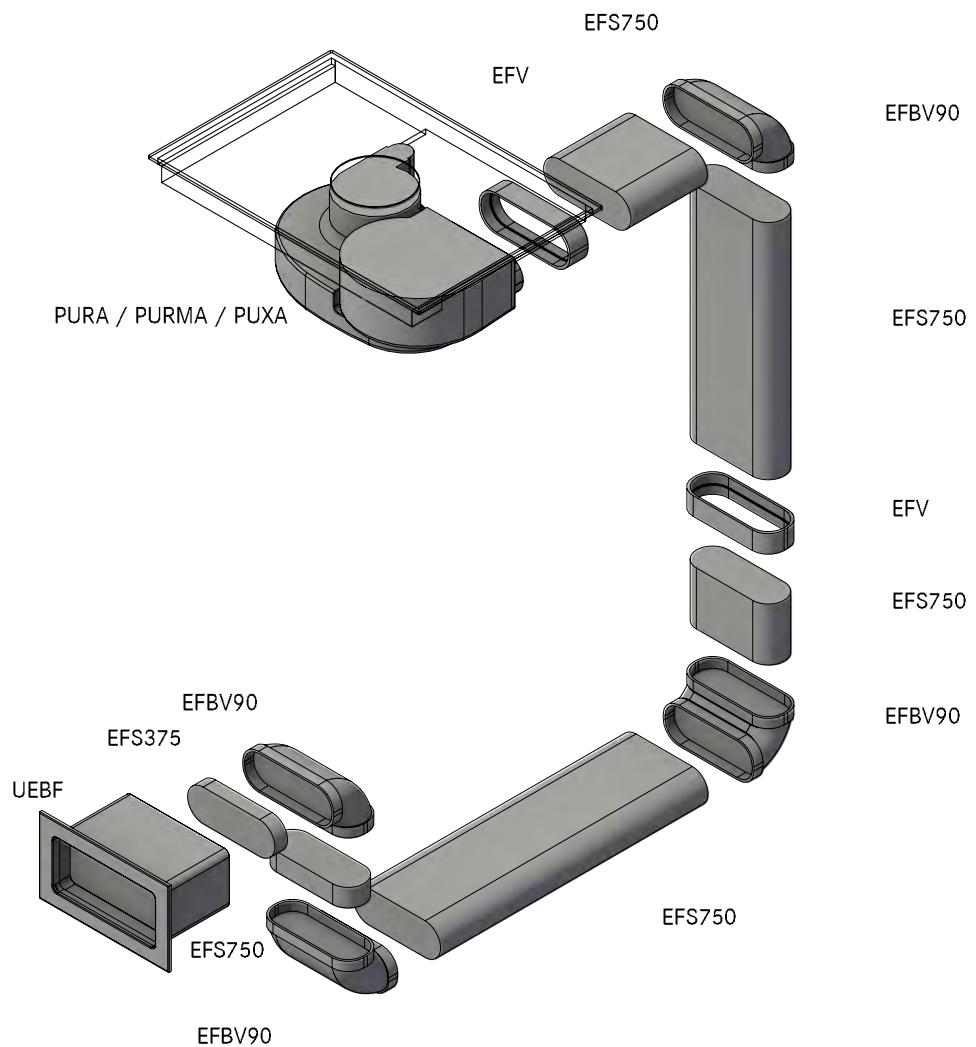

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30330  
(X/M)Pure Floor front swan neck UEBF

GR HK

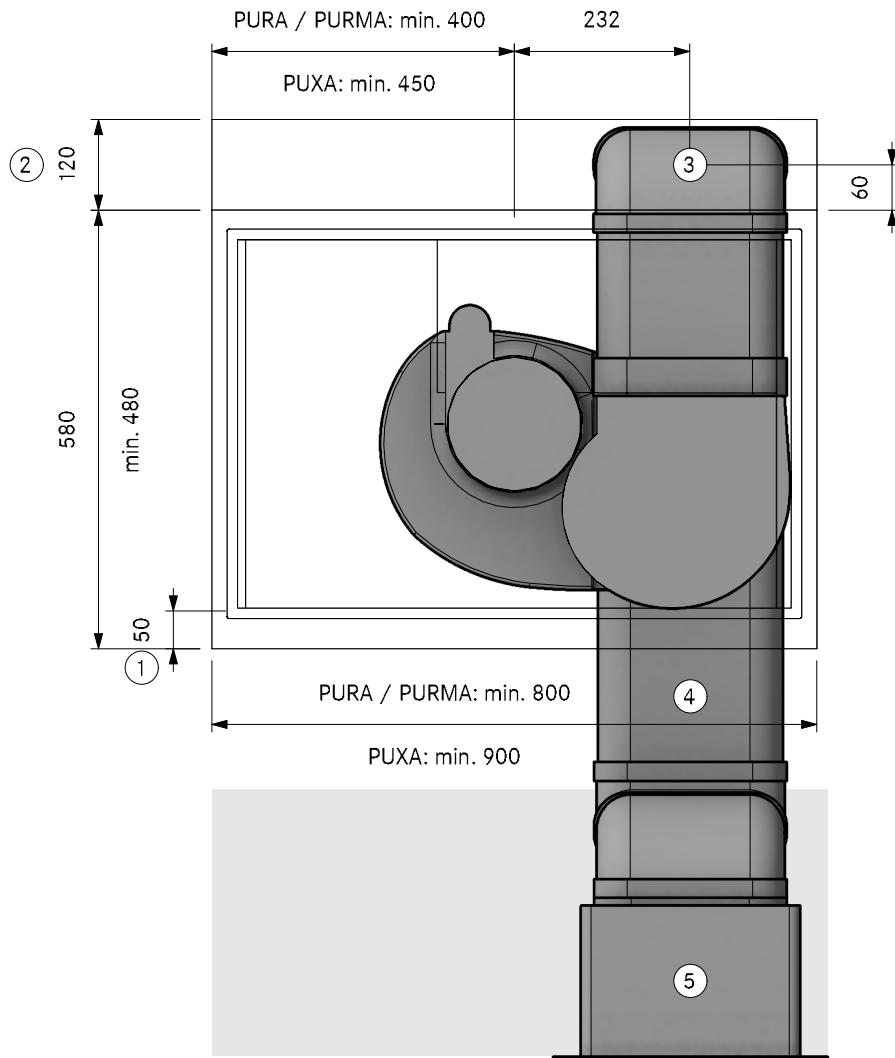


- (1.) At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- (2.) Min. space required
- (3.) Connection point Ecotube
- (4.) Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- (5.) Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30330  
(X/M)Pure Floor front swan neck UEBF

Version, 1.0

**BORA**

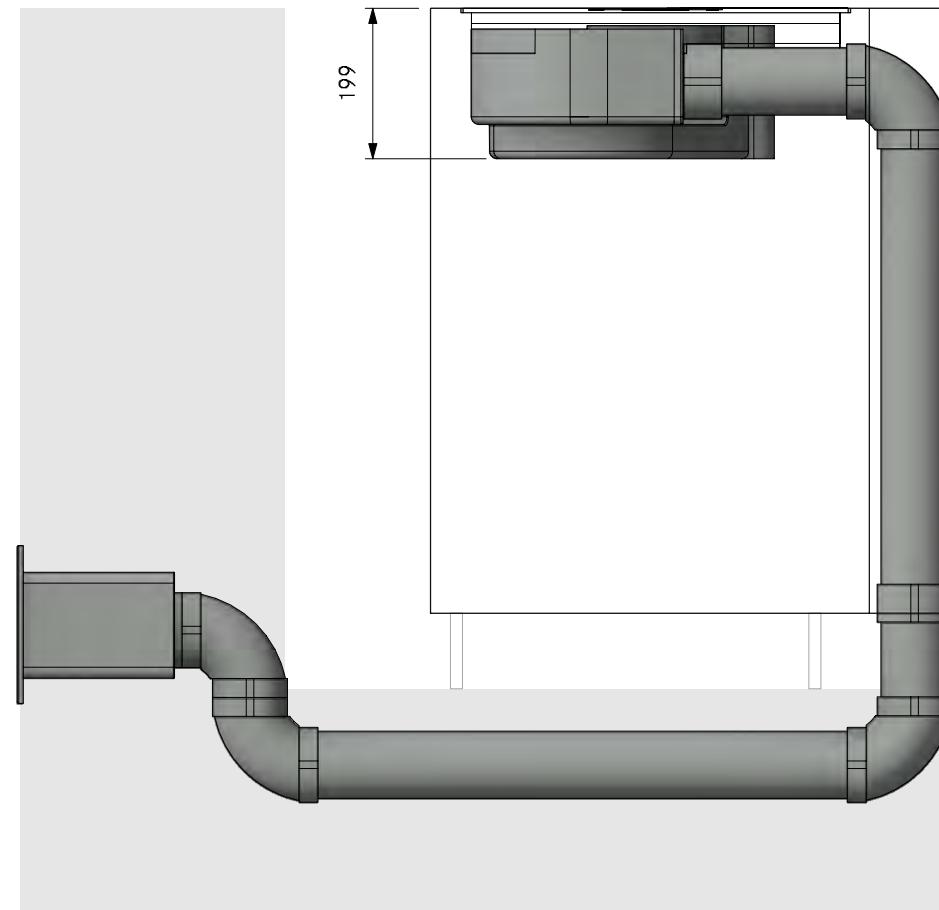

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30330  
(X/M)Pure Floor front swan neck UEBF

LAYOUT FA


Version, 1.0

**BORA**

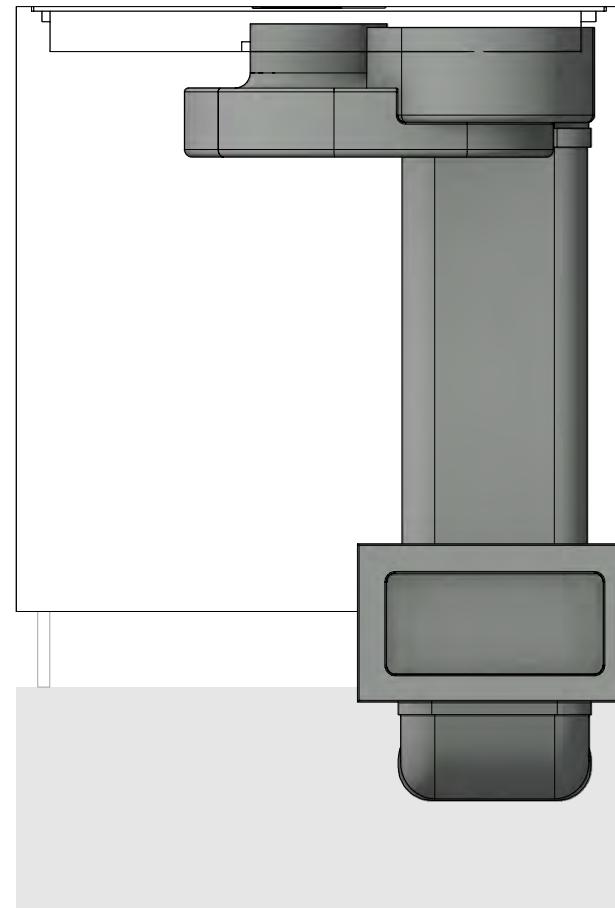

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

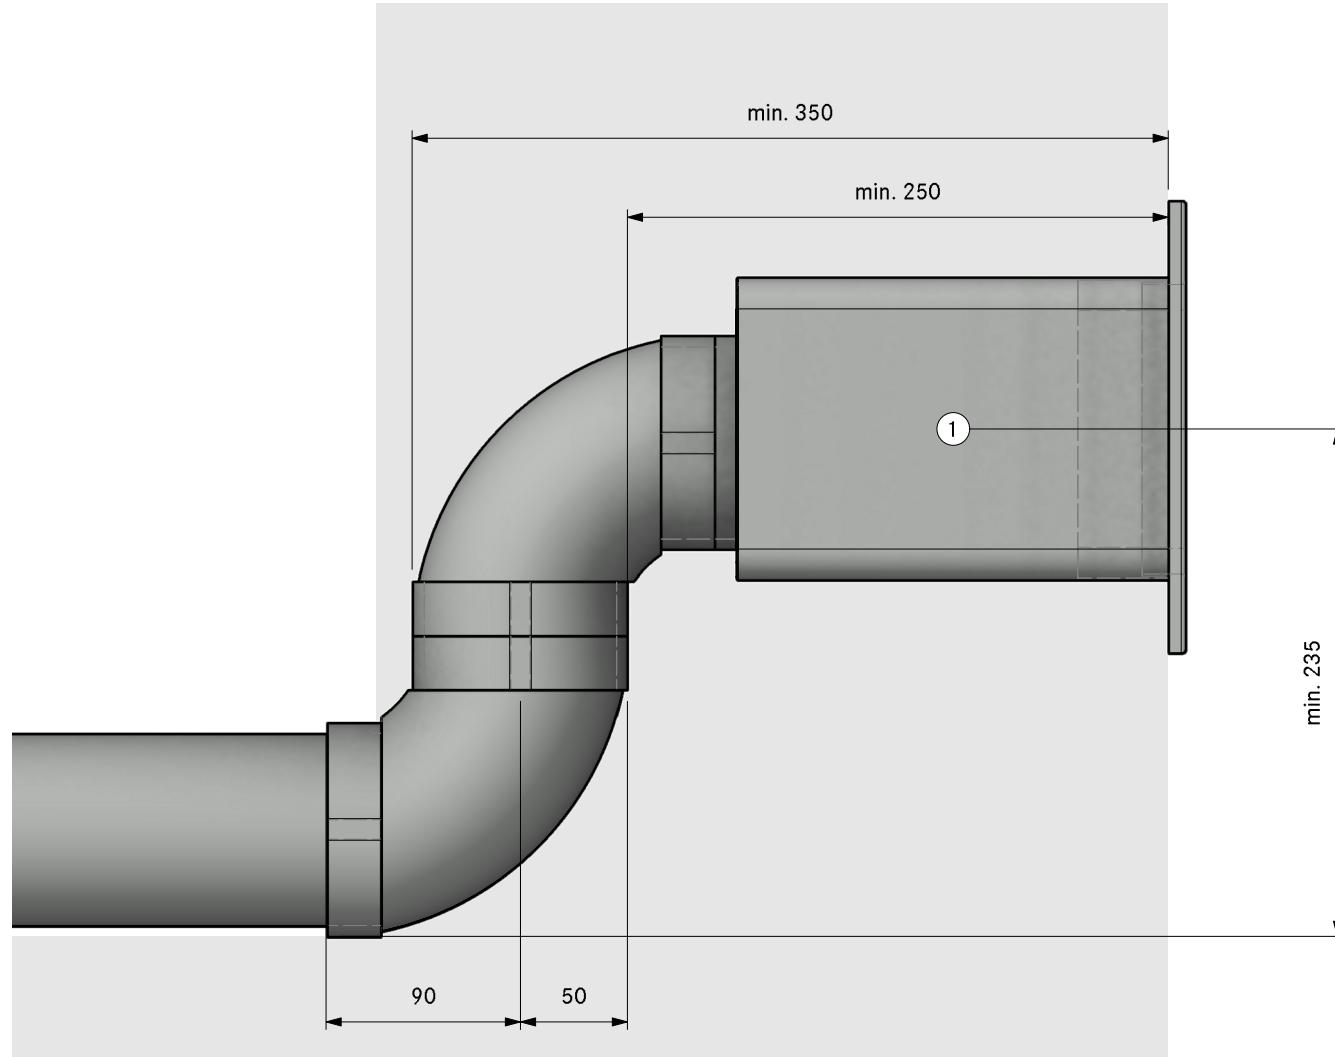

1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA30340  
(X/M)Pure Floor front swan neck UEBR

LAYOUT

3D HK


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

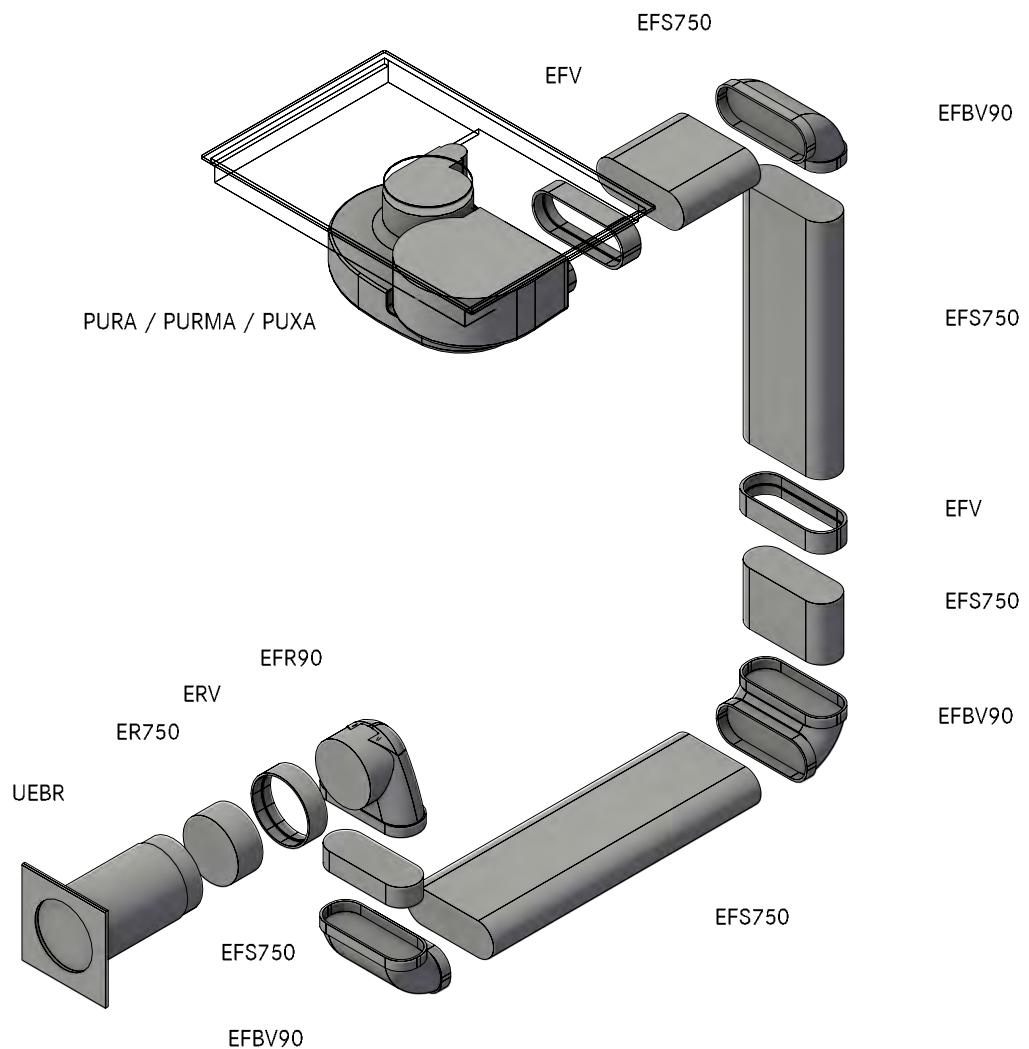

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30340  
(X/M)Pure Floor front swan neck UEBR  
GR HK

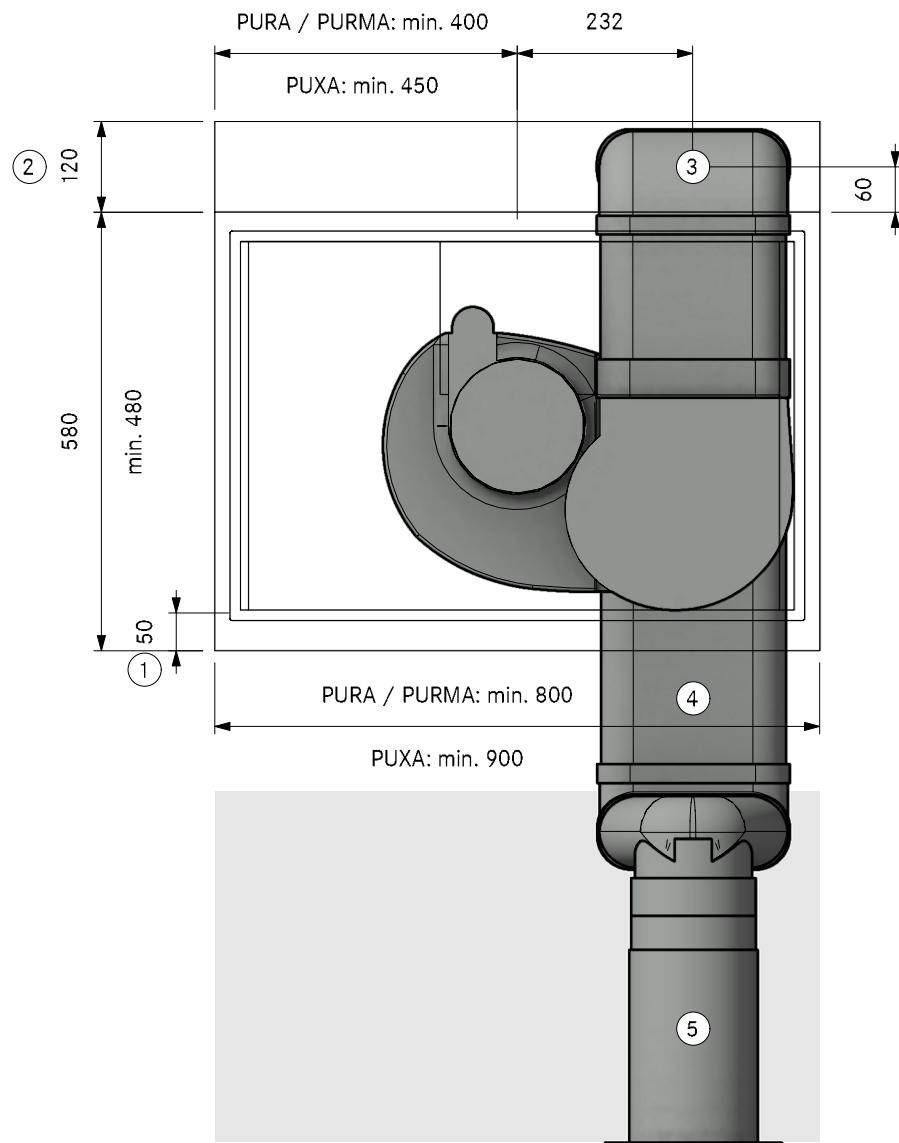


- (1) At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- (2) Min. space required
- (3) Connection point Ecotube
- (4) Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
- (5) Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30340  
(X/M)Pure Floor front swan neck UEBR  
SA

Version, 1.0

**BORA**

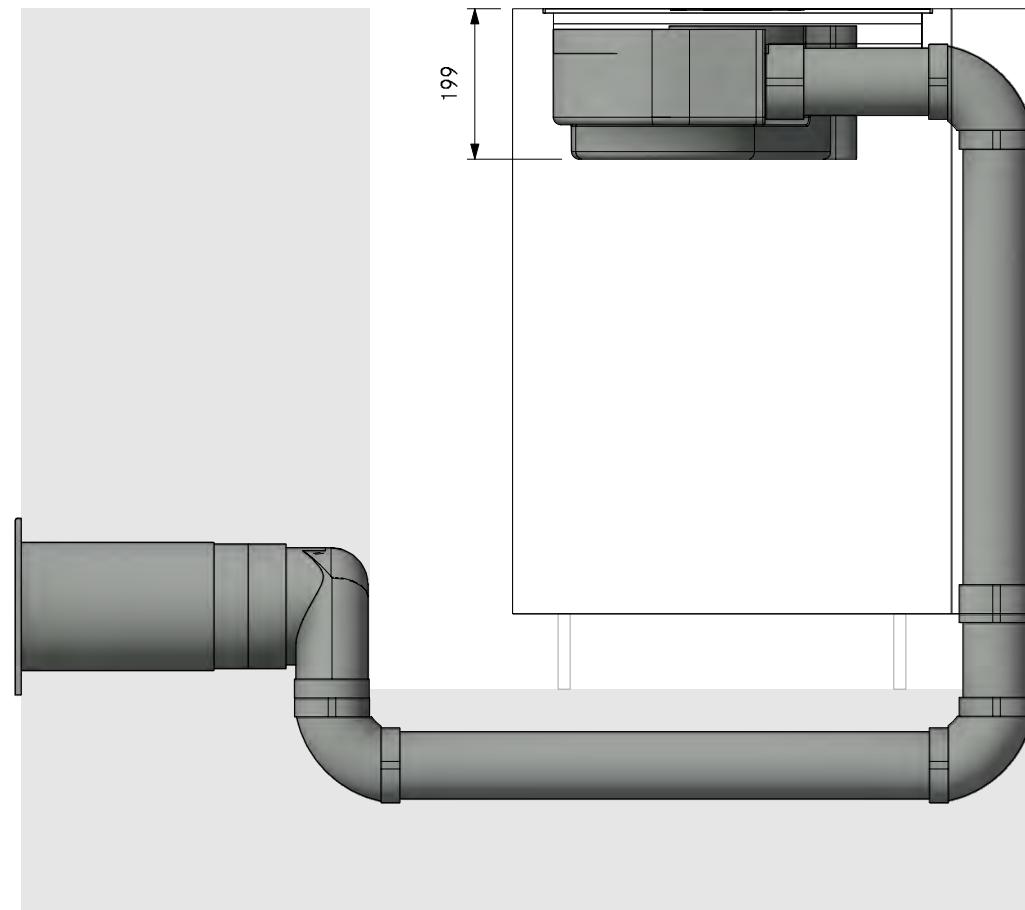

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA30340  
(X/M)Pure Floor front swan neck UEBR


Version, 1.0

**BORA**

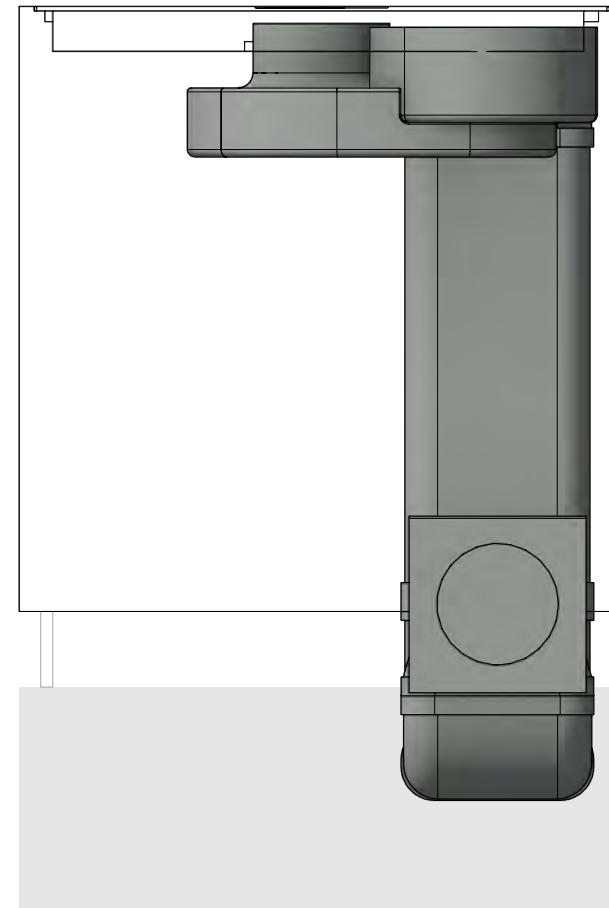


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

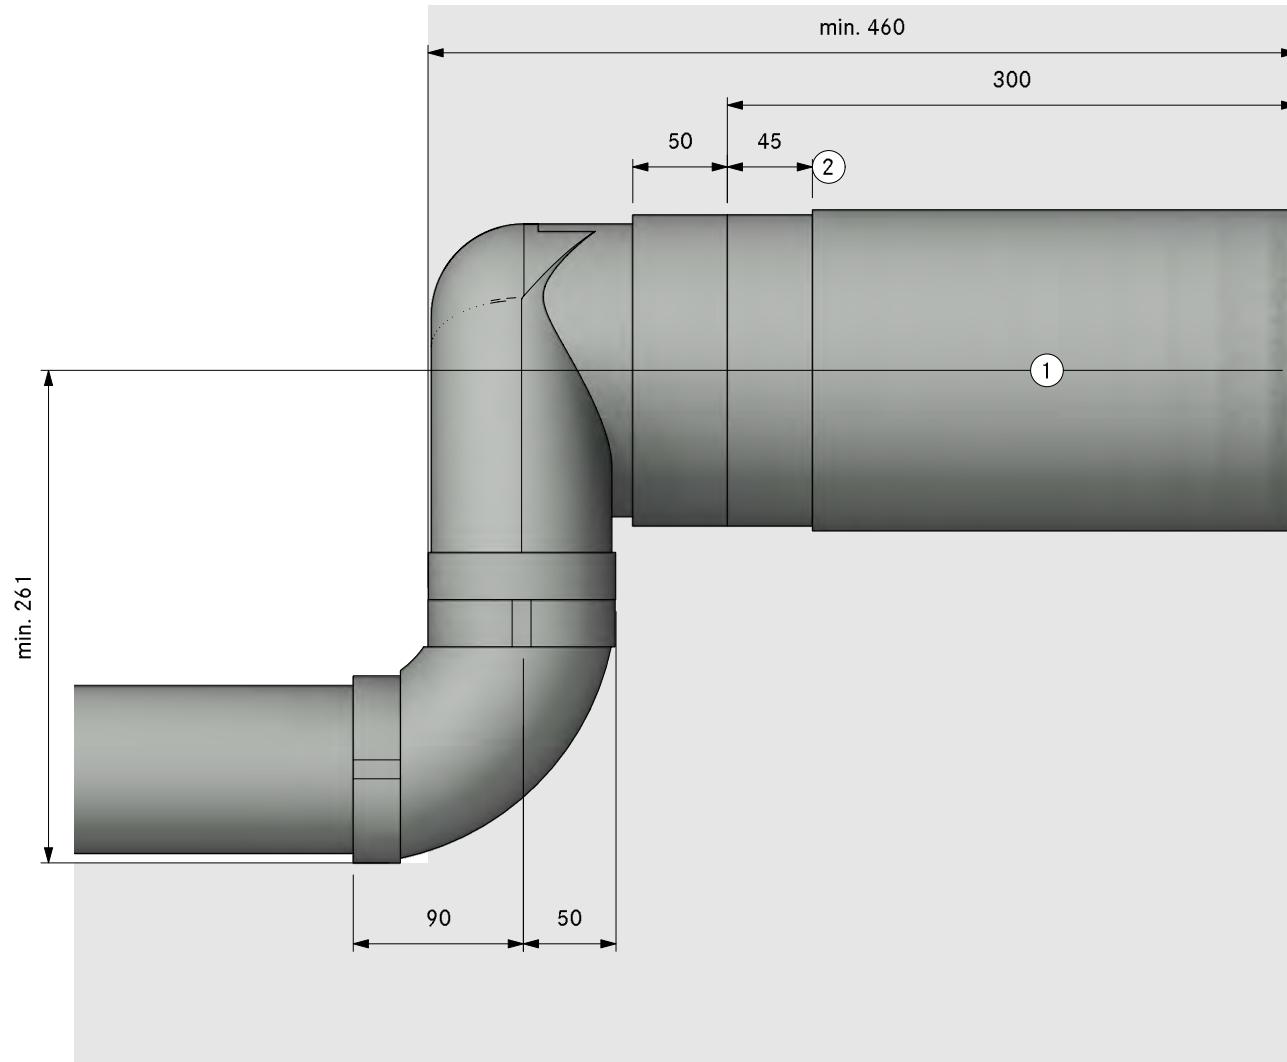

1. Hole size min. Ø180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)




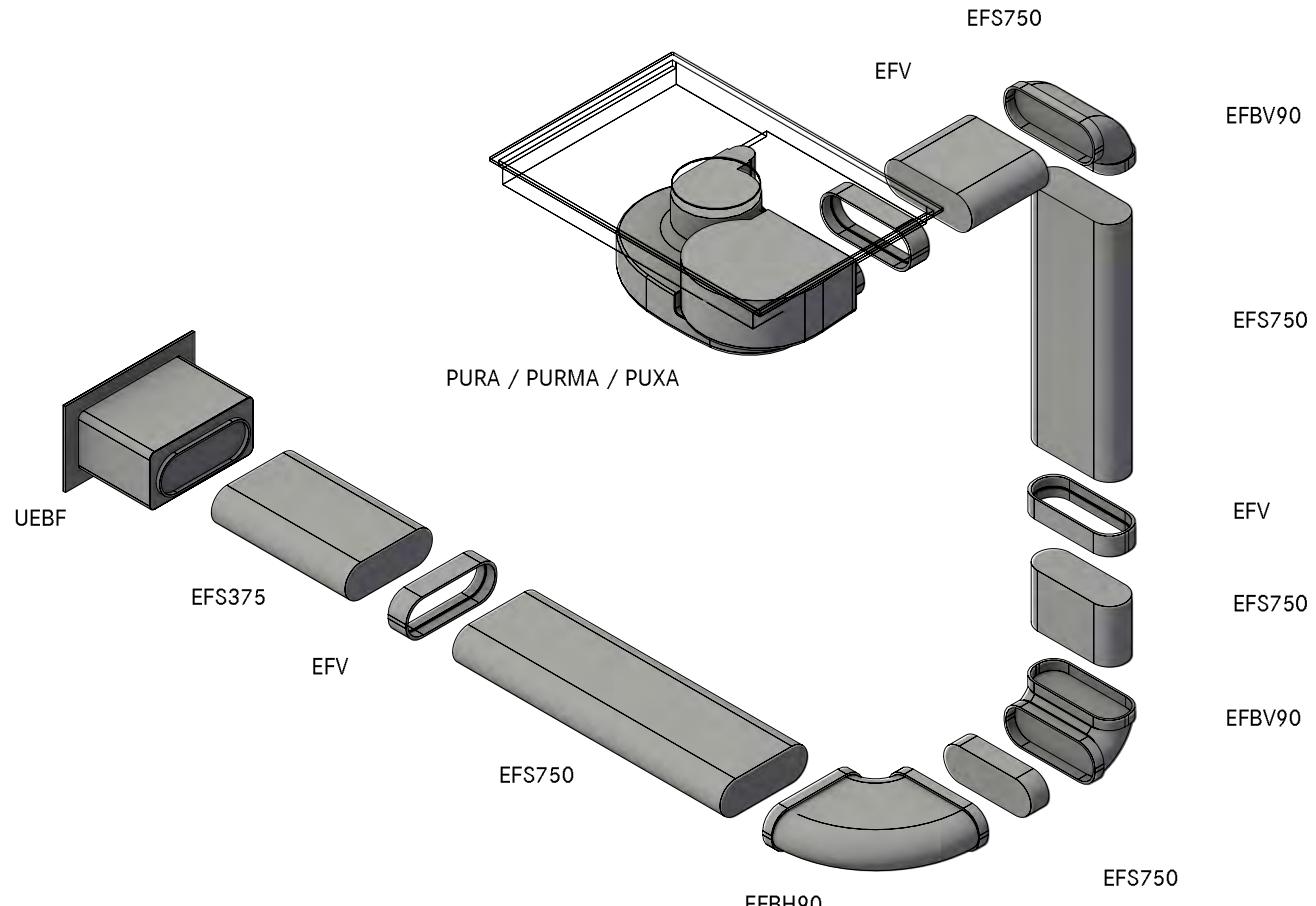

Count	Item BORA	
1	PURA / PURMA / PUXA	Pure surface- / induction cooktop with integrated cooktop extractor - Exhaust air
<b>Item BORA Ecotube</b>		
1	EFBH90	90° bend flat horizontal
2	EFBV90	90° bend flat vertical
3	EFV	duct connection flat
1	UEBF	3box wall sleeve
3	EFS750	shallow duct with partition 750mm

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

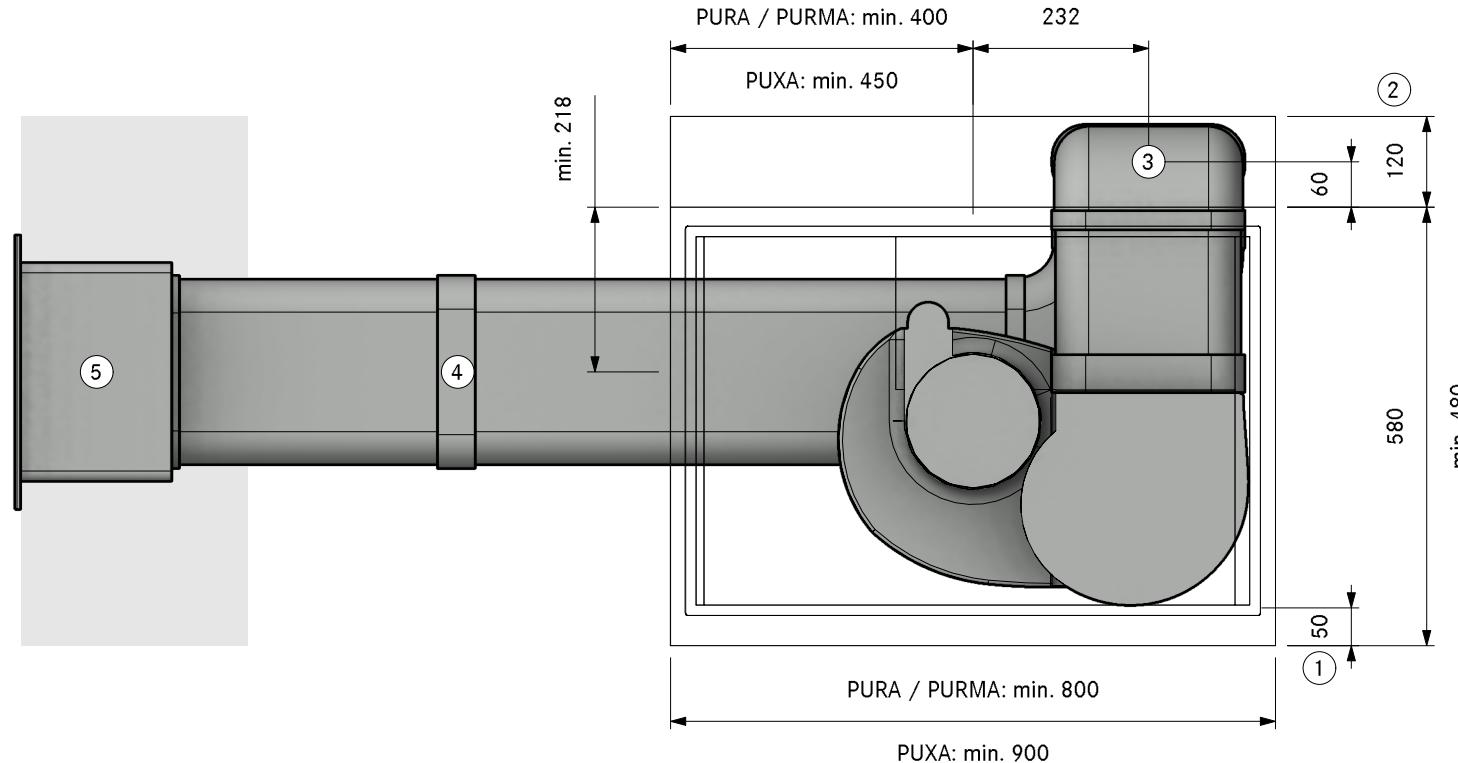


1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30410  
(X/M)Pure Floor left UEBF  
SA

Version, 1.0

**BORA**

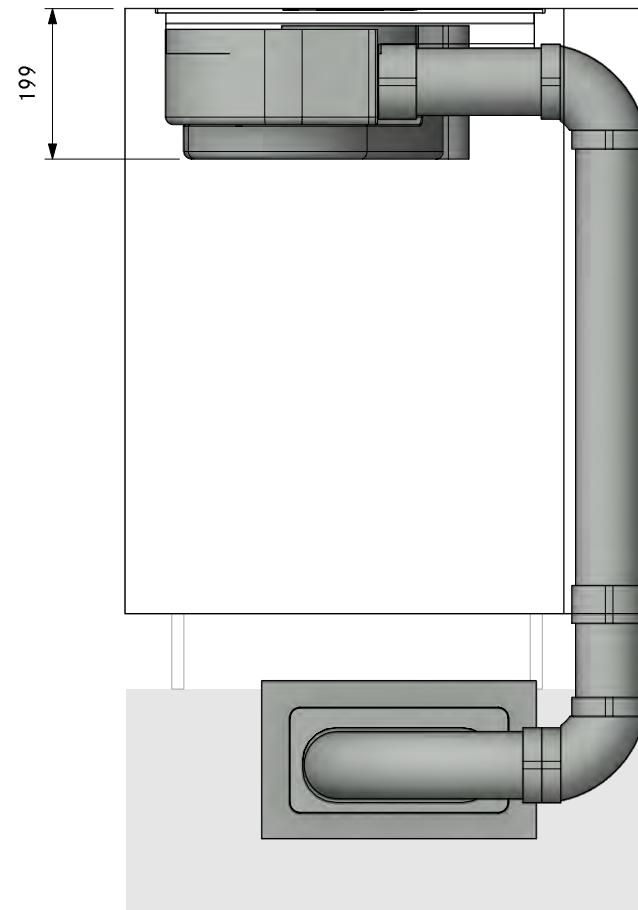

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30410  
(X/M)Pure Floor left UEBF

LAYOUT FA


Version, 1.0

**BORA**

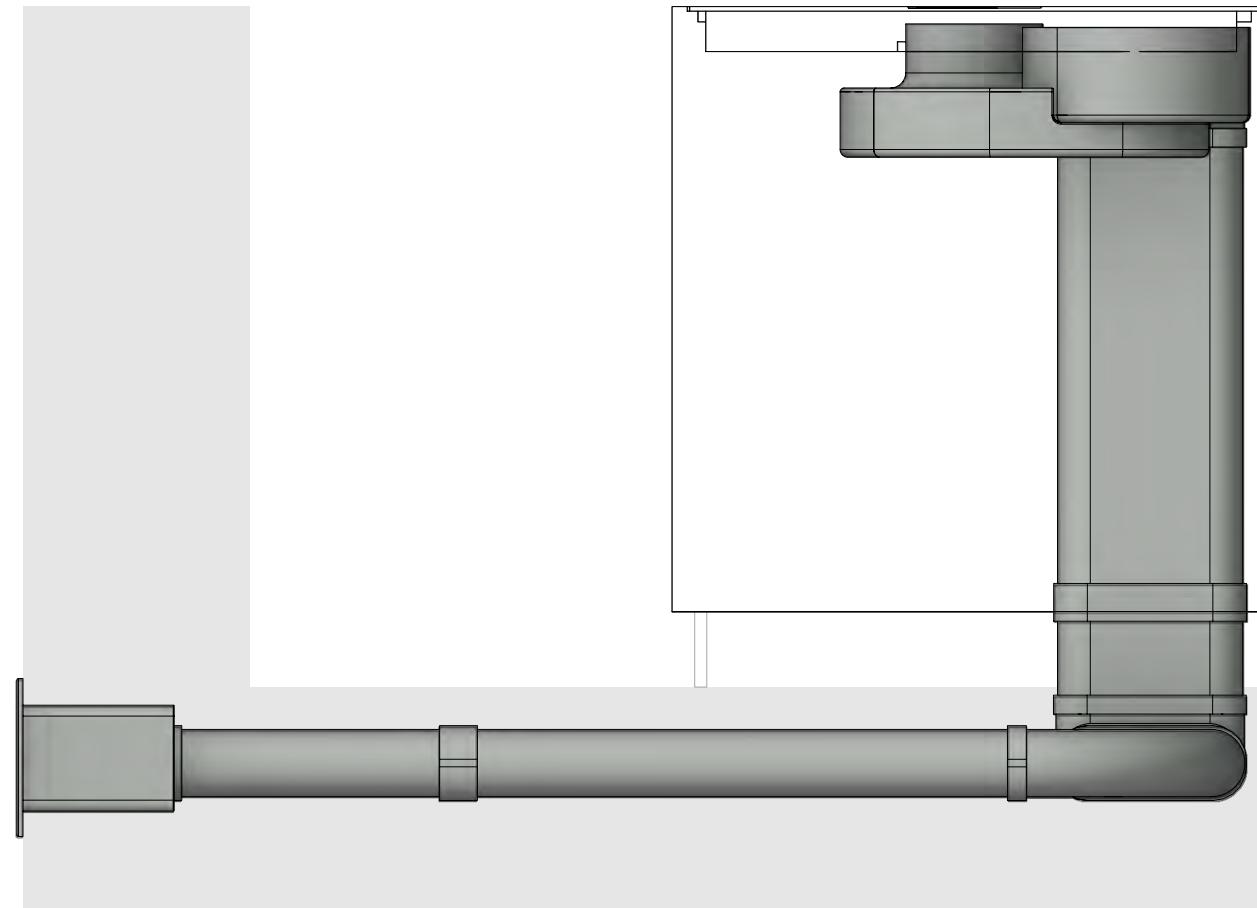

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

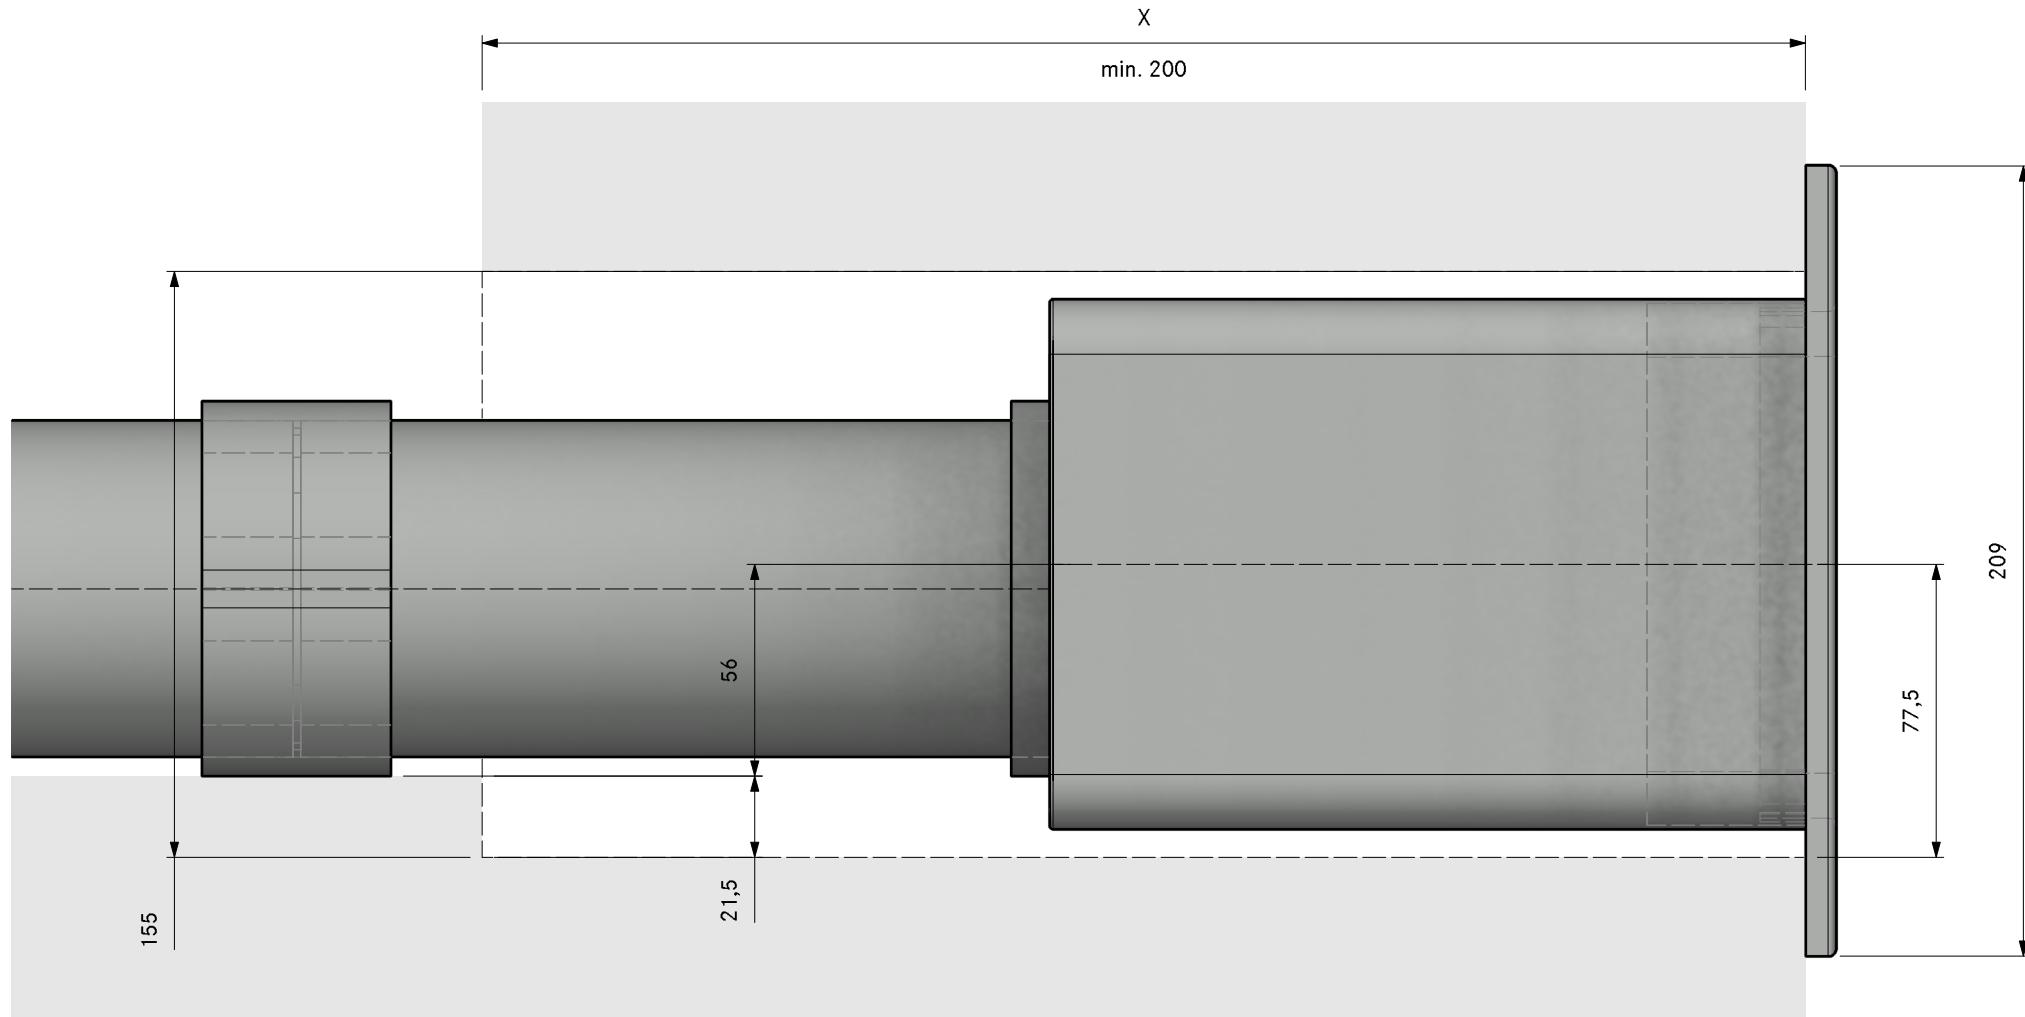




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30420  
(X/M)Pure Floor left UEBR

LAYOUT 3D

Version, 1.0


**BORA**

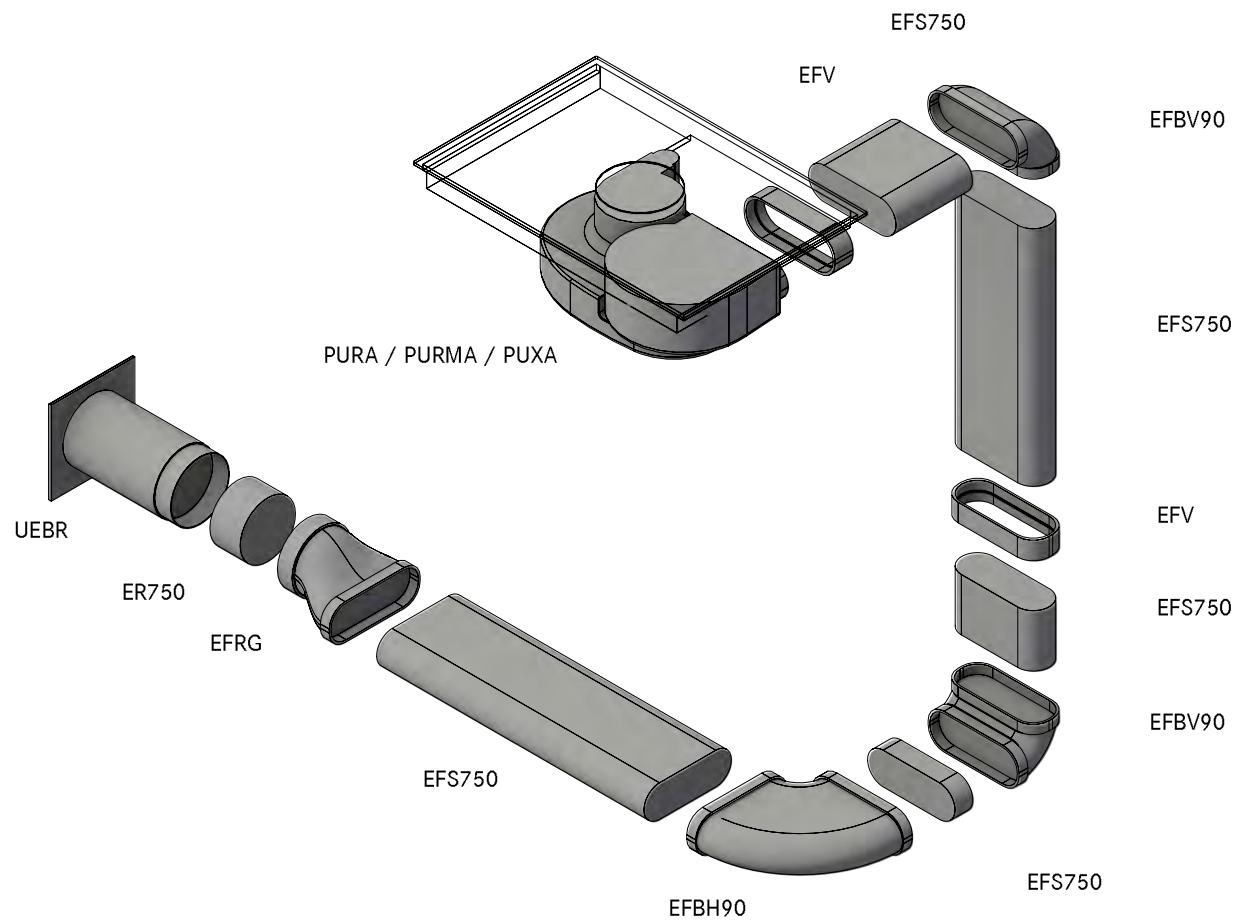

Count	Item BORA
1	PURA / Pure surface-/indcution cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFRG bridge flat round straight
2	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.	

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

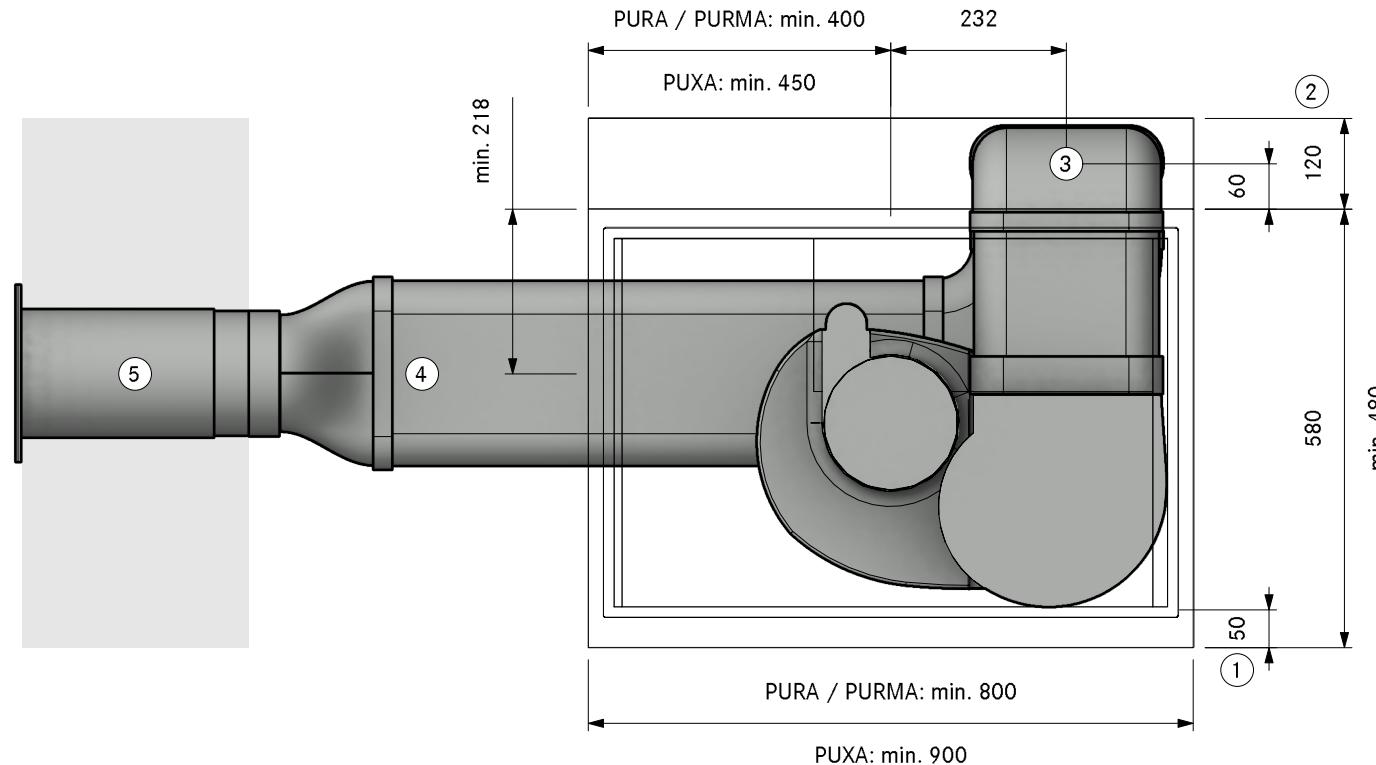

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30420  
(X/M)Pure Floor left UEBR

LAYOUT SA

Version, 1.0

**BORA**

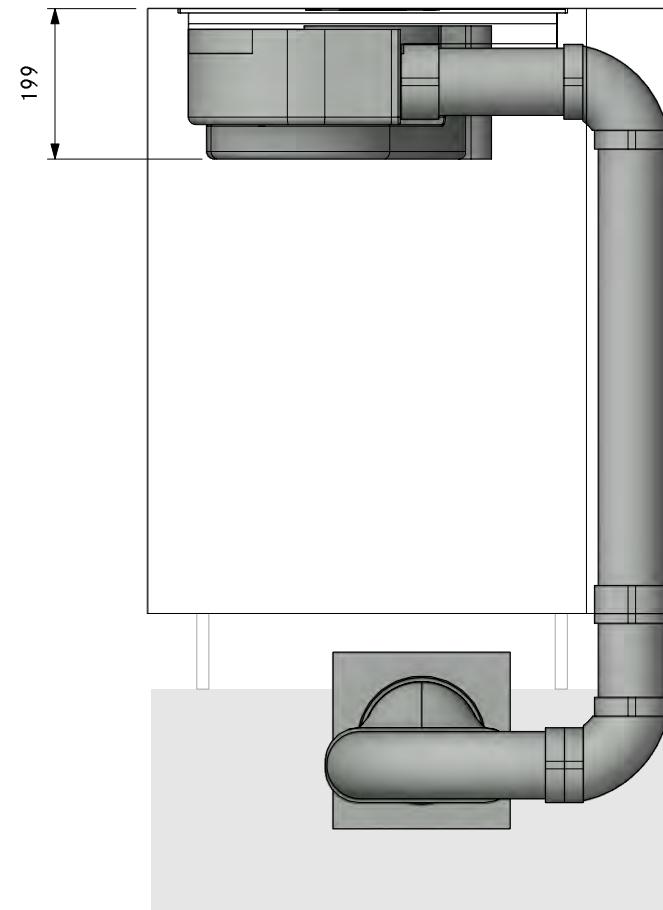

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30420  
(X/M)Pure Floor left UEBR

LAYOUT FA

Version, 1.0

**BORA**

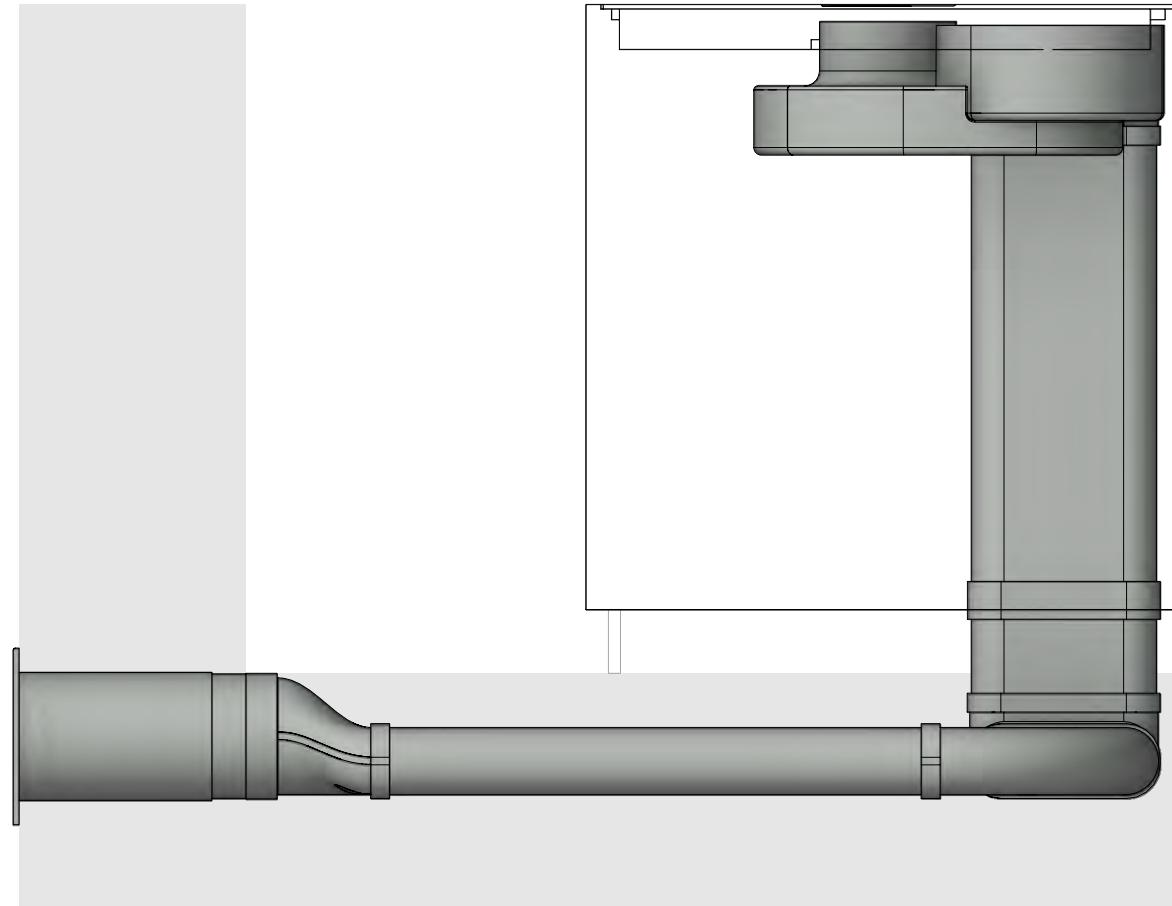


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT


Detail

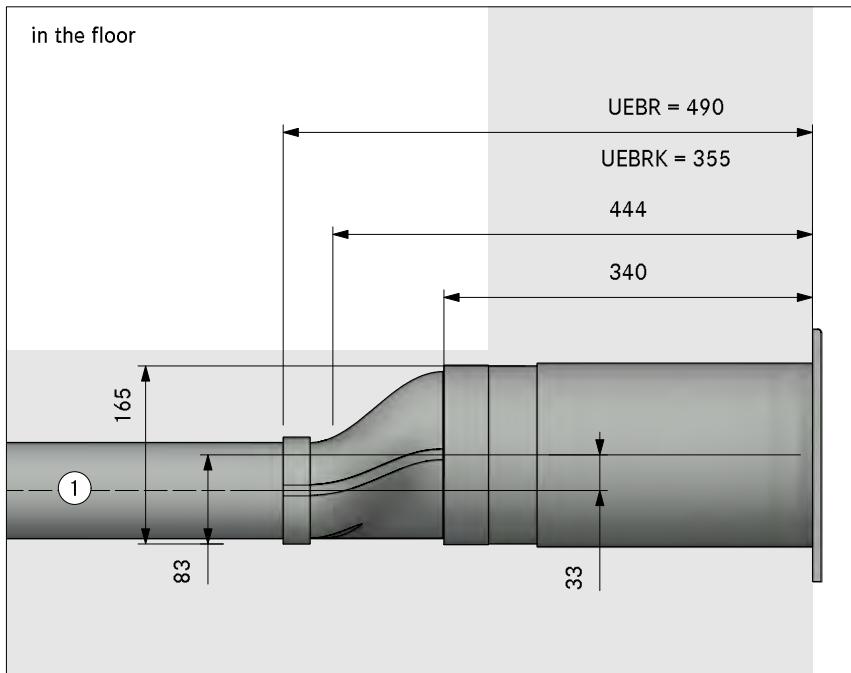


in the plinth area

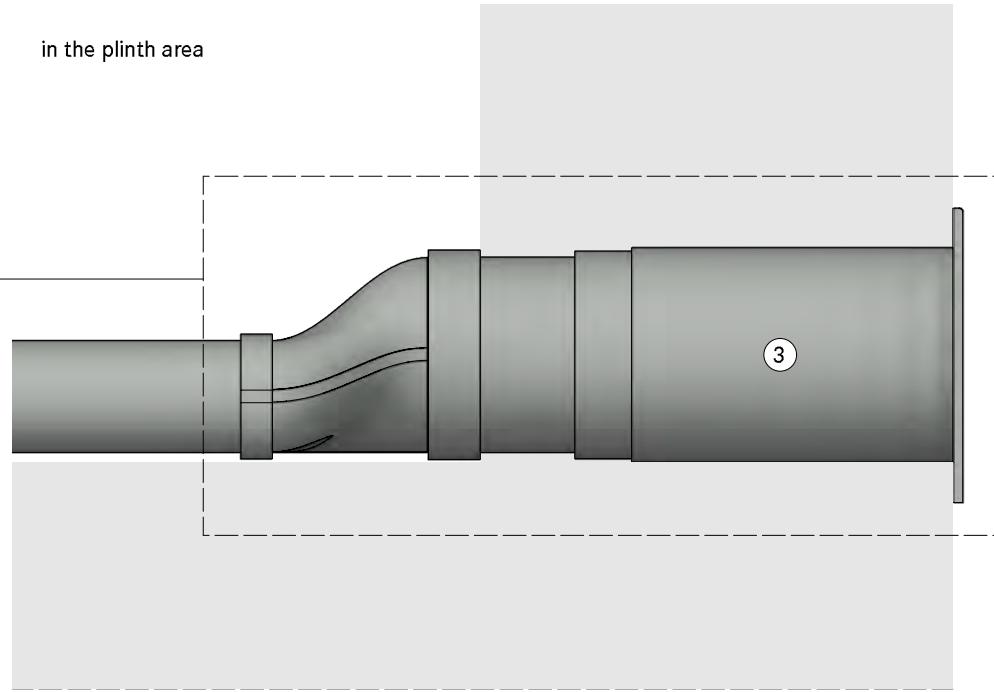

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

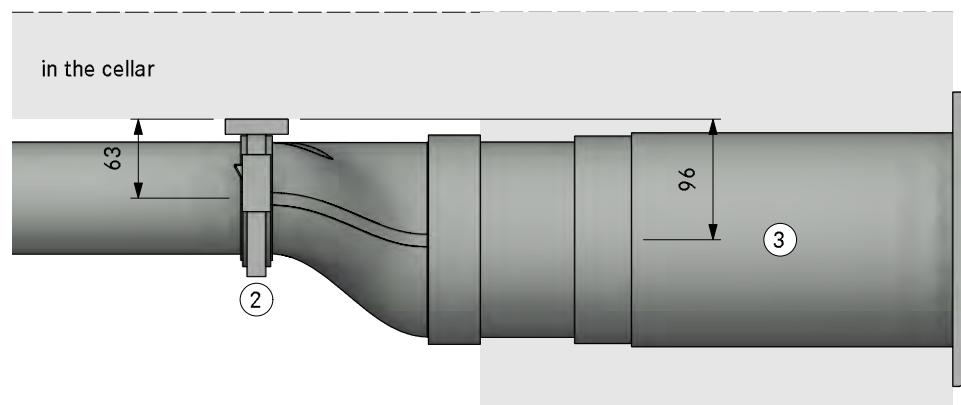




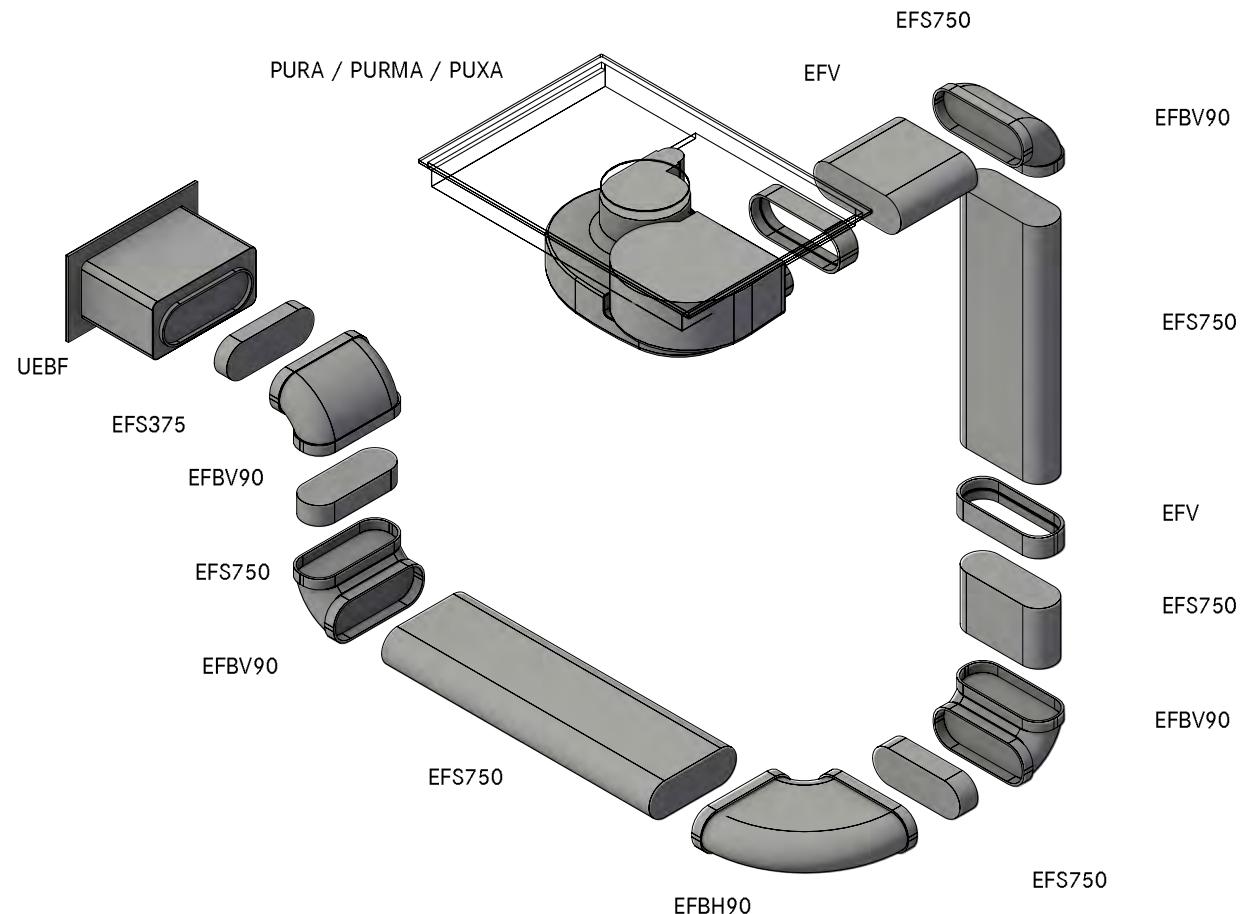

Count	Item BORA
1	PURA / PURMA / PUXA Pure surface-/induction cooktop with integrated cooktop extractor - Exhaust air
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
4	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

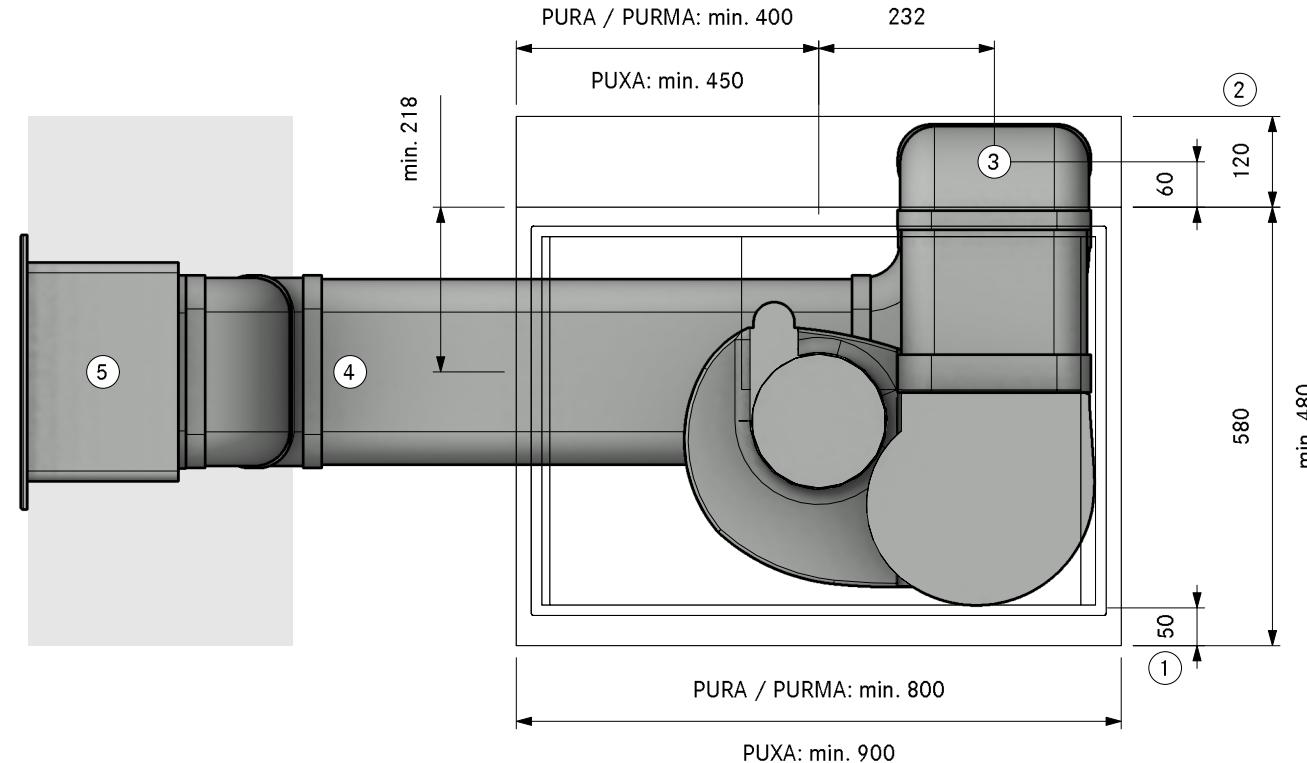

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required

3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required


5. Hole size 310 x 155mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30430  
(X/M)Pure Floor left swan neck UEBF  
SA

Version, 1.0

**BORA**

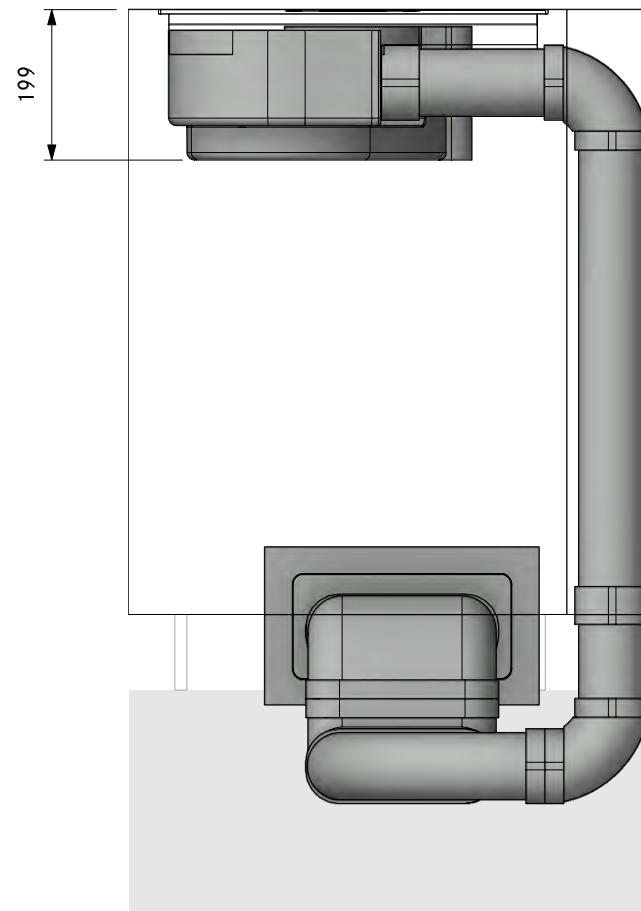

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA30430  
(X/M)Pure Floor left swan neck UEBF

LAYOUT FA


Version, 1.0

**BORA**

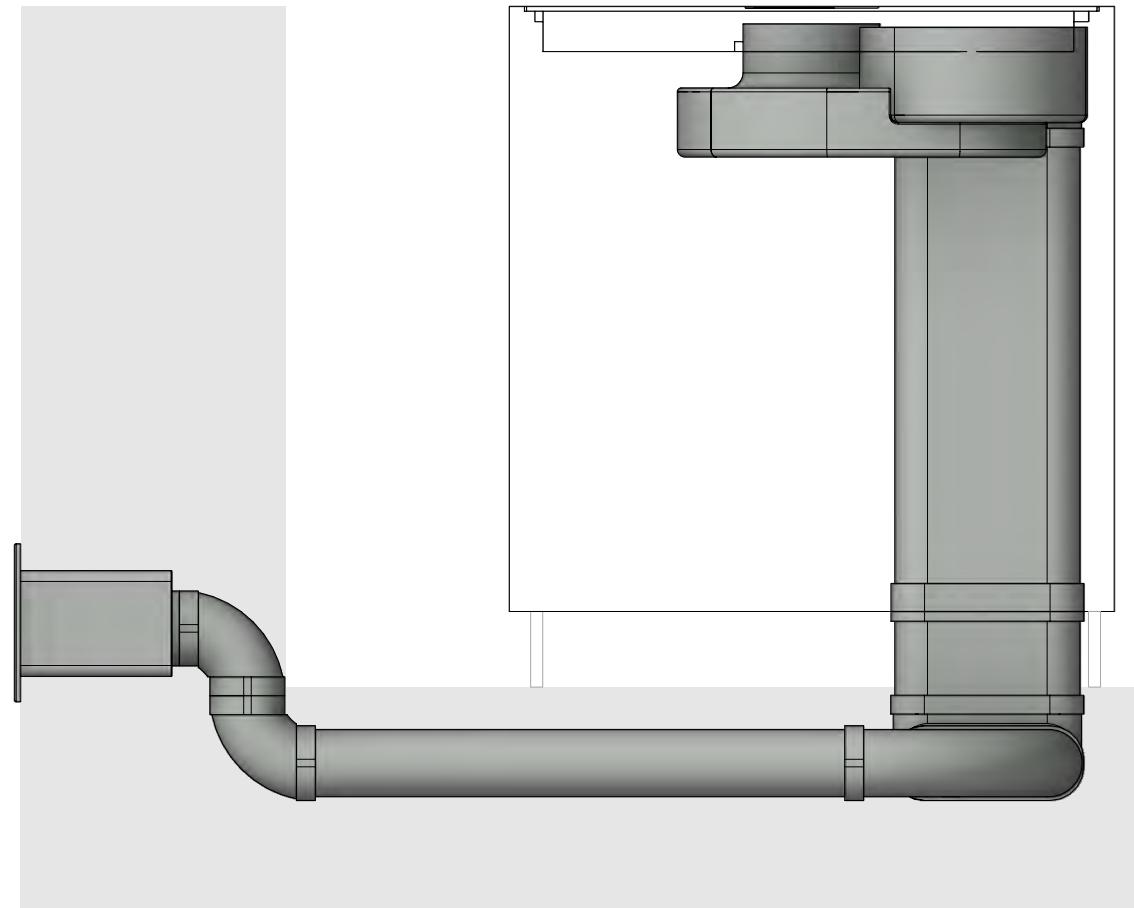

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

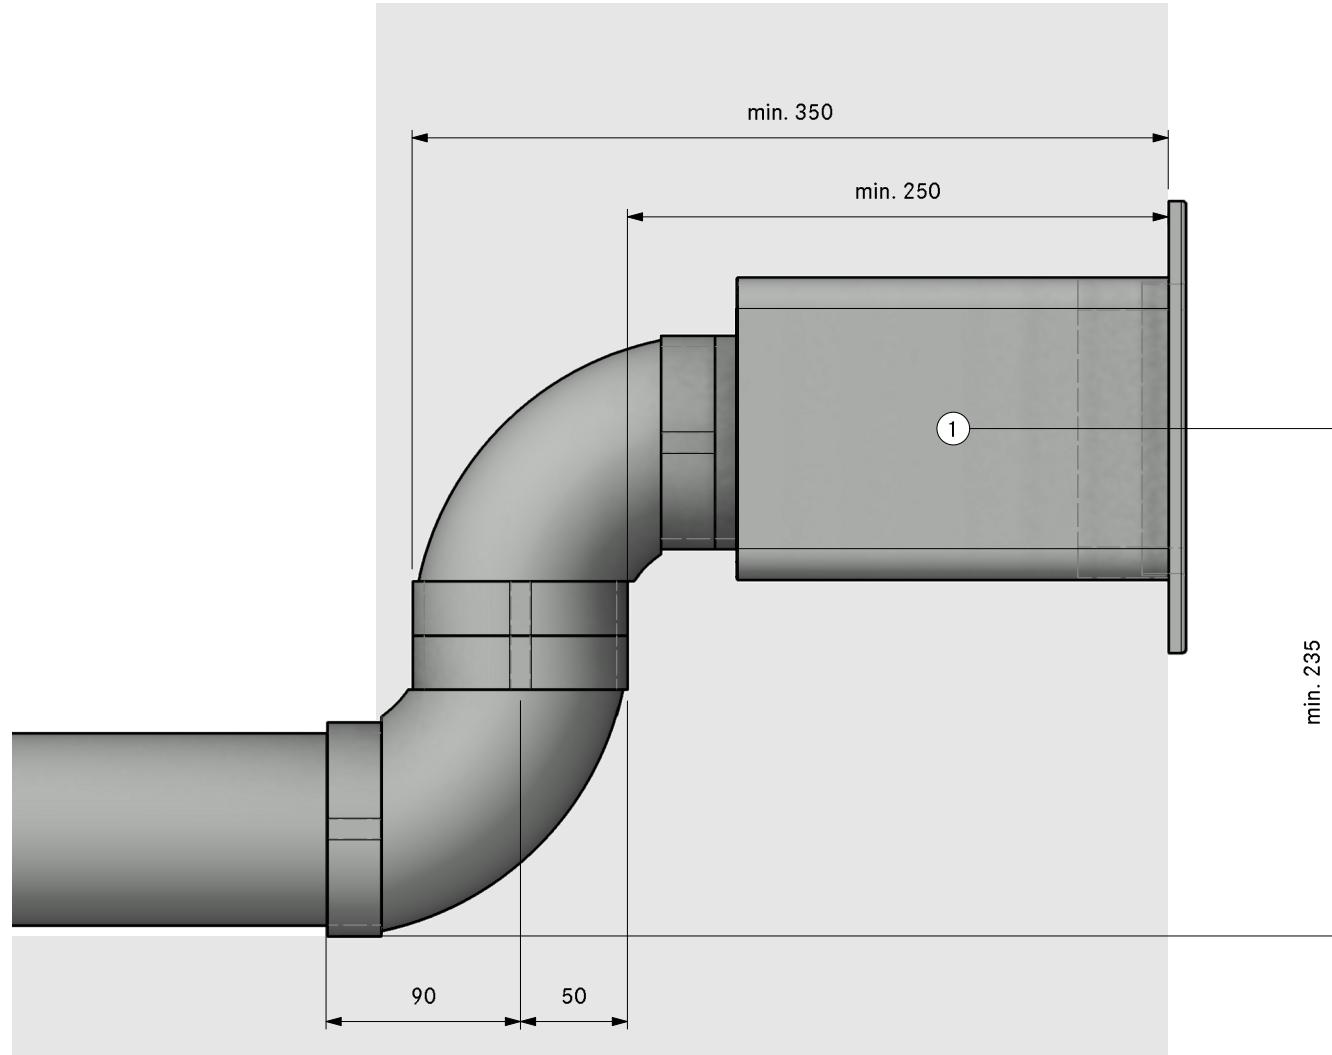

1. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA30440  
(X/M)Pure Floor left swan neck UEBR

LAYOUT 3D

Version, 1.0

**BORA**

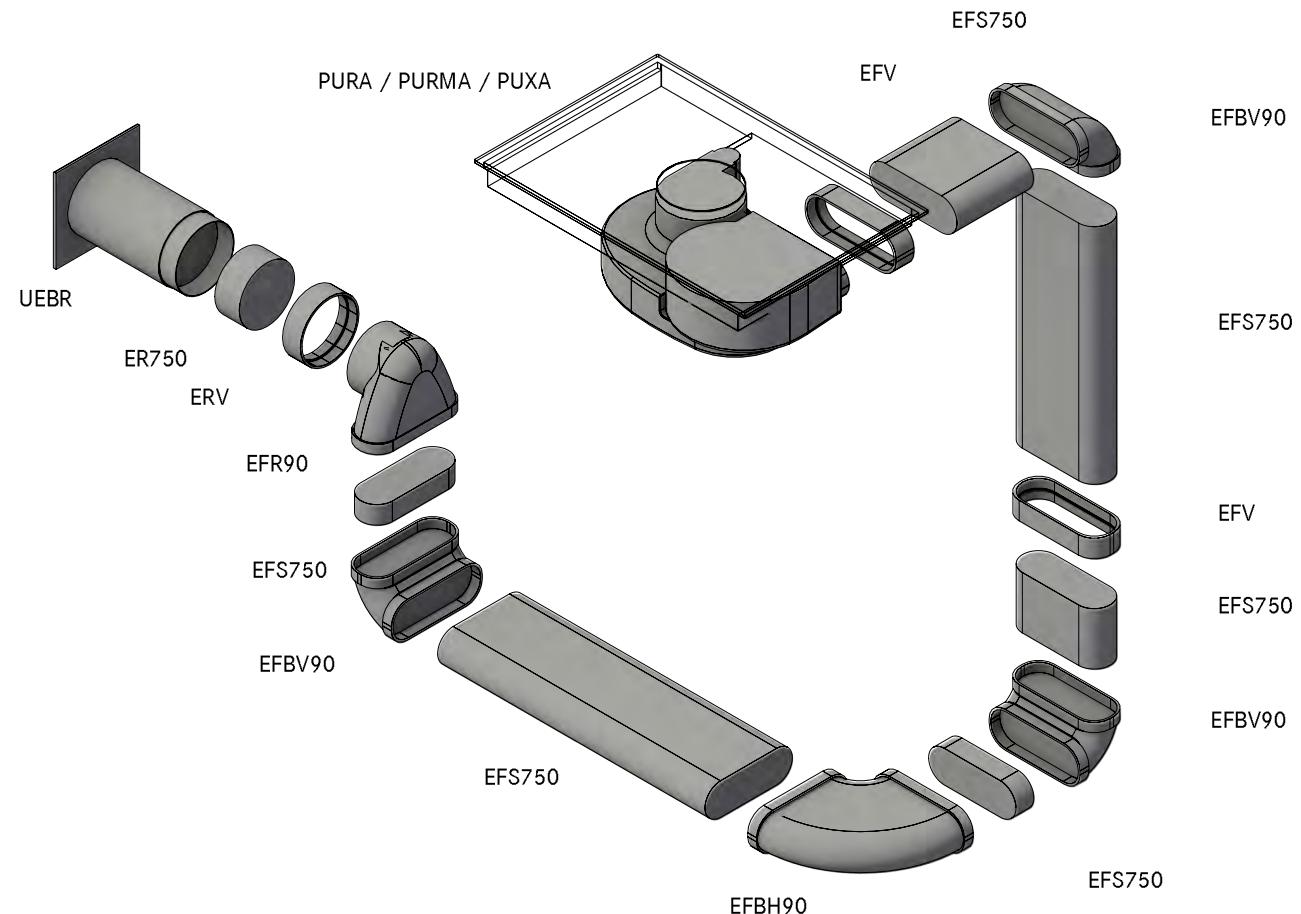


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
3	EFBV90 90° bend flat vertical
1	EFR90 transition flat round 90°
2	EFV duct connection flat
1	ERV duct connection round
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

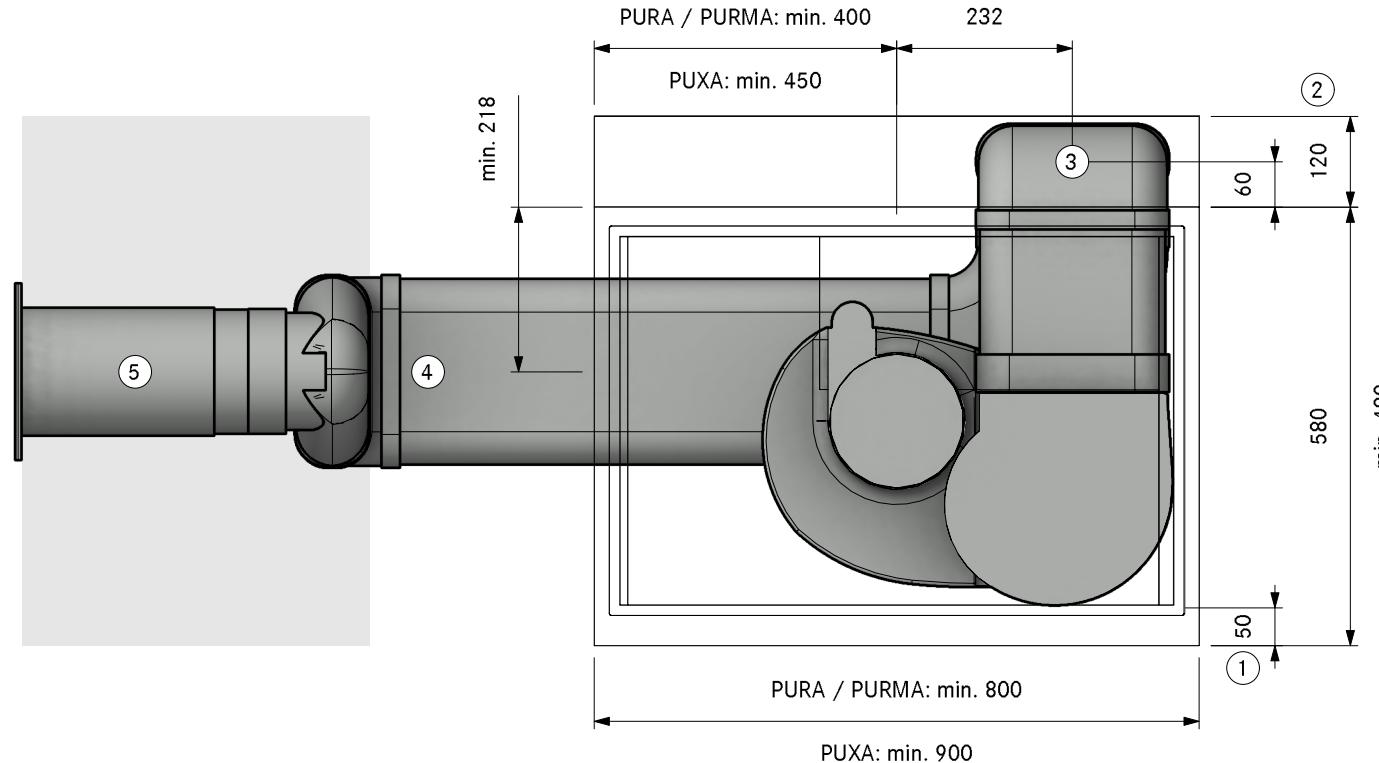


1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Connection point Ecotube
4. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30440  
(X/M)Pure Floor left swan neck UEBR  
SA

Version, 1.0

**BORA**

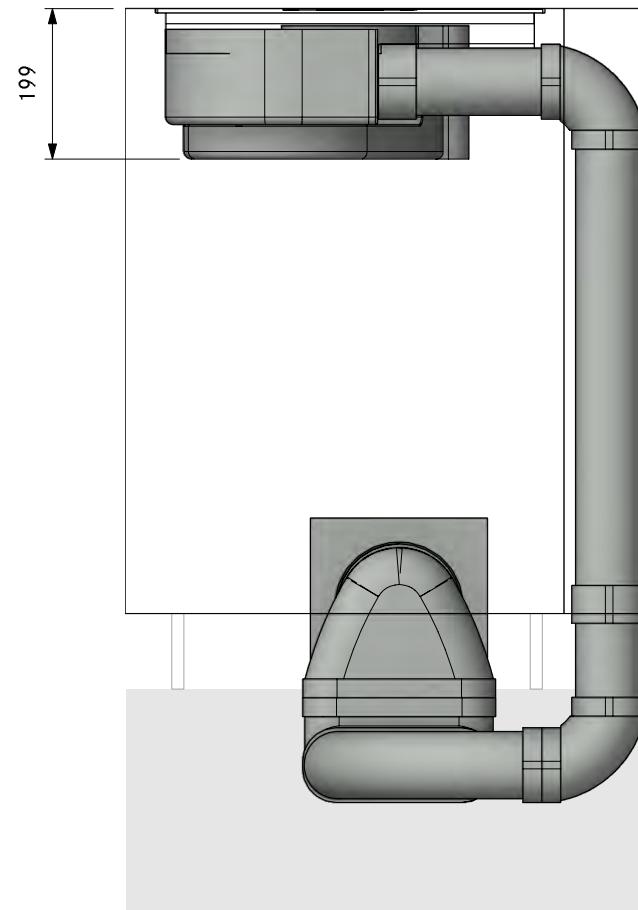

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA30440  
(X/M)Pure Floor left swan neck UEBR

FA


Version, 1.0

**BORA**

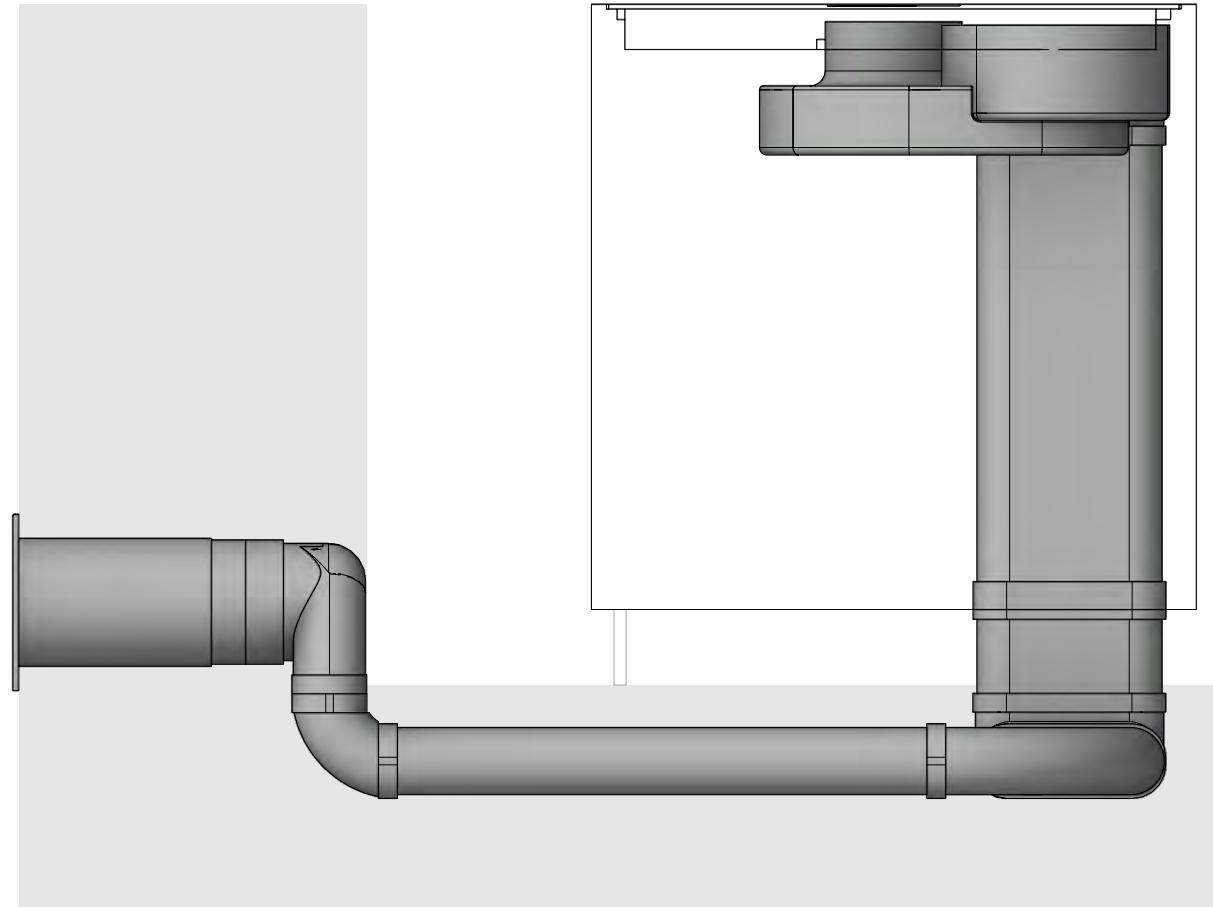

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

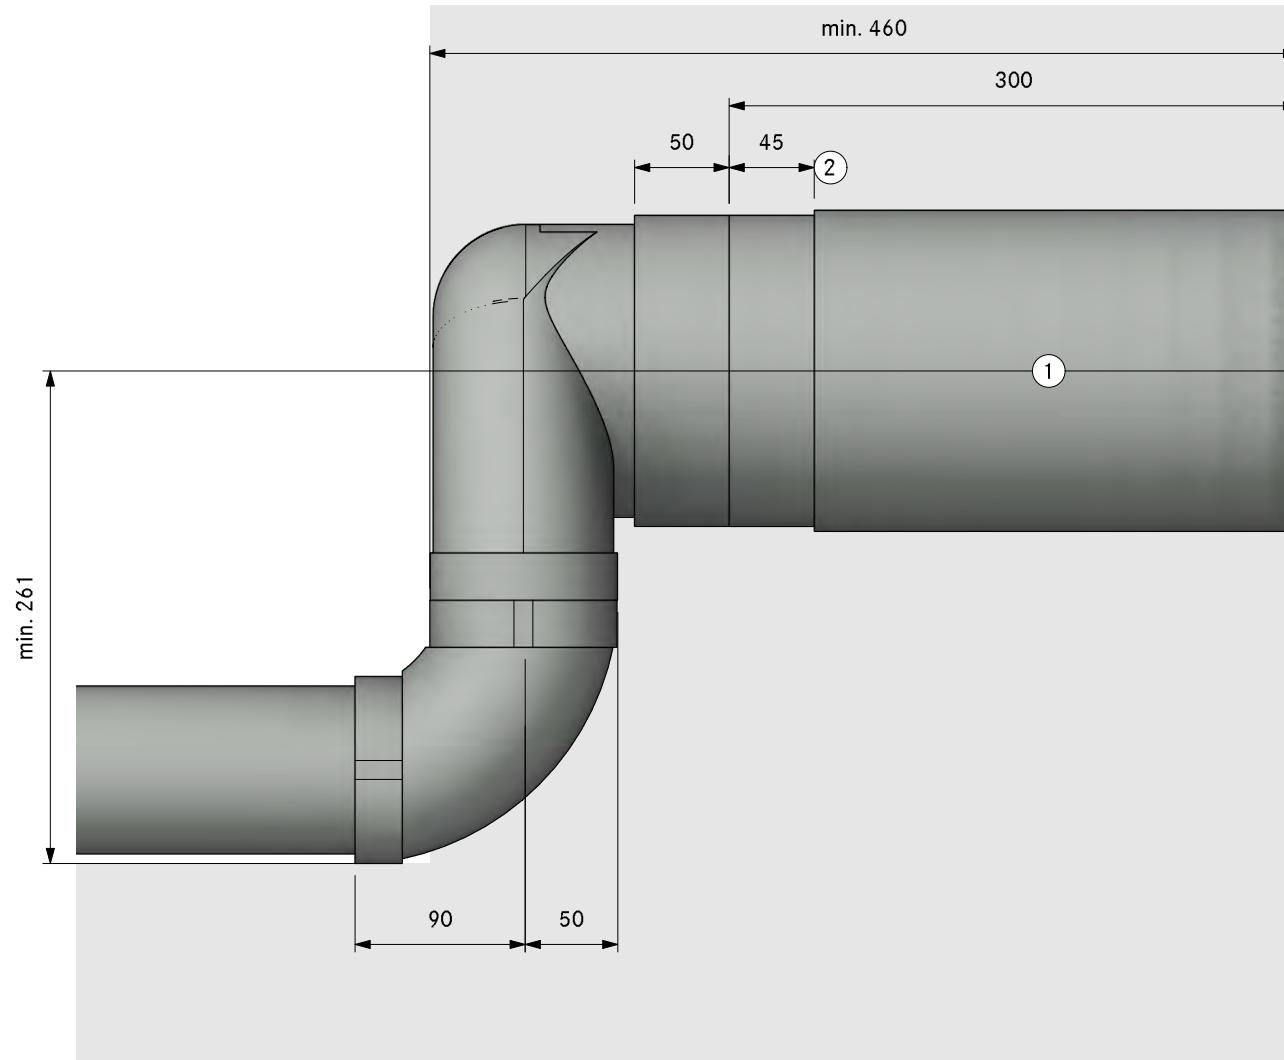

1. Hole size min. Ø 180mm.  
Wall vent must be able to fully open for air to extract
2. Bushing length 45mm (can be shortened by 20mm)

# Cellar


direction of the ducting to the back . . . . .	192
direction of the ducting to the right . . . . .	204
direction of the ducting to the front. . . . .	216
direction of the ducting to the left. . . . .	228

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40110  
(X/M)Pure Cellar back UEBF

LAYOUT 3D HK

PURA / PURMA / PUXA

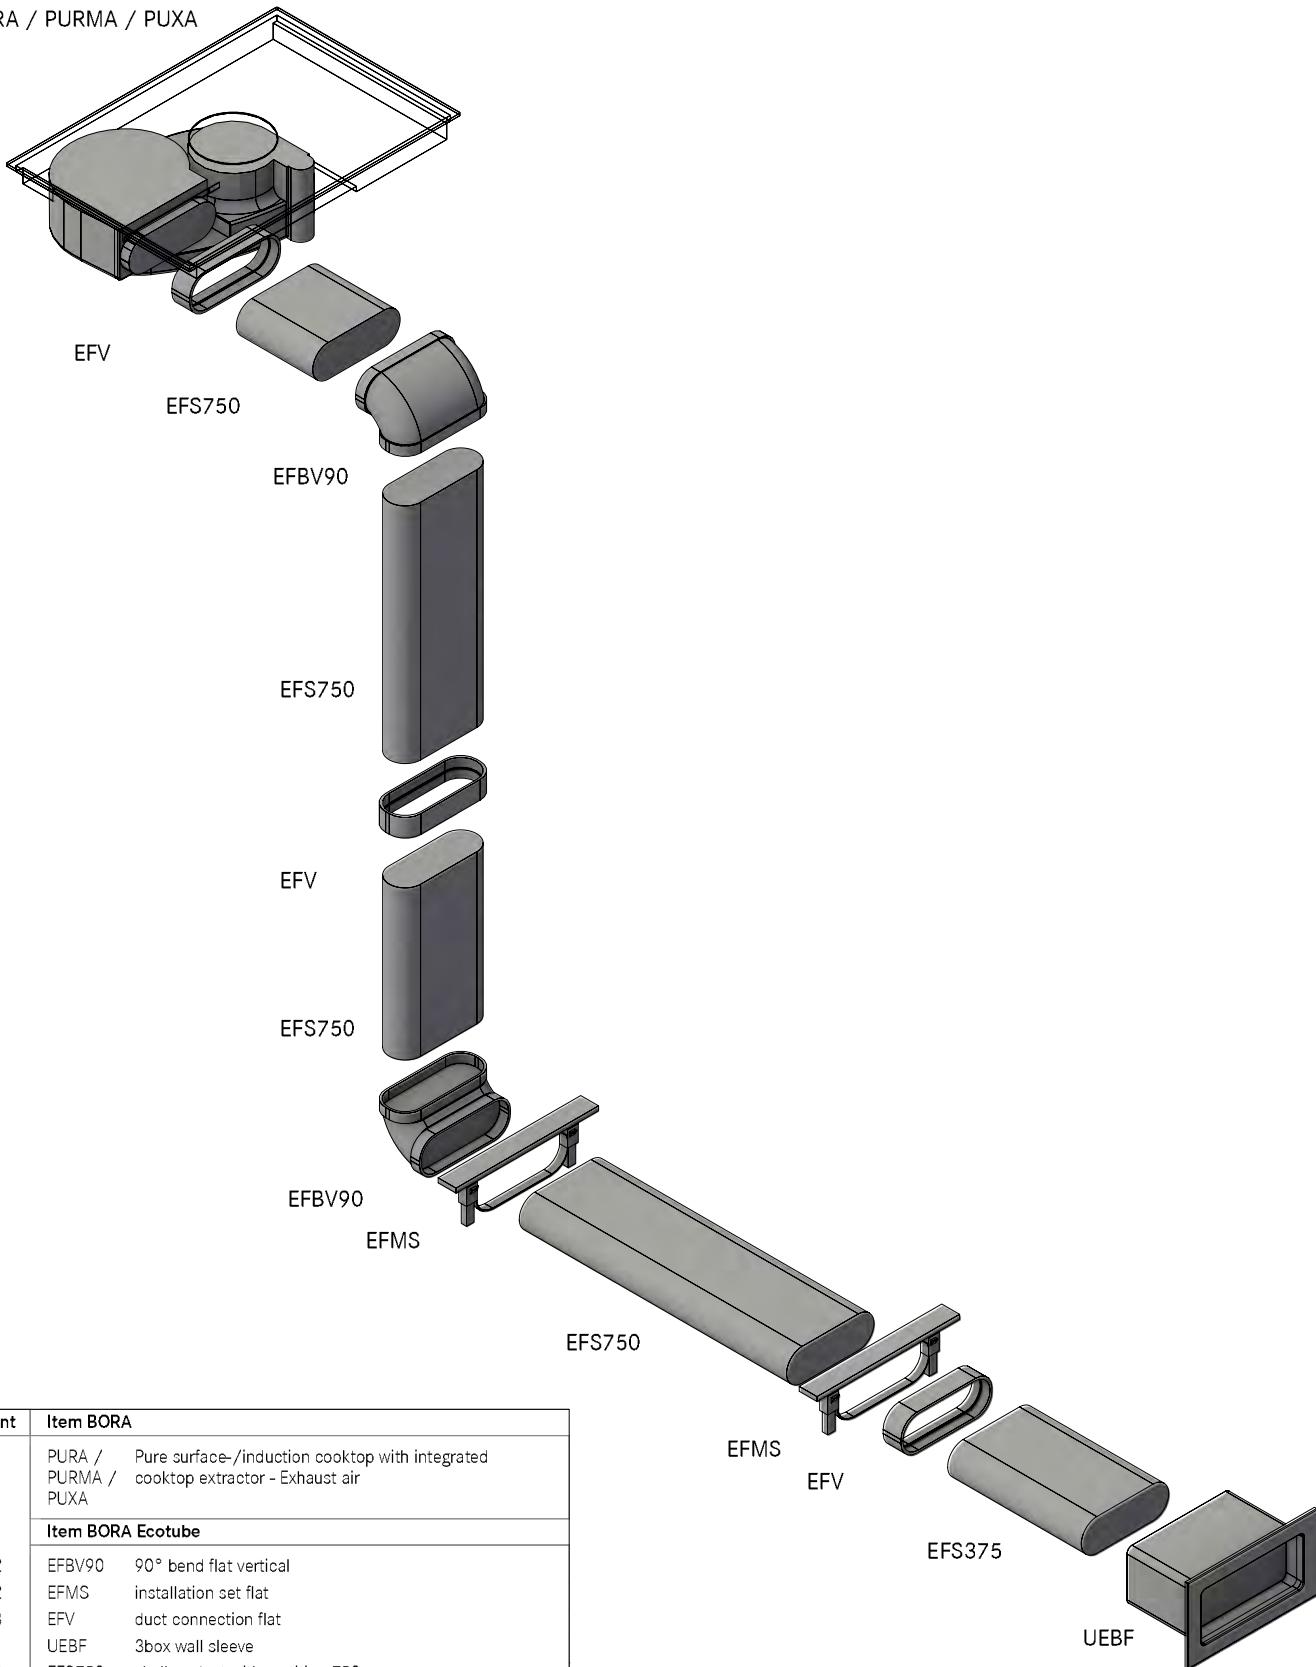

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm



*Please check for accuracy. Seals included. Are optically not displayed.*

MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40110  
(X/M)Pure Cellar back UEBF

LAYOUT GR HK

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

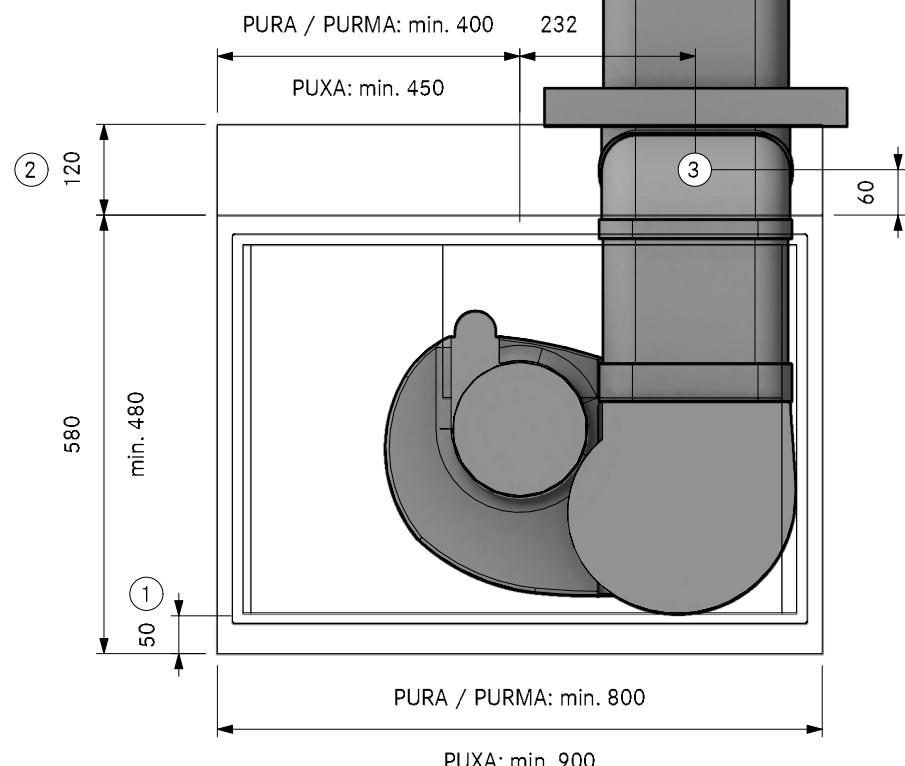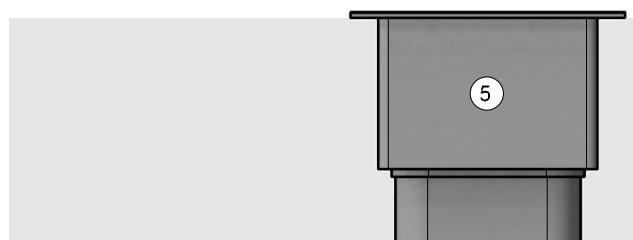


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA40110  
(X/M)Pure Cellar back UEBF

Version, 1.0

**BORA**

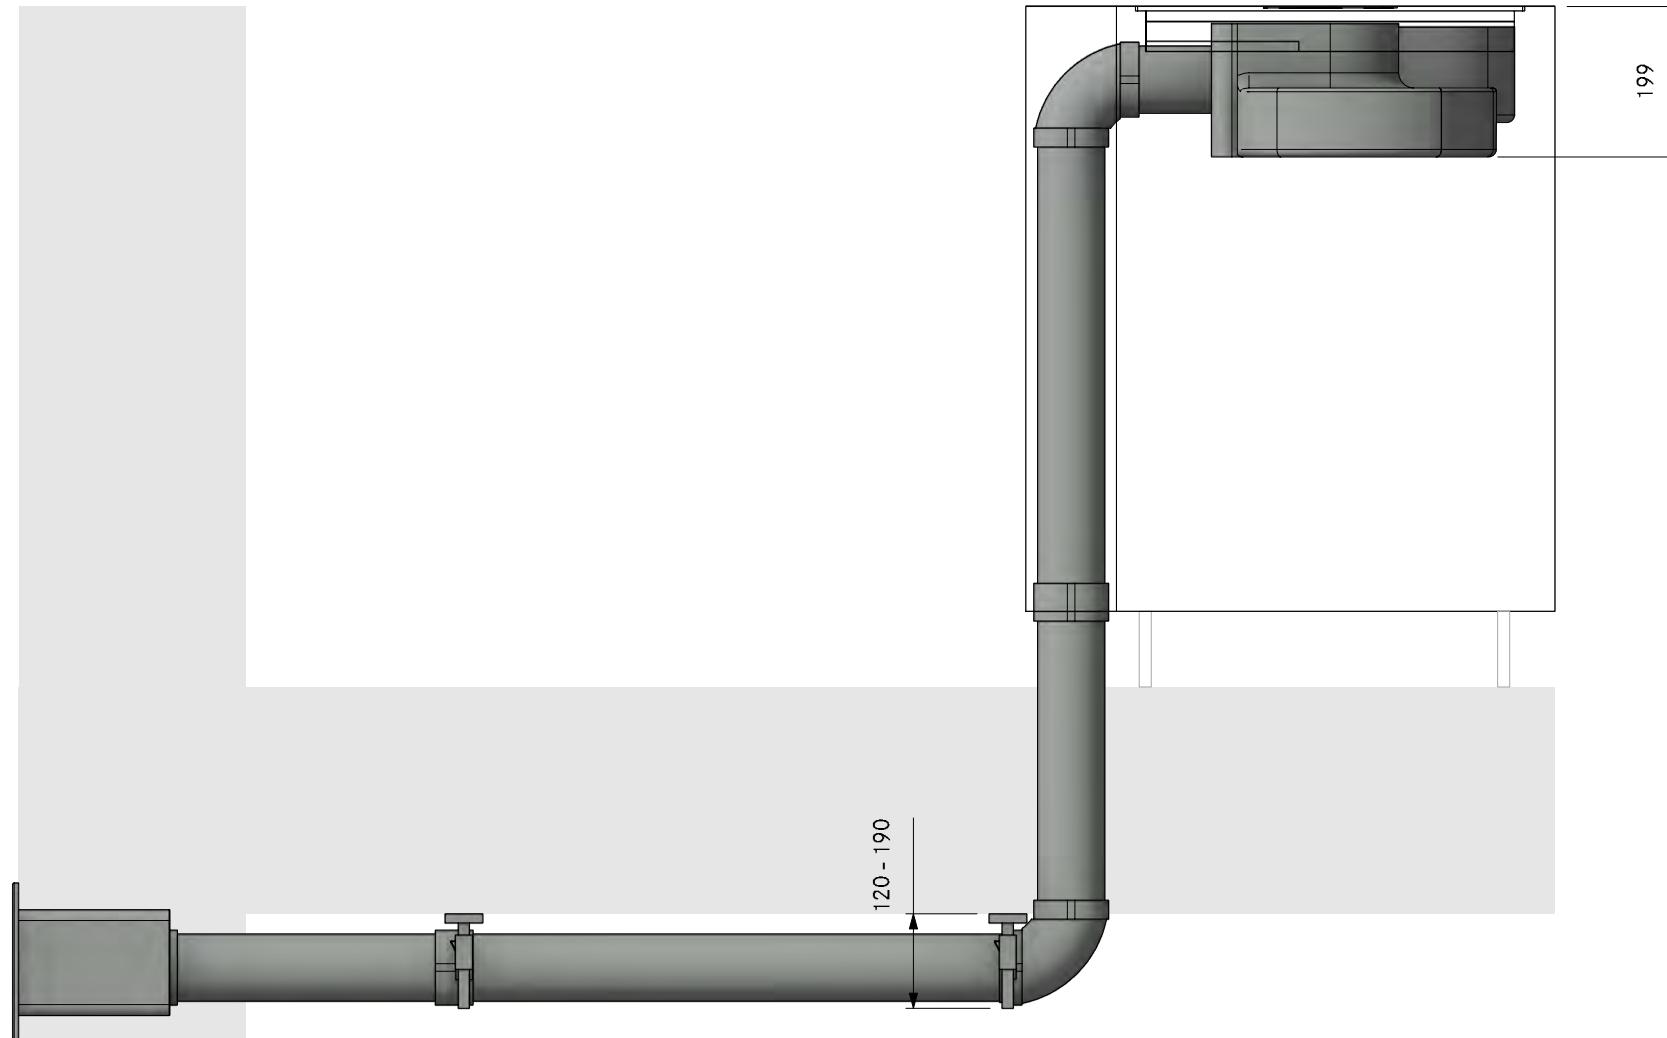

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA40110  
(X/M)Pure Cellar back UEBF

Version, 1.0

**BORA**

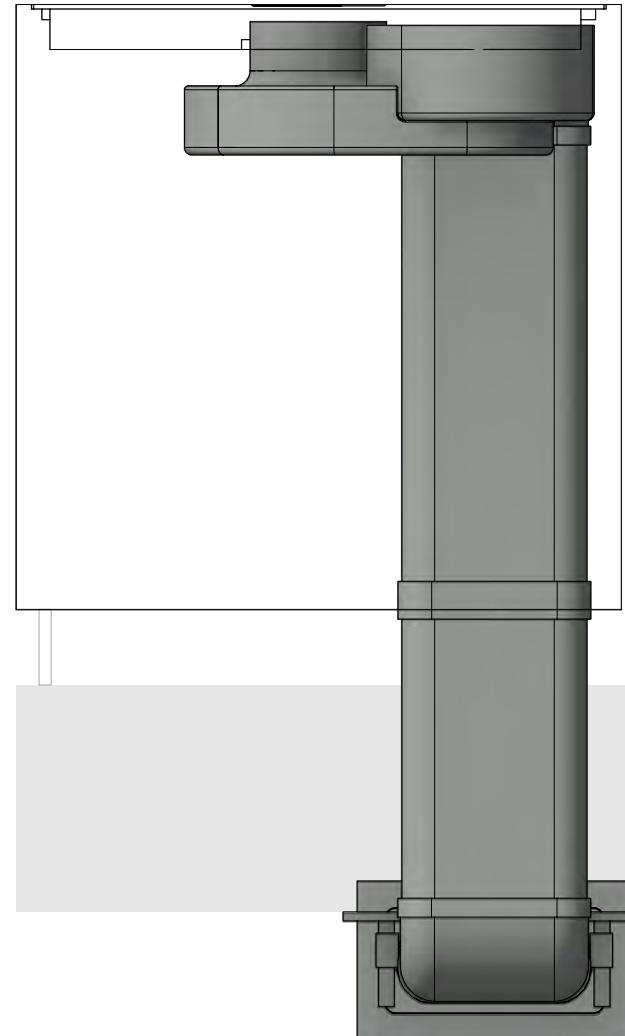

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40110  
(X/M)Pure Cellar back UEBF

LAYOUT Detail

Version, 1.0

**BORA**

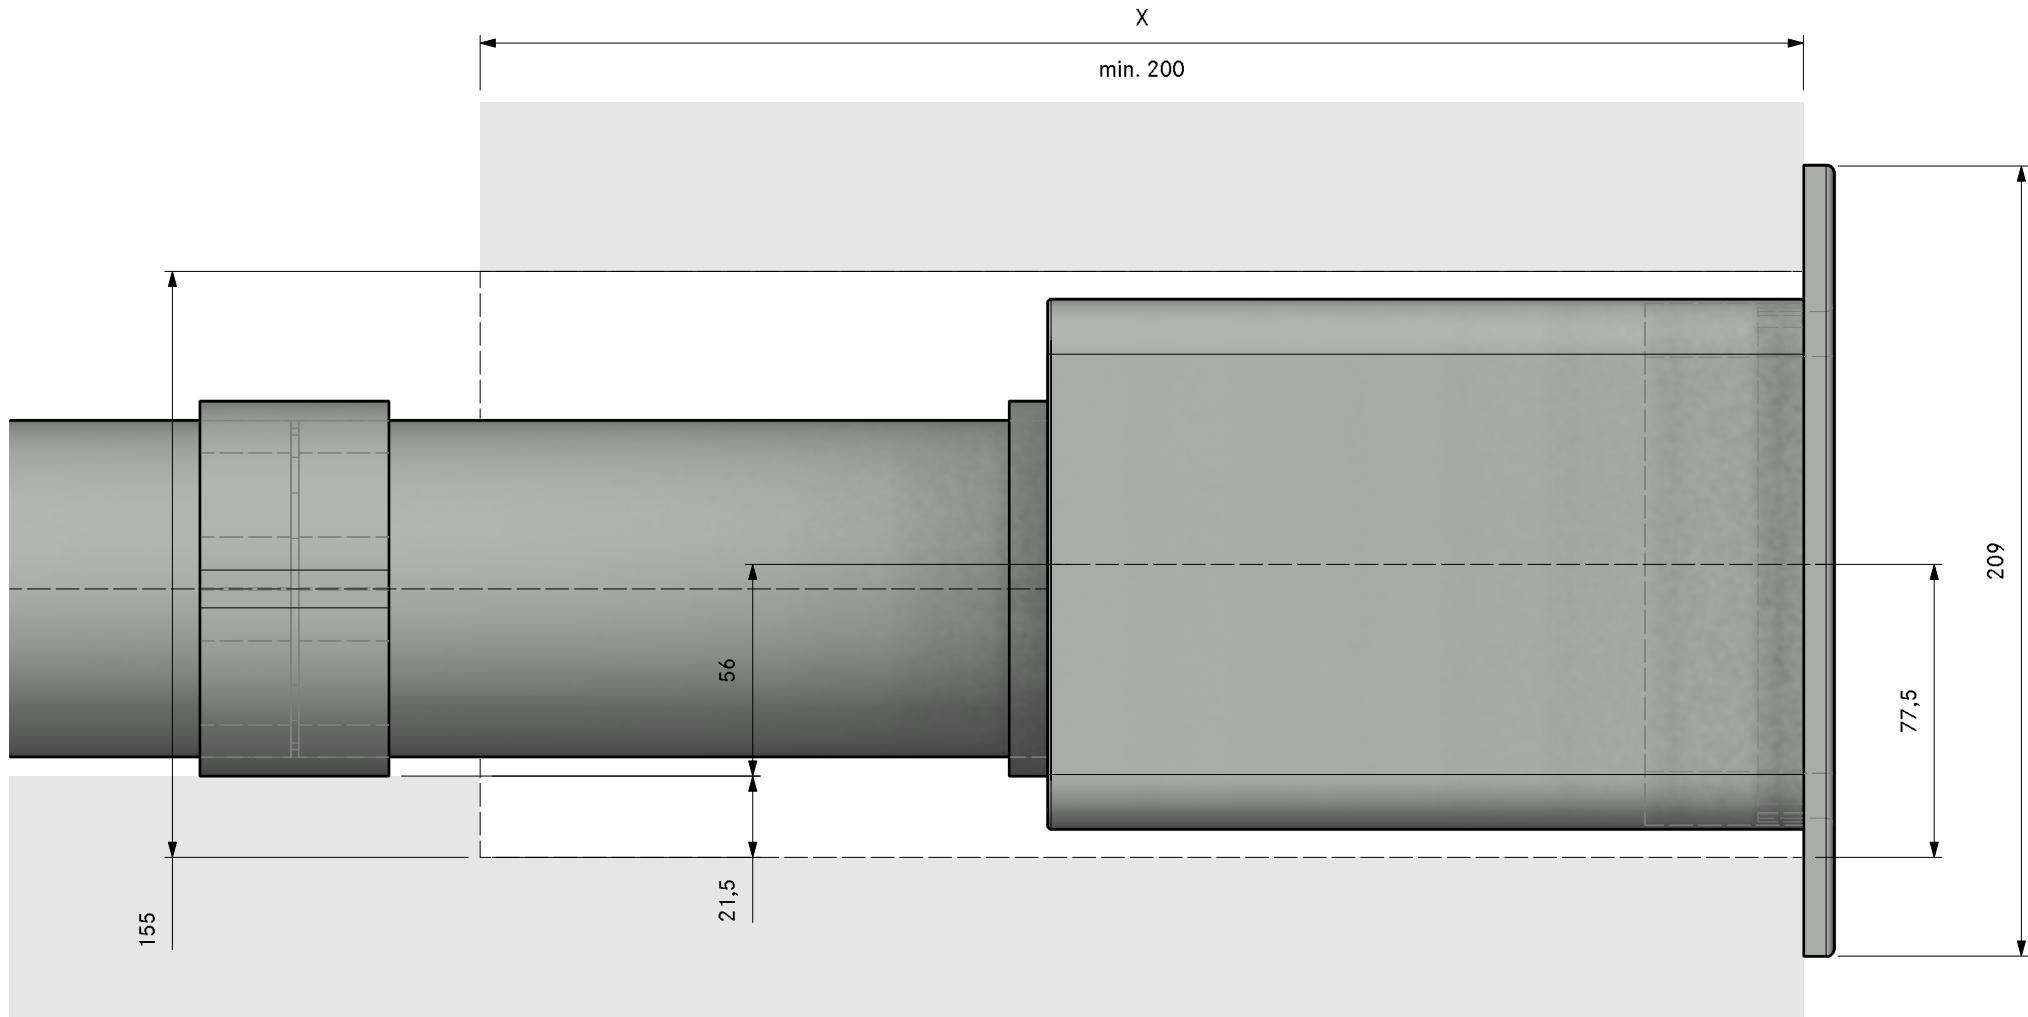

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION  
LAYOUT

PA40120  
(X/M)Pure Cellar back UEBR  
3D HK

PURA / PURMA / PUXA

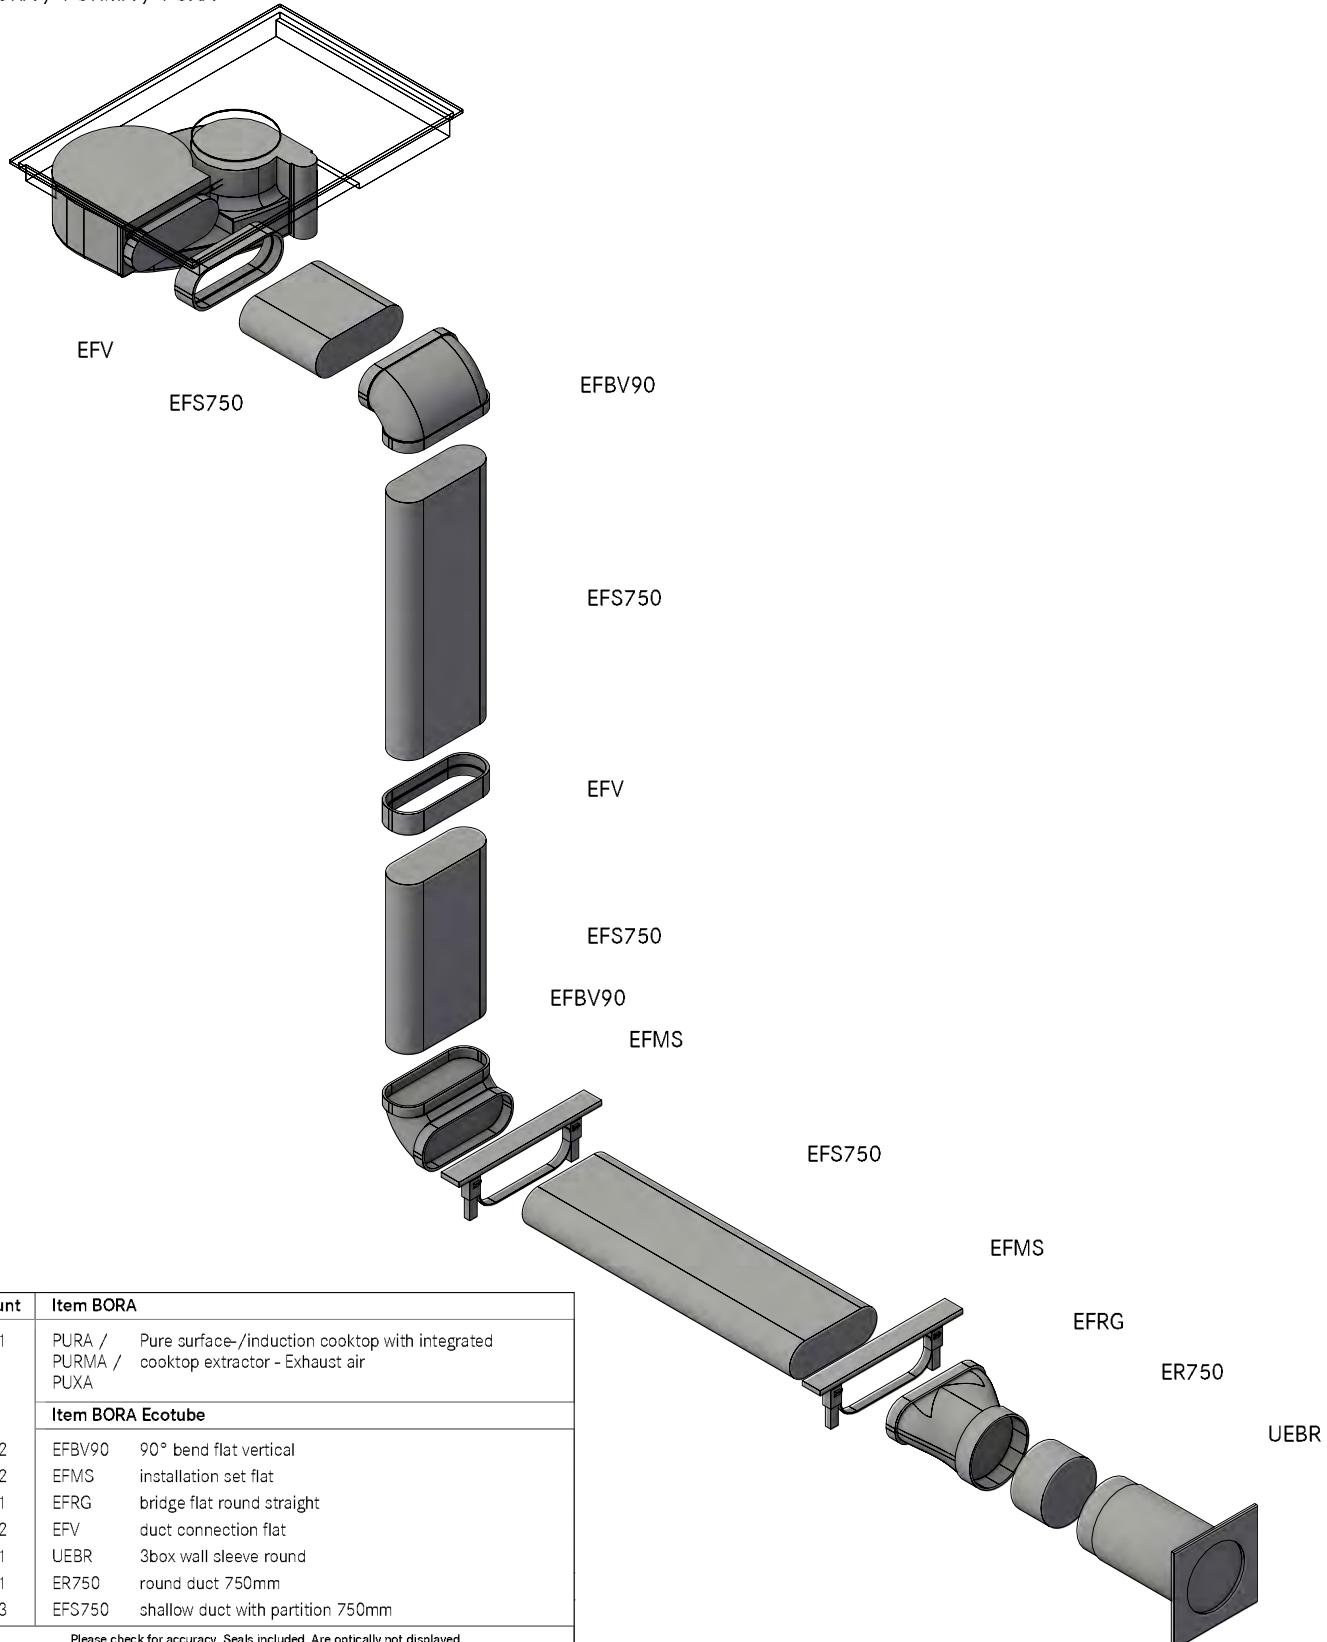


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40120  
(X/M)Pure Cellar back UEBR

LAYOUT GR HK

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

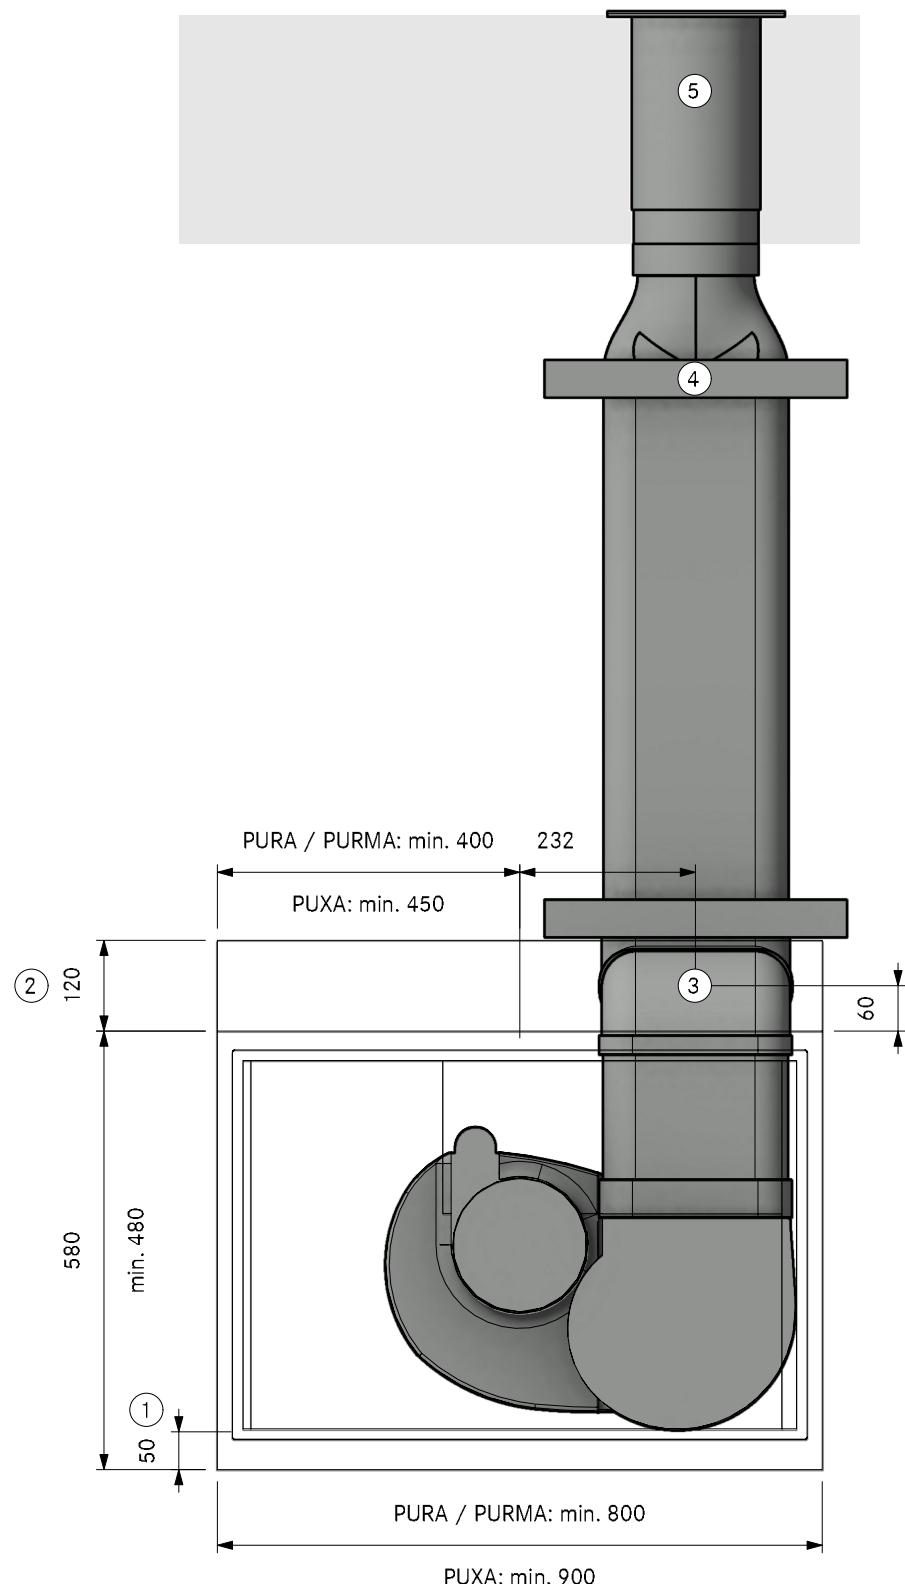


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40120  
(X/M)Pure Cellar back UEBR

LAYOUT SA

Version, 1.0

**BORA**

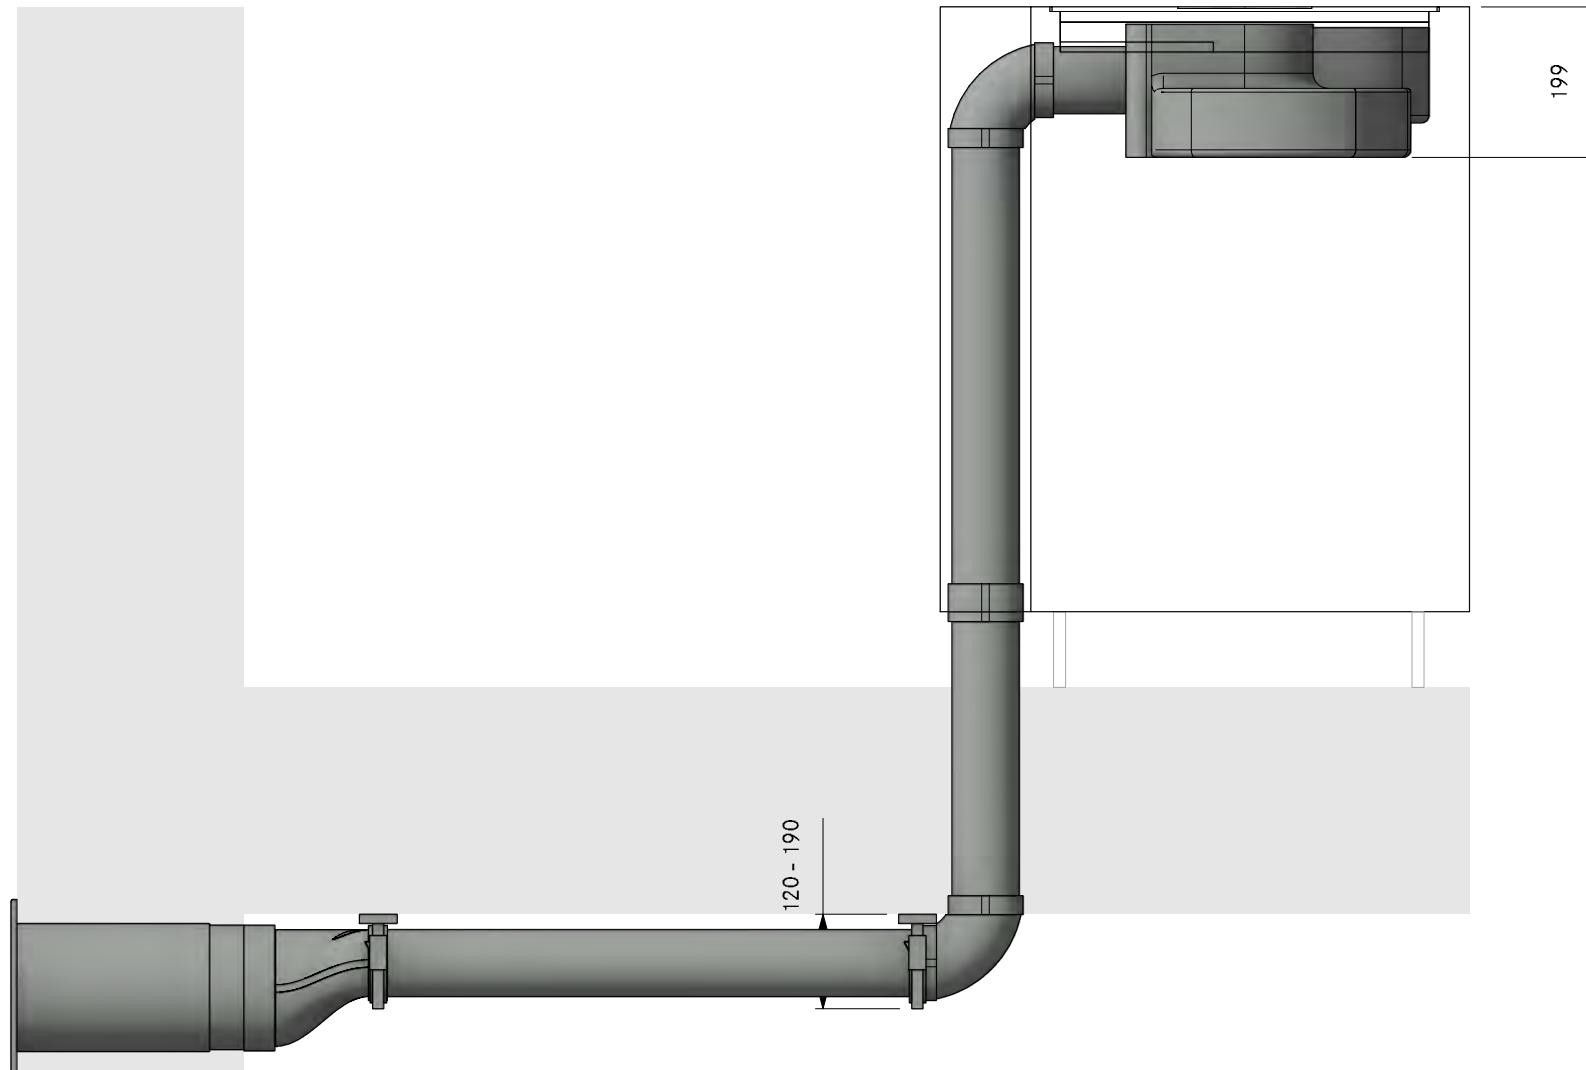

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40120  
(X/M)Pure Cellar back UEBR

LAYOUT FA

Version, 1.0

**BORA**

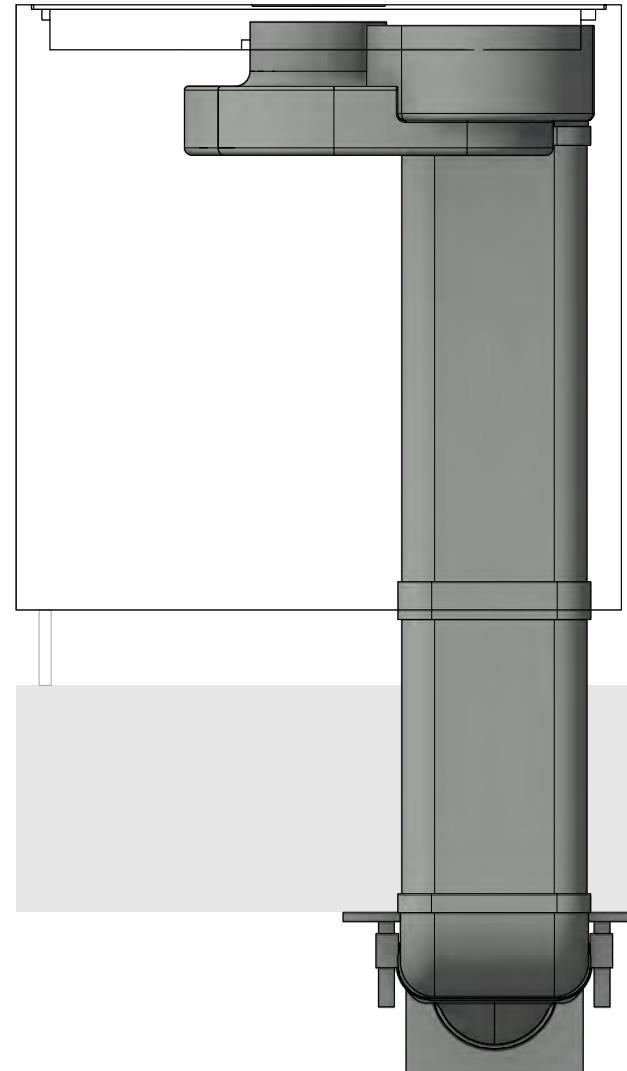


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

Page 4

## LAYOUT Detail

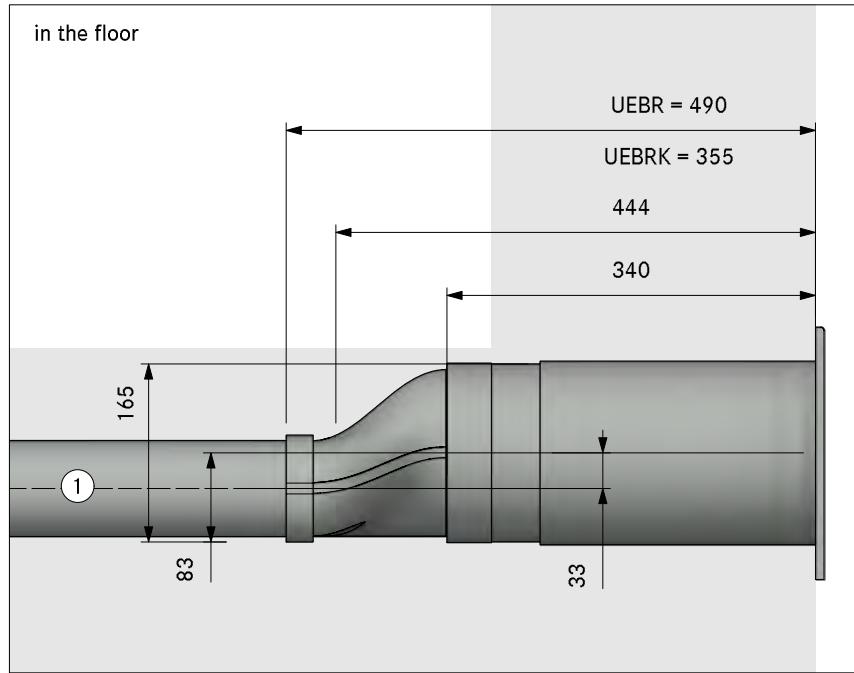


in the plinth area

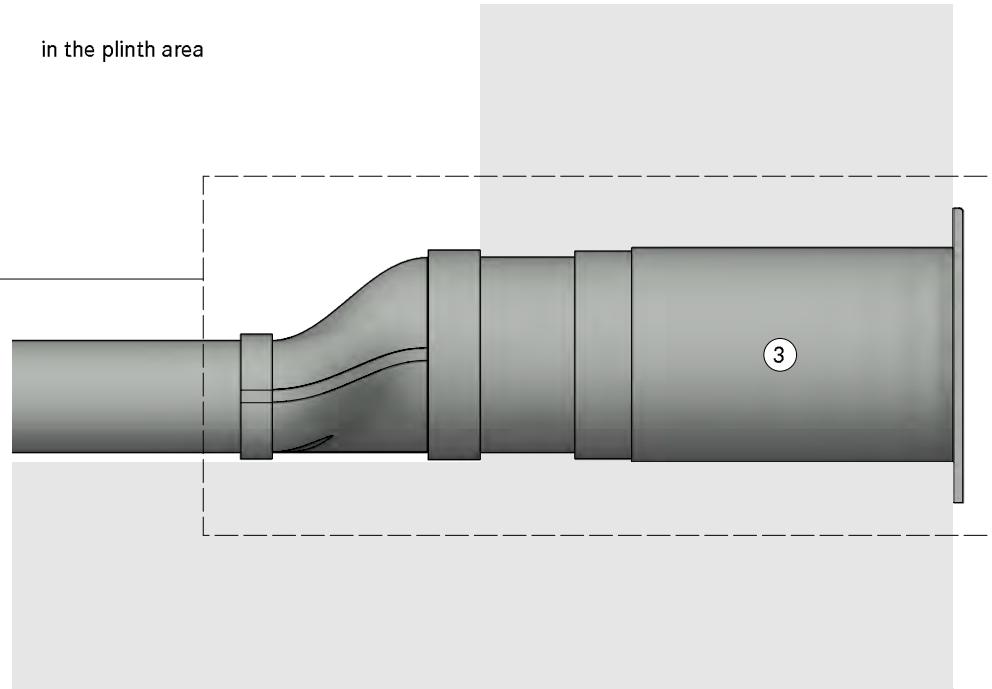


1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN 18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract


in the cellar

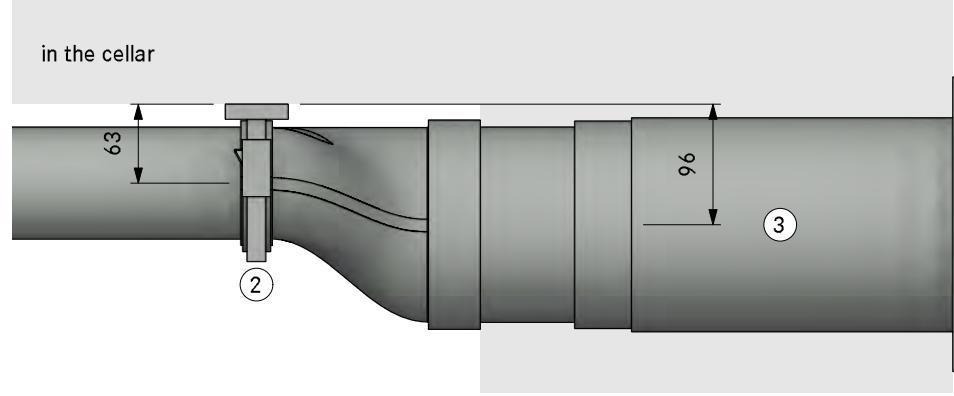



Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.	

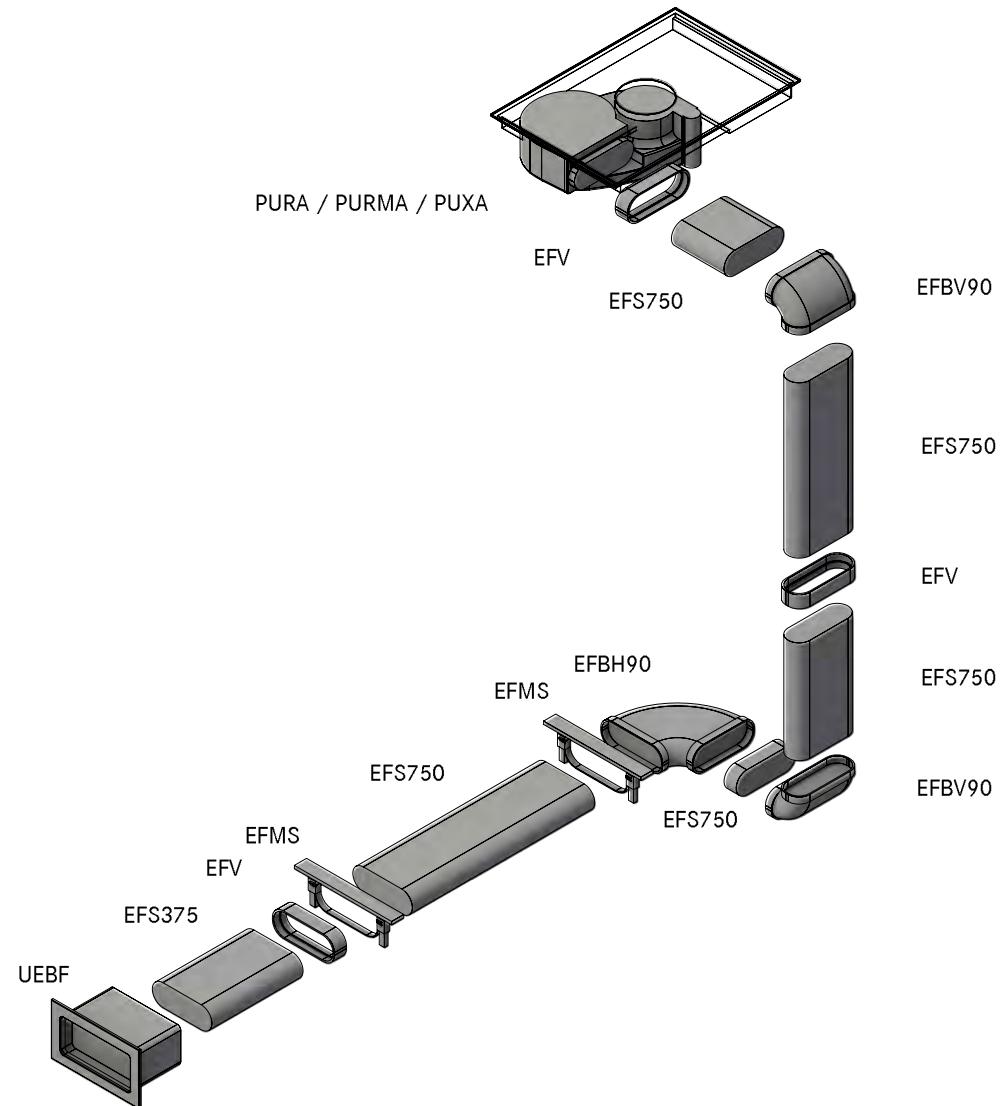

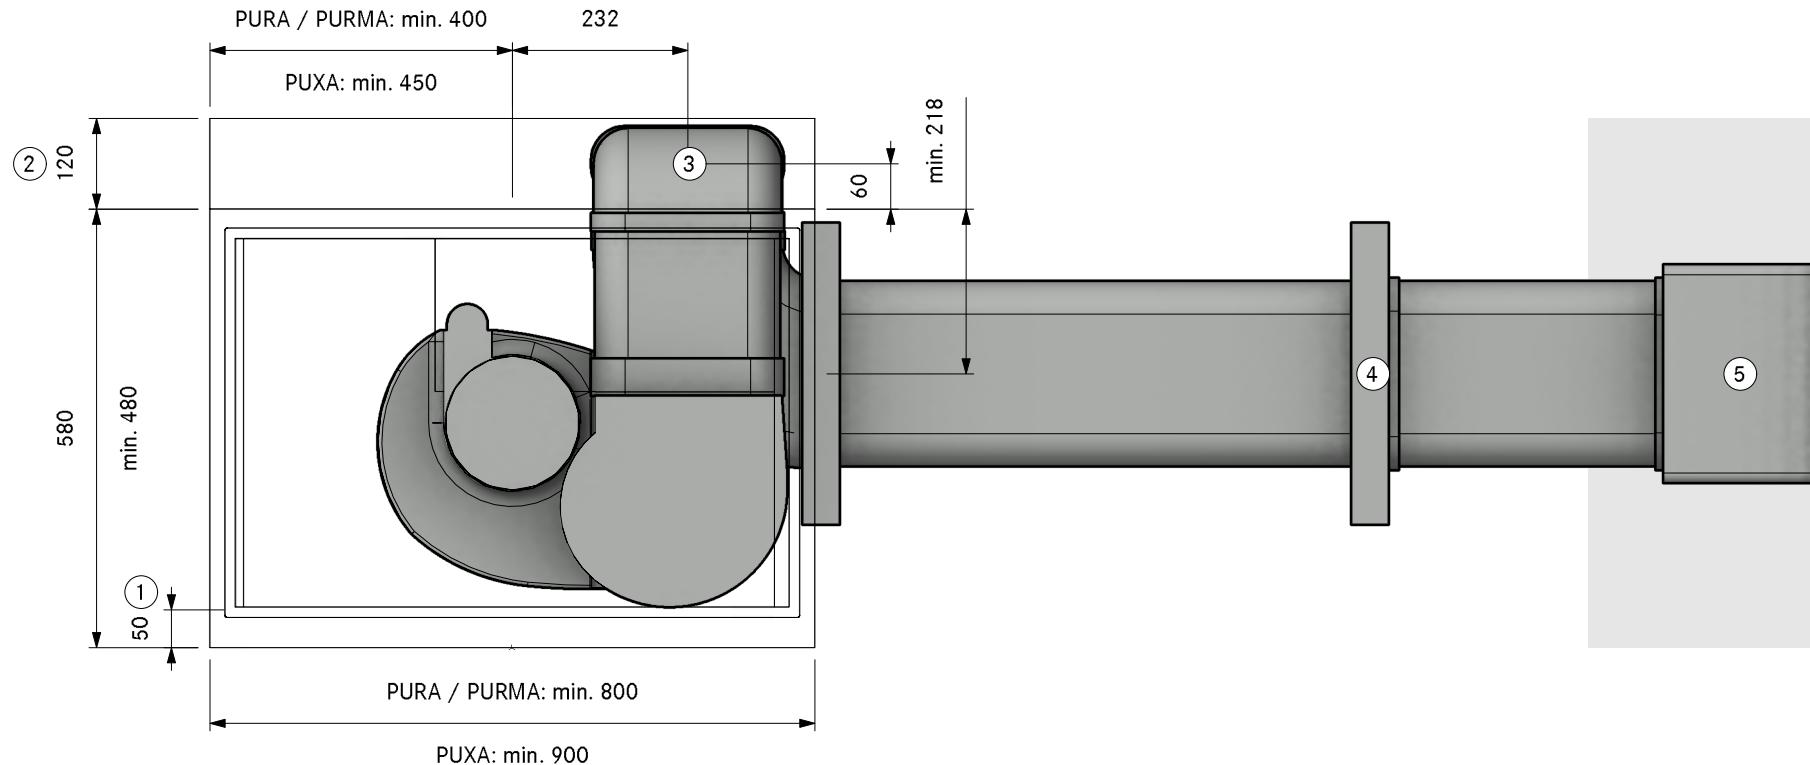


1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA40210  
(X/M)Pure Cellar right UEBF  
SA

Version, 1.0

**BORA**

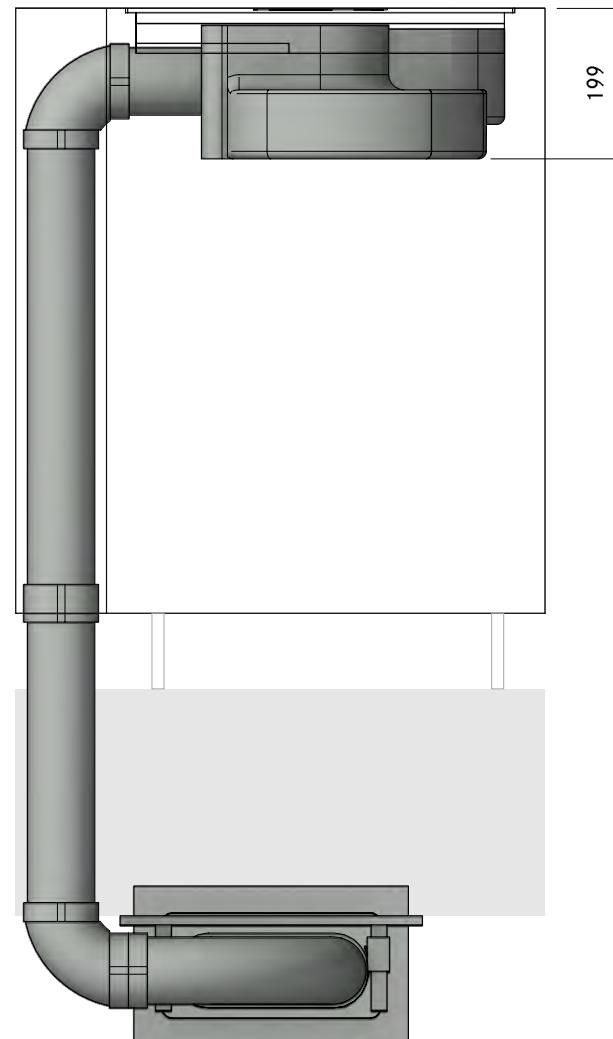

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40210  
(X/M)Pure Cellar right UEBF

LAYOUT FA


Version, 1.0

**BORA**

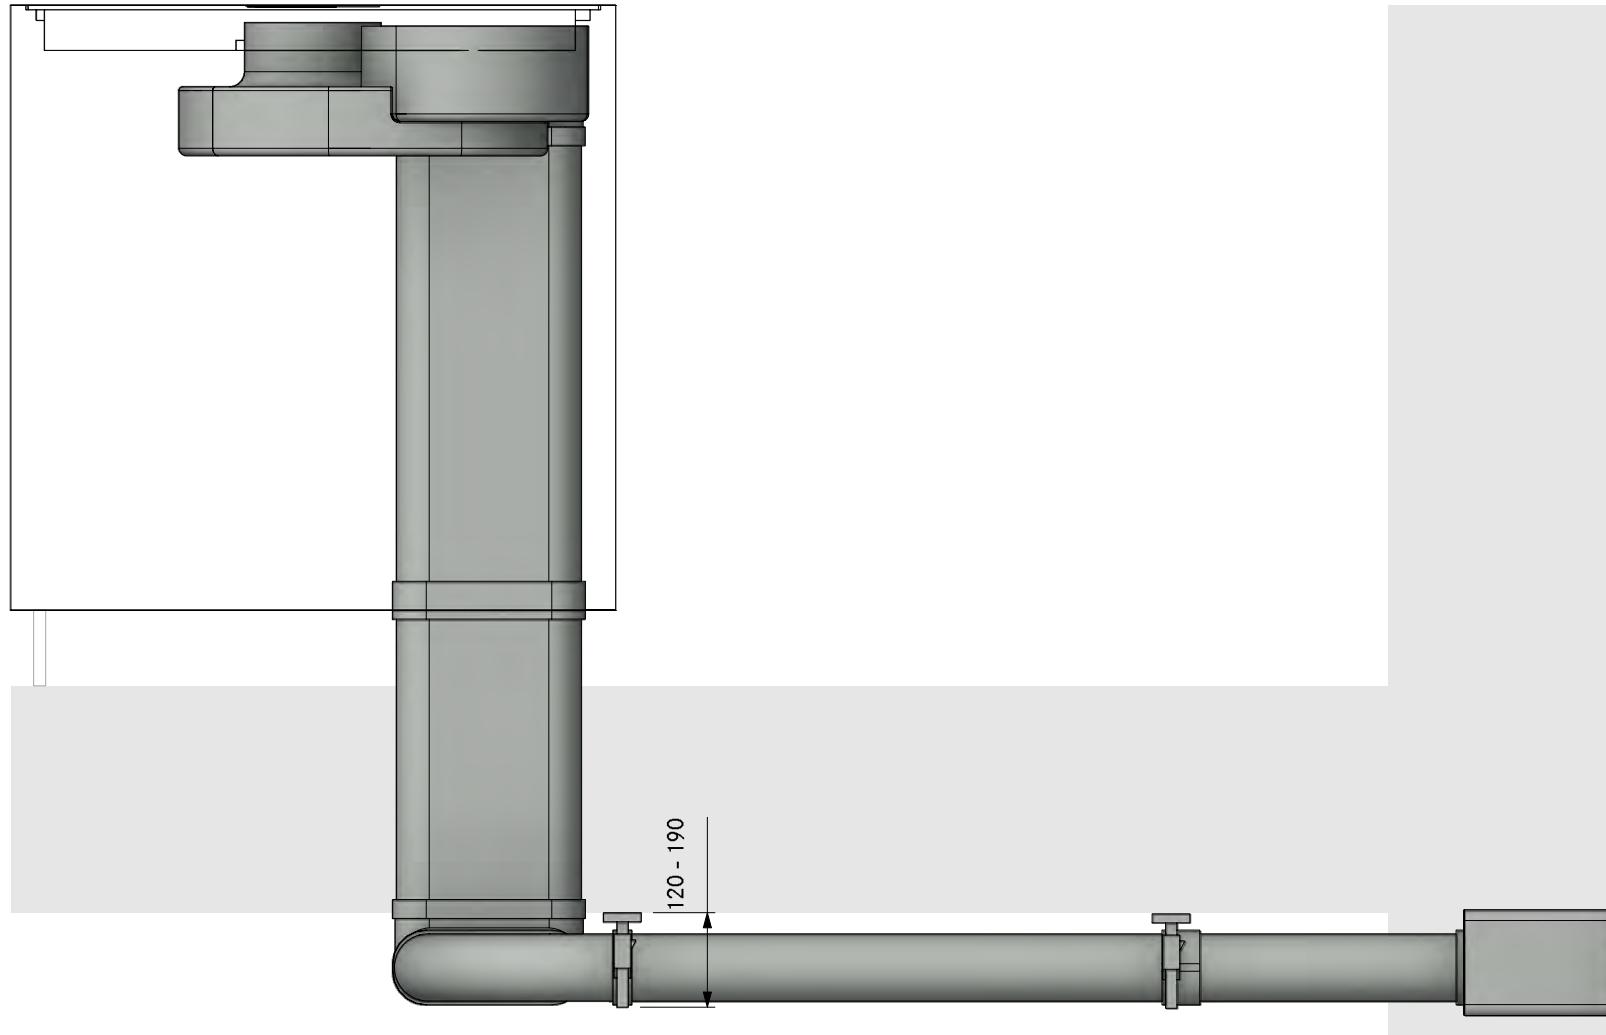

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

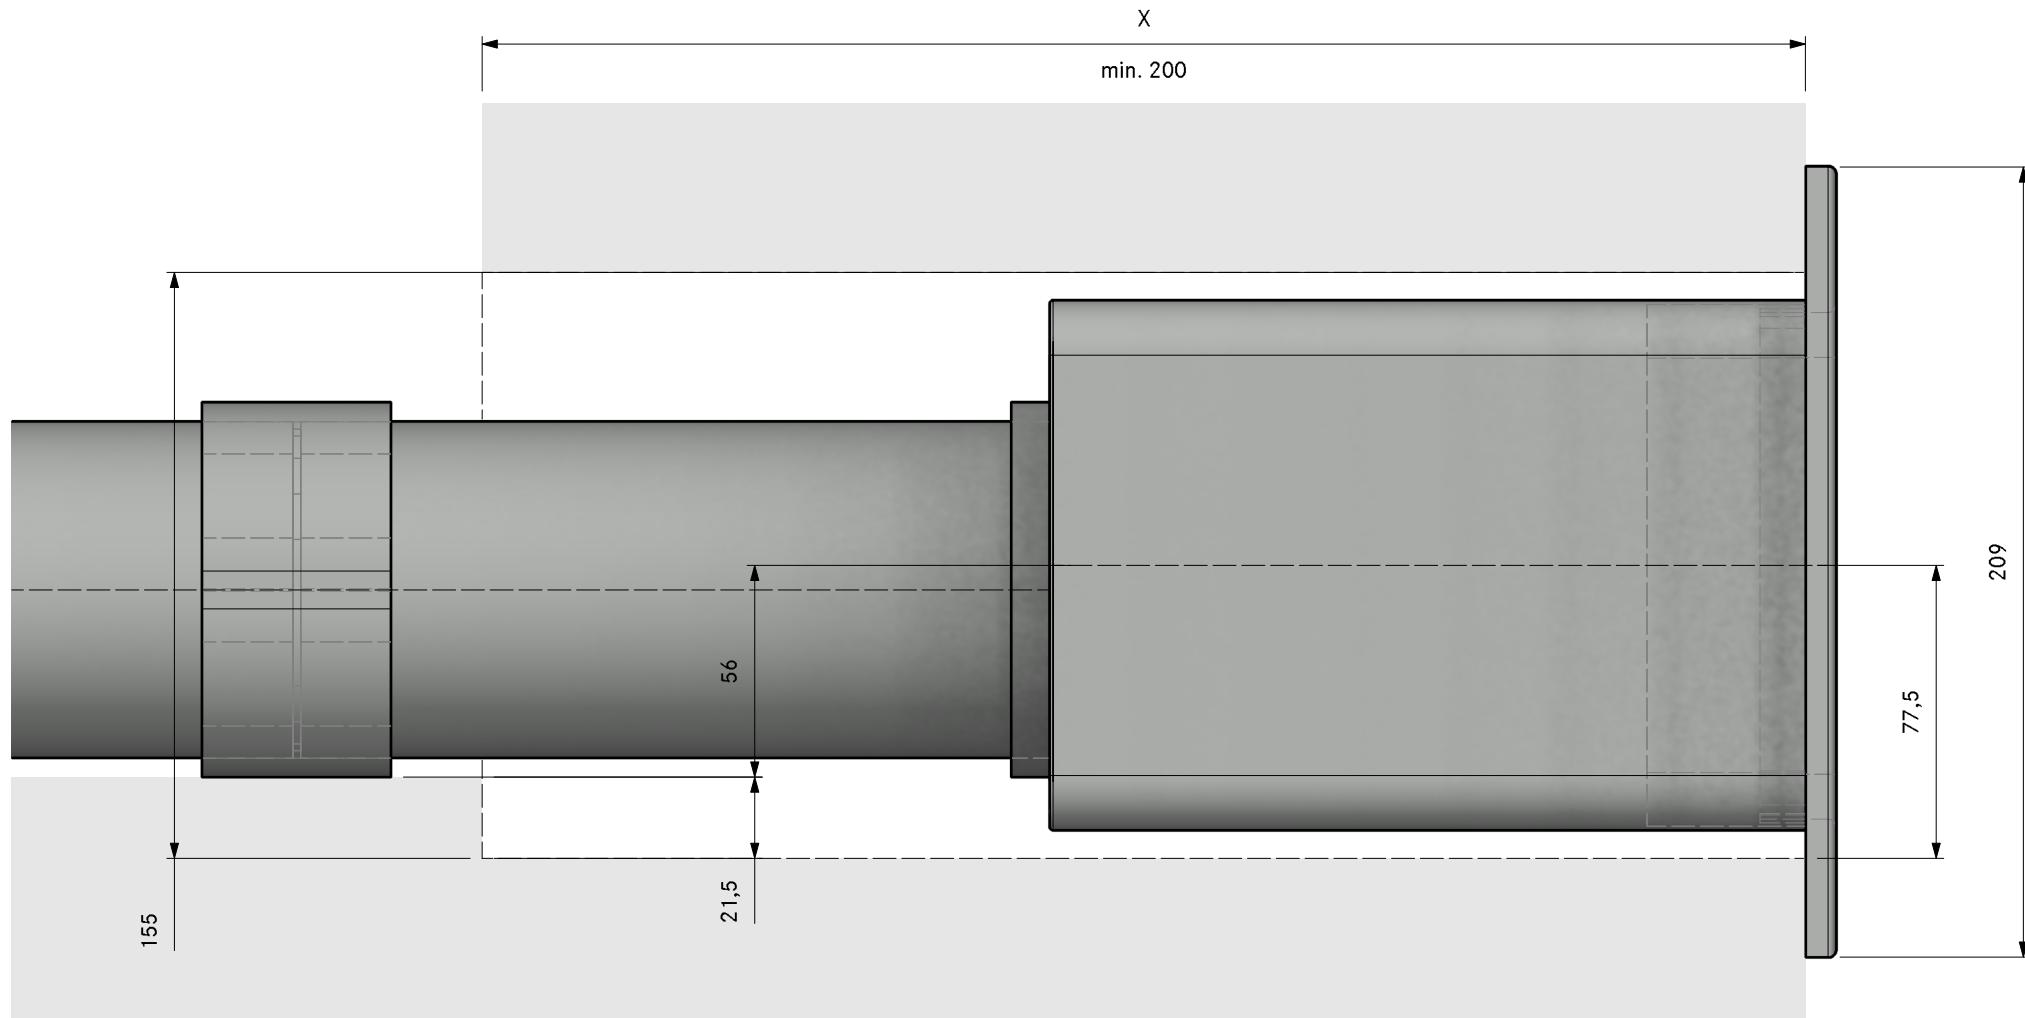




Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
1	EFRG bridge flat round straight
2	EFV duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

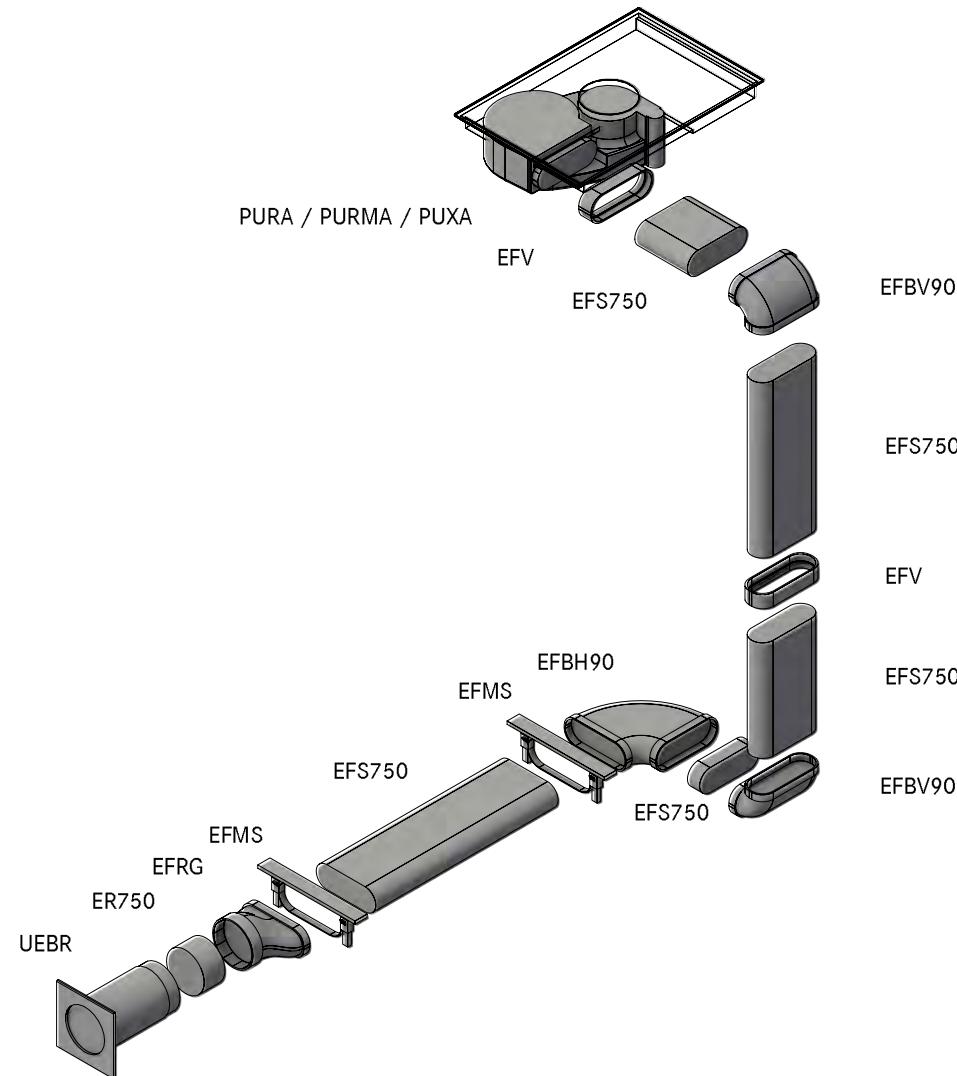

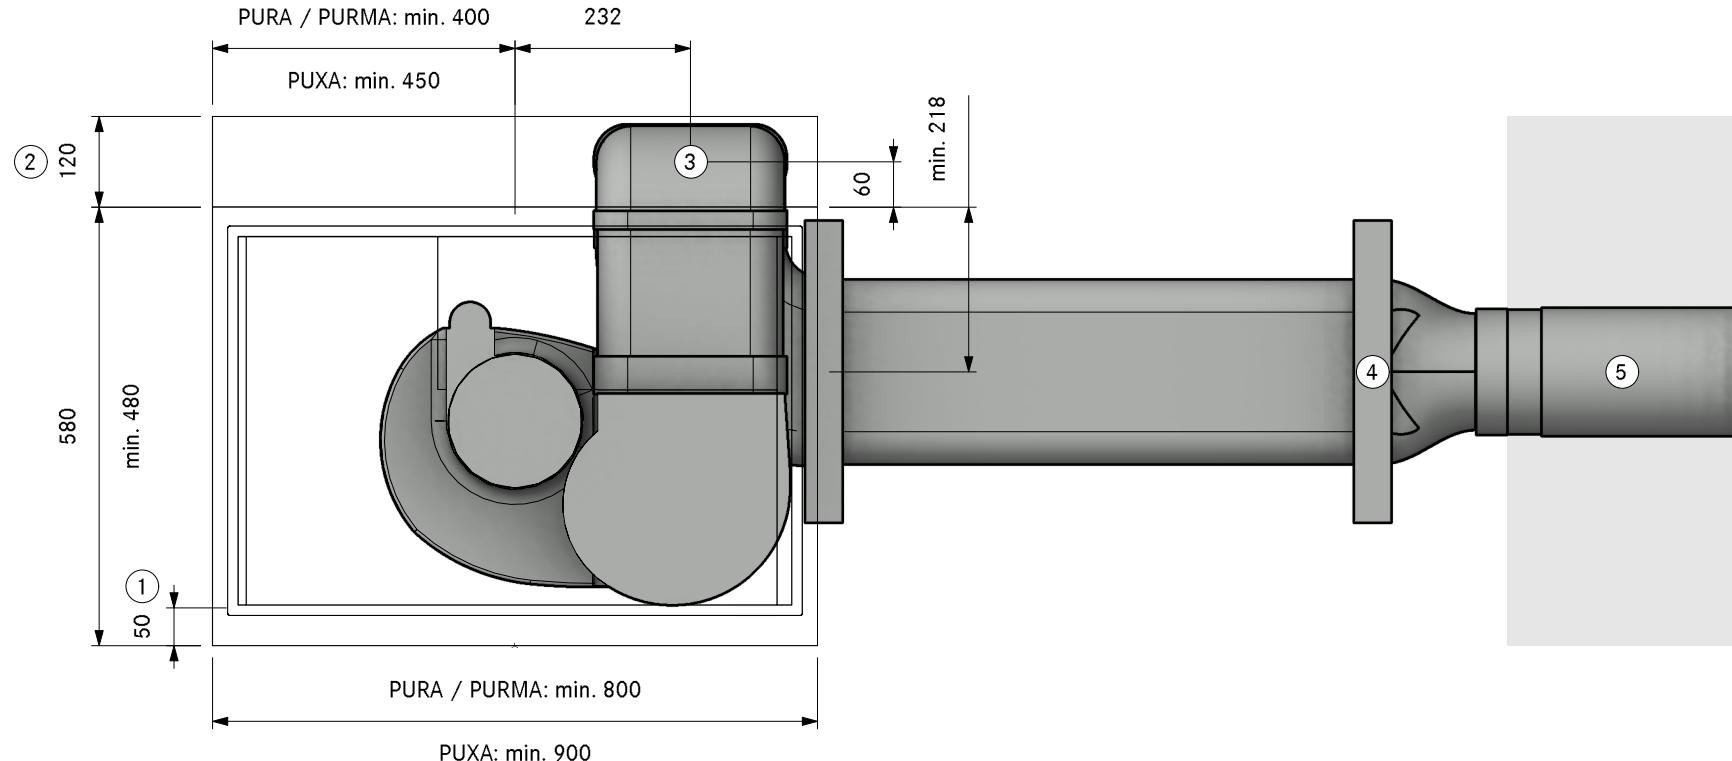

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA40220  
(X/M)Pure Cellar right UEBR

LAYOUT

SA

Version, 1.0

**BORA**

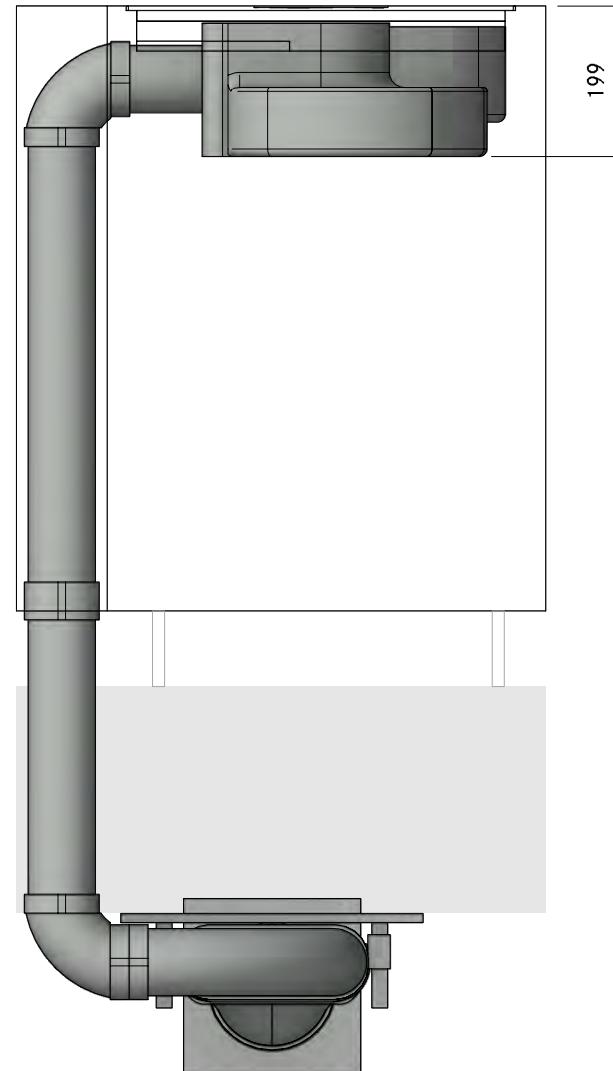

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA40220  
(X/M)Pure Cellar right UEBR

LAYOUT

FA


Version, 1.0

**BORA**

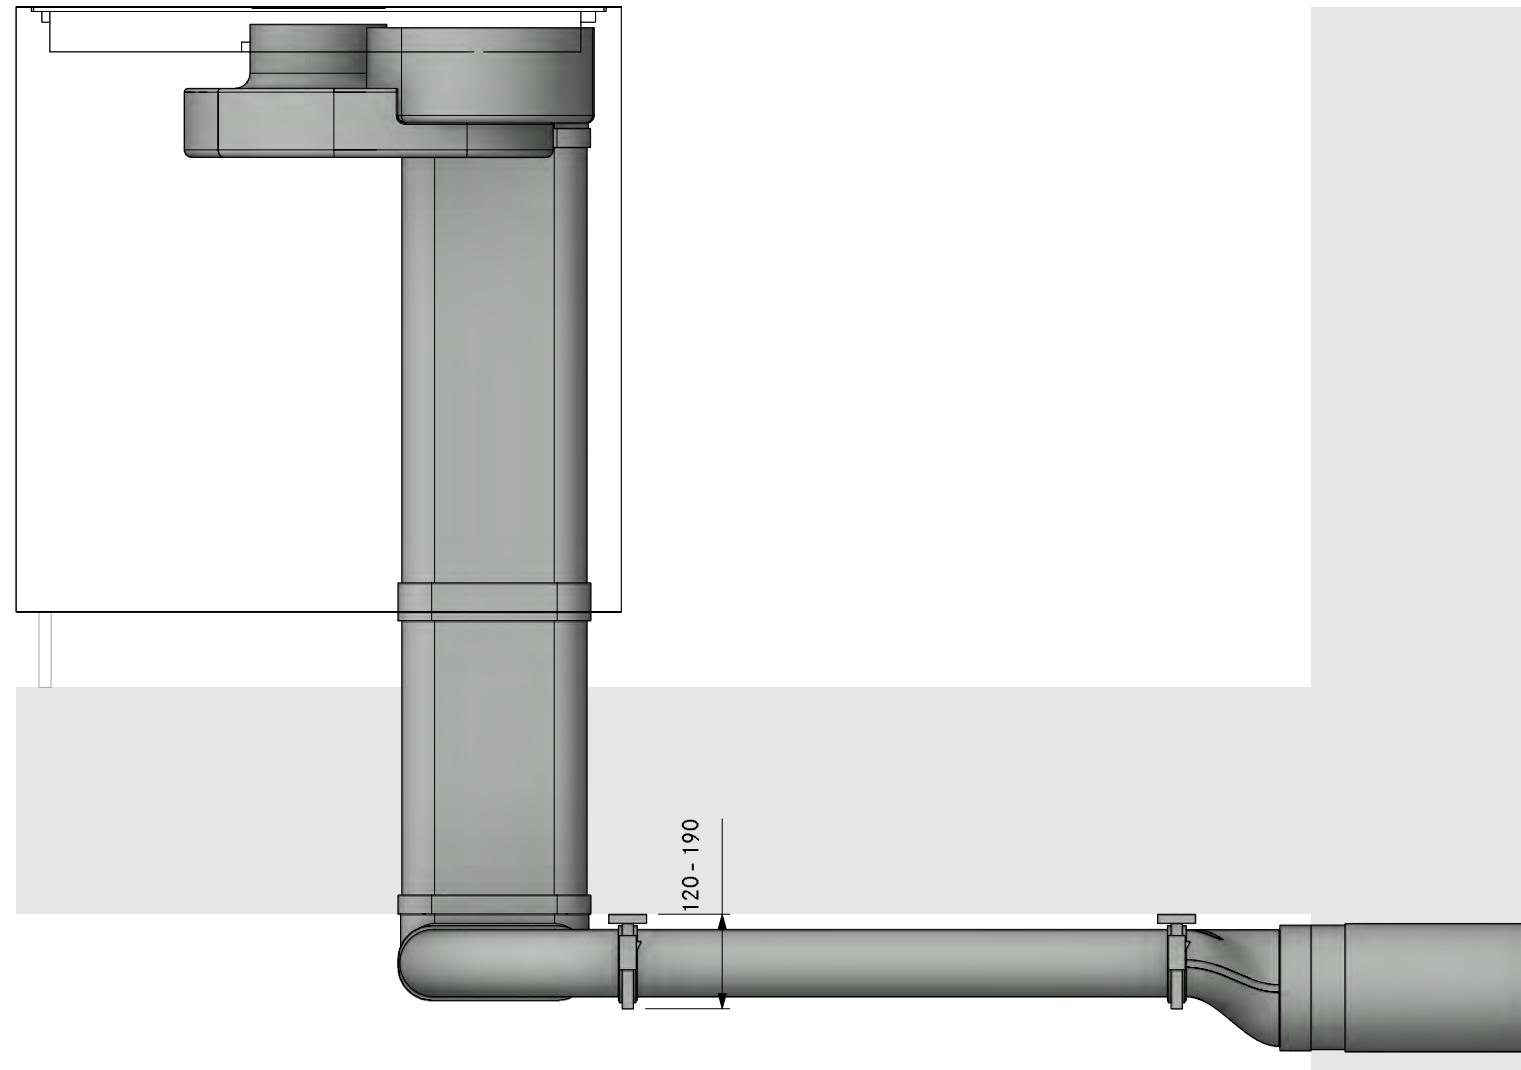


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

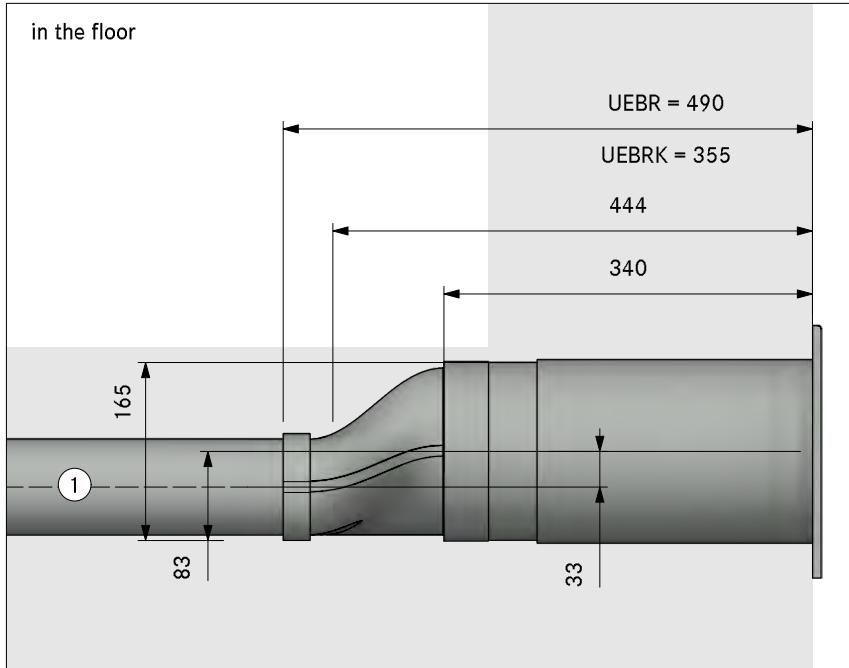

in the plinth area

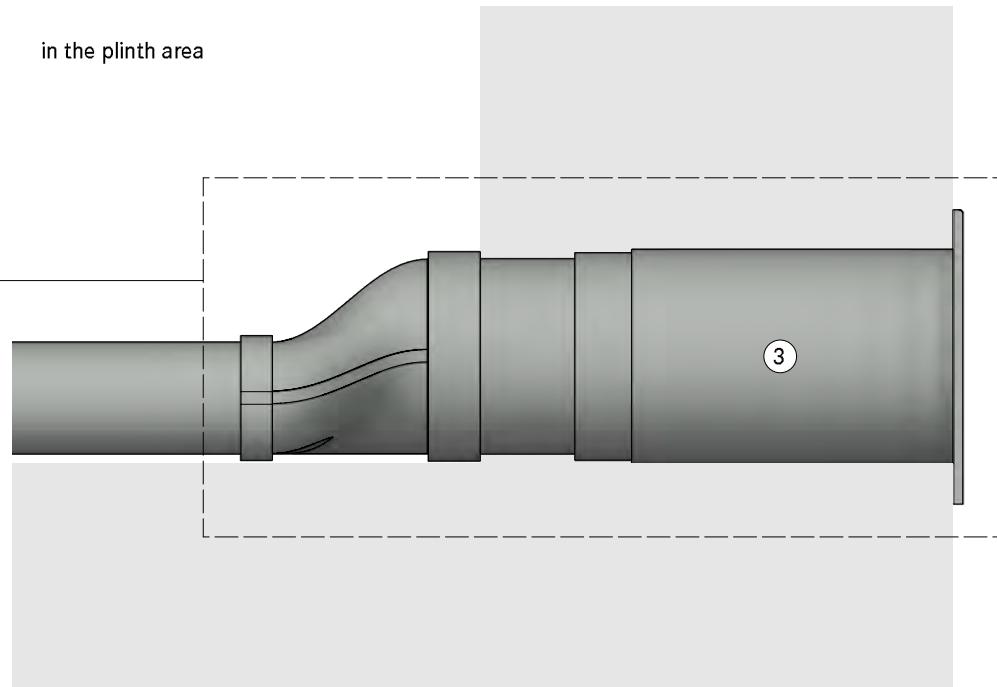

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

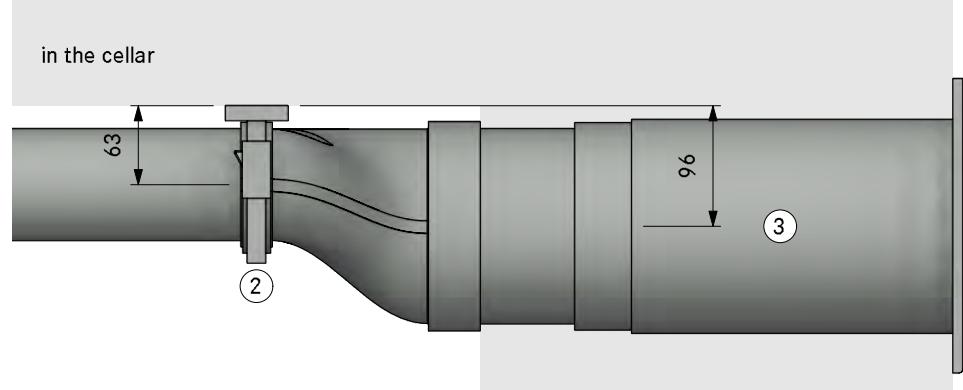



MODELPLAN  
REFERENCE NUMBER  
COMPOSITION


PA40310  
(X/M)Pure Cellar front UEBF


LAYOUT

3D HK

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

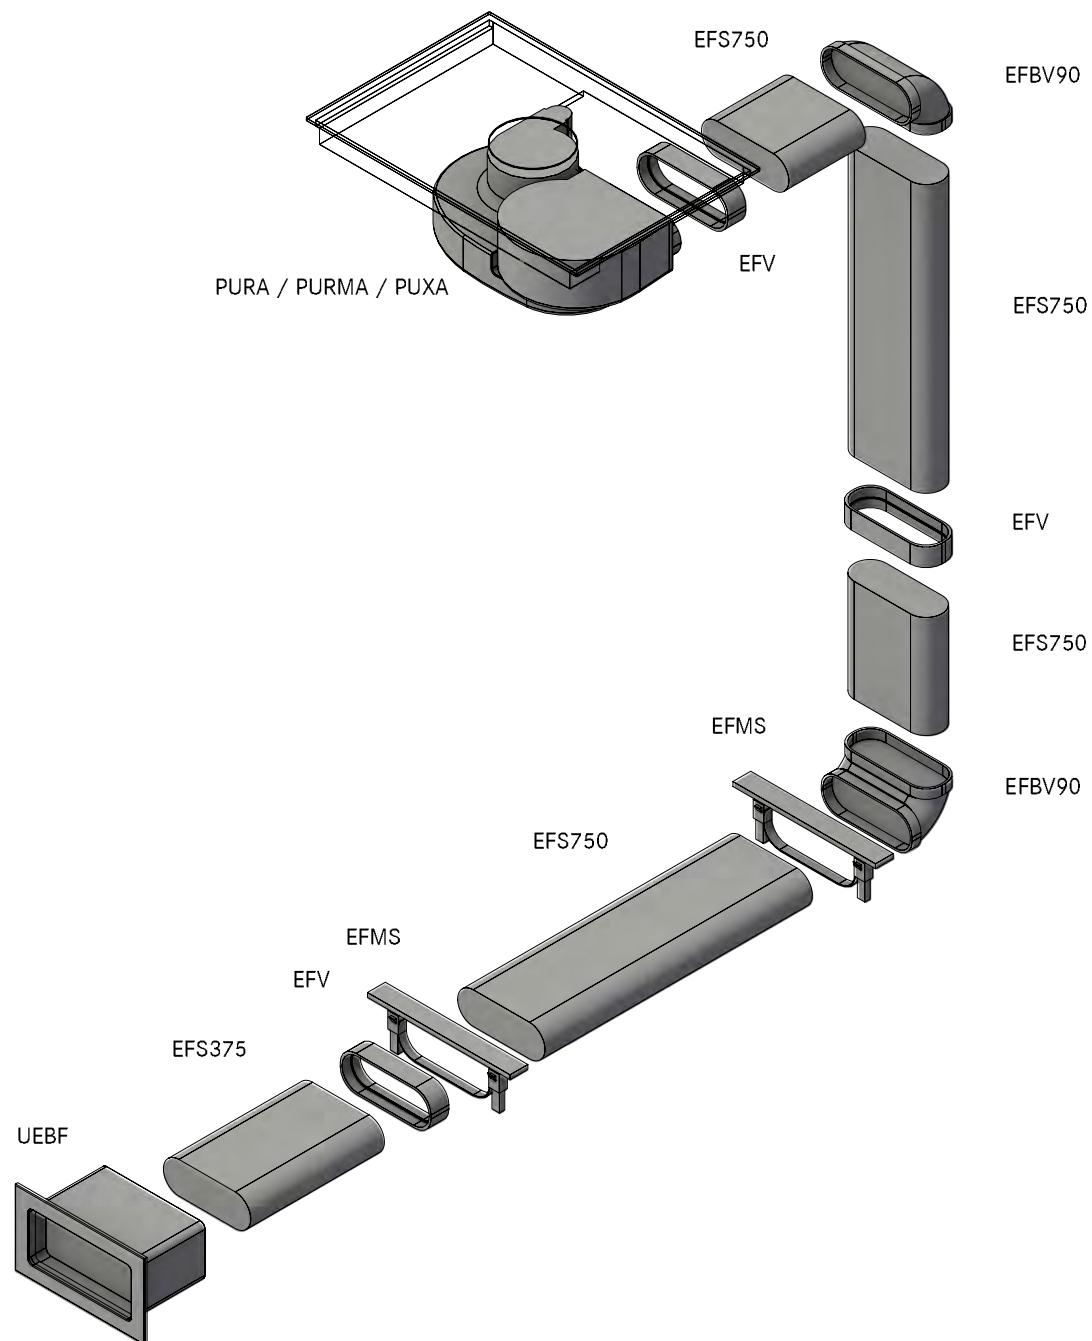

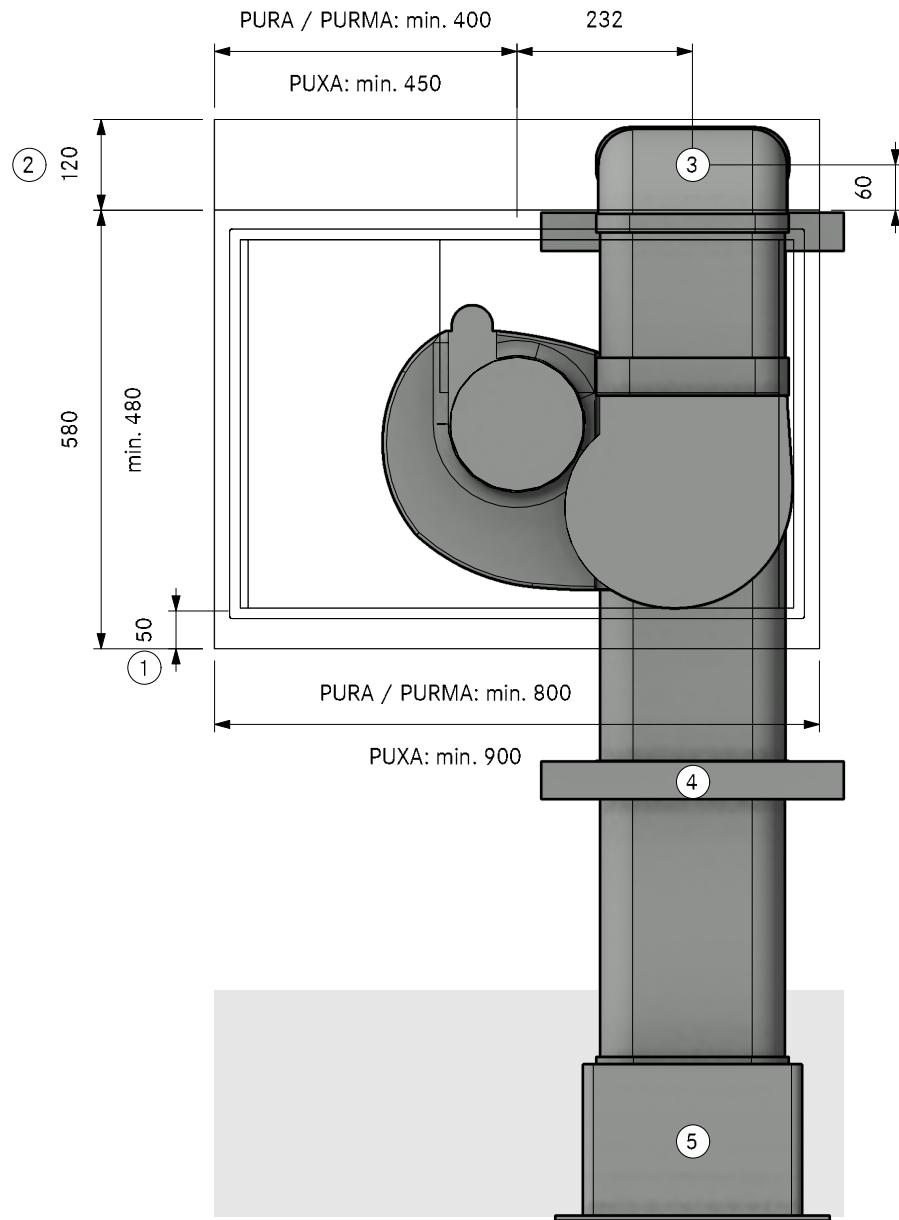

- 1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- 2. Min. space required
- 3. Hole size at least 110 x 270mm
- 4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- 5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA40310  
(X/M)Pure Cellar front UEBF

SA

Version, 1.0

**BORA**

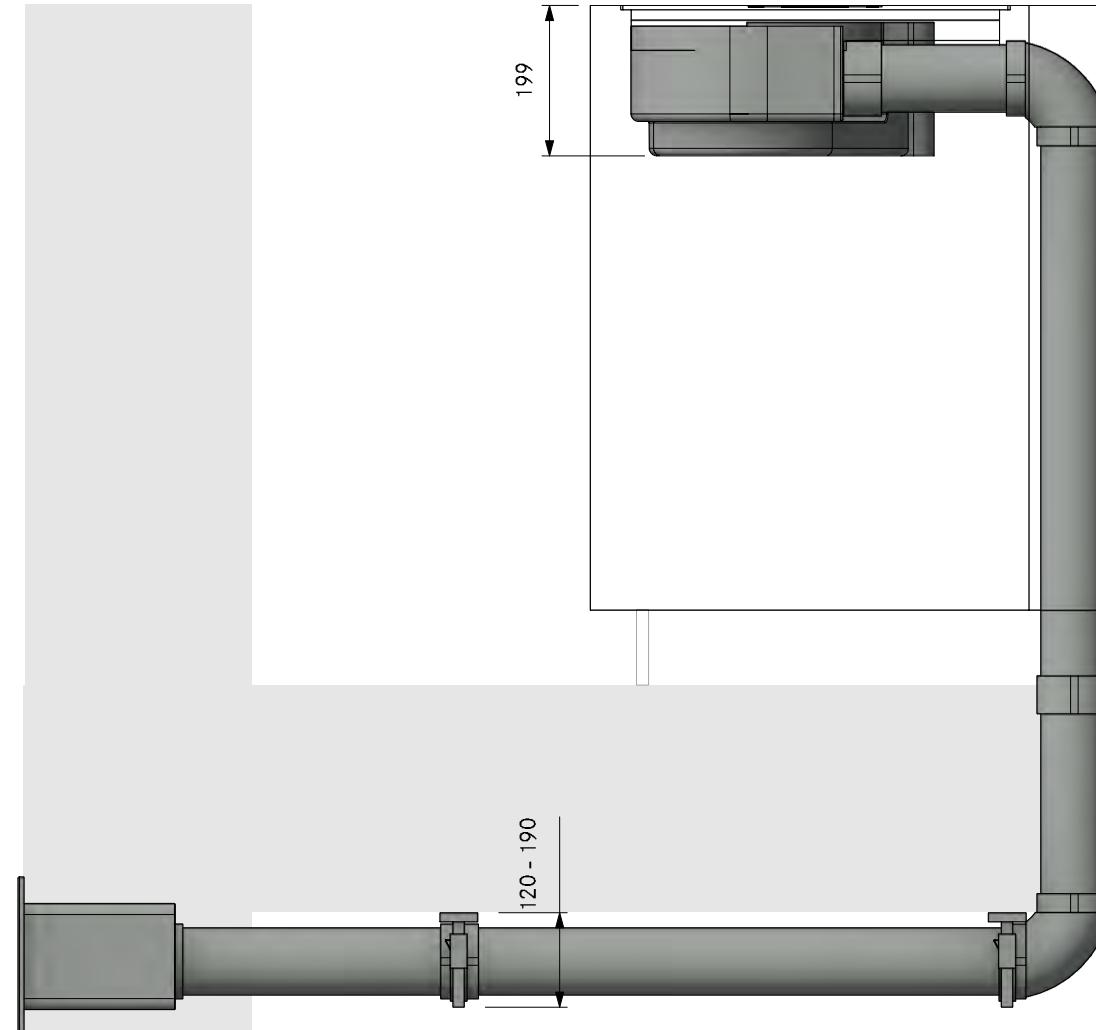

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA40310  
(X/M)Pure Cellar front UEBF

Version, 1.0

**BORA**

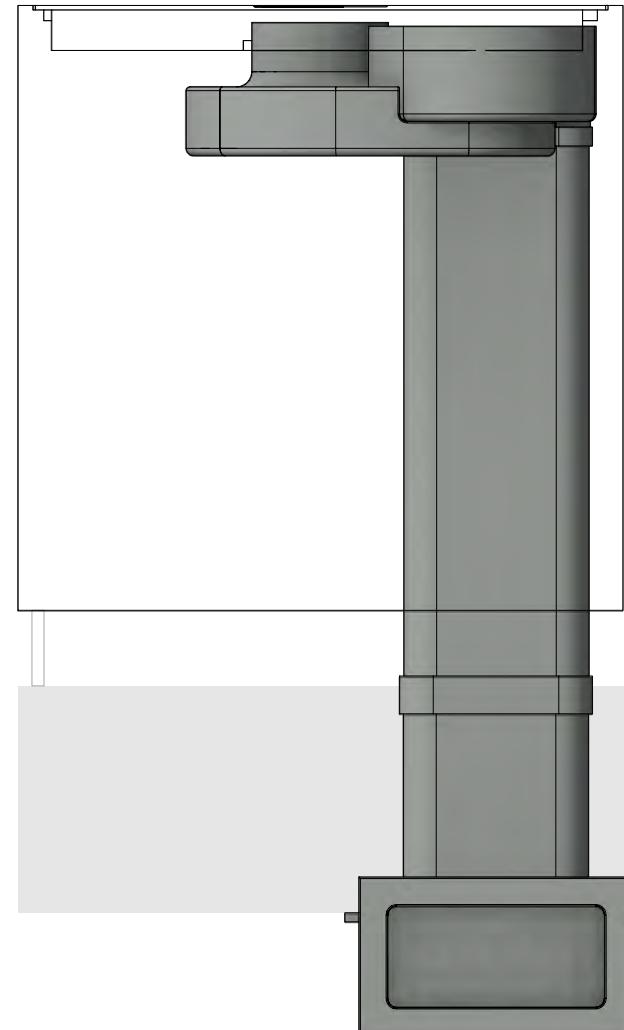

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40310  
(X/M)Pure Cellar front UEBF

LAYOUT Detail

Version, 1.0

**BORA**

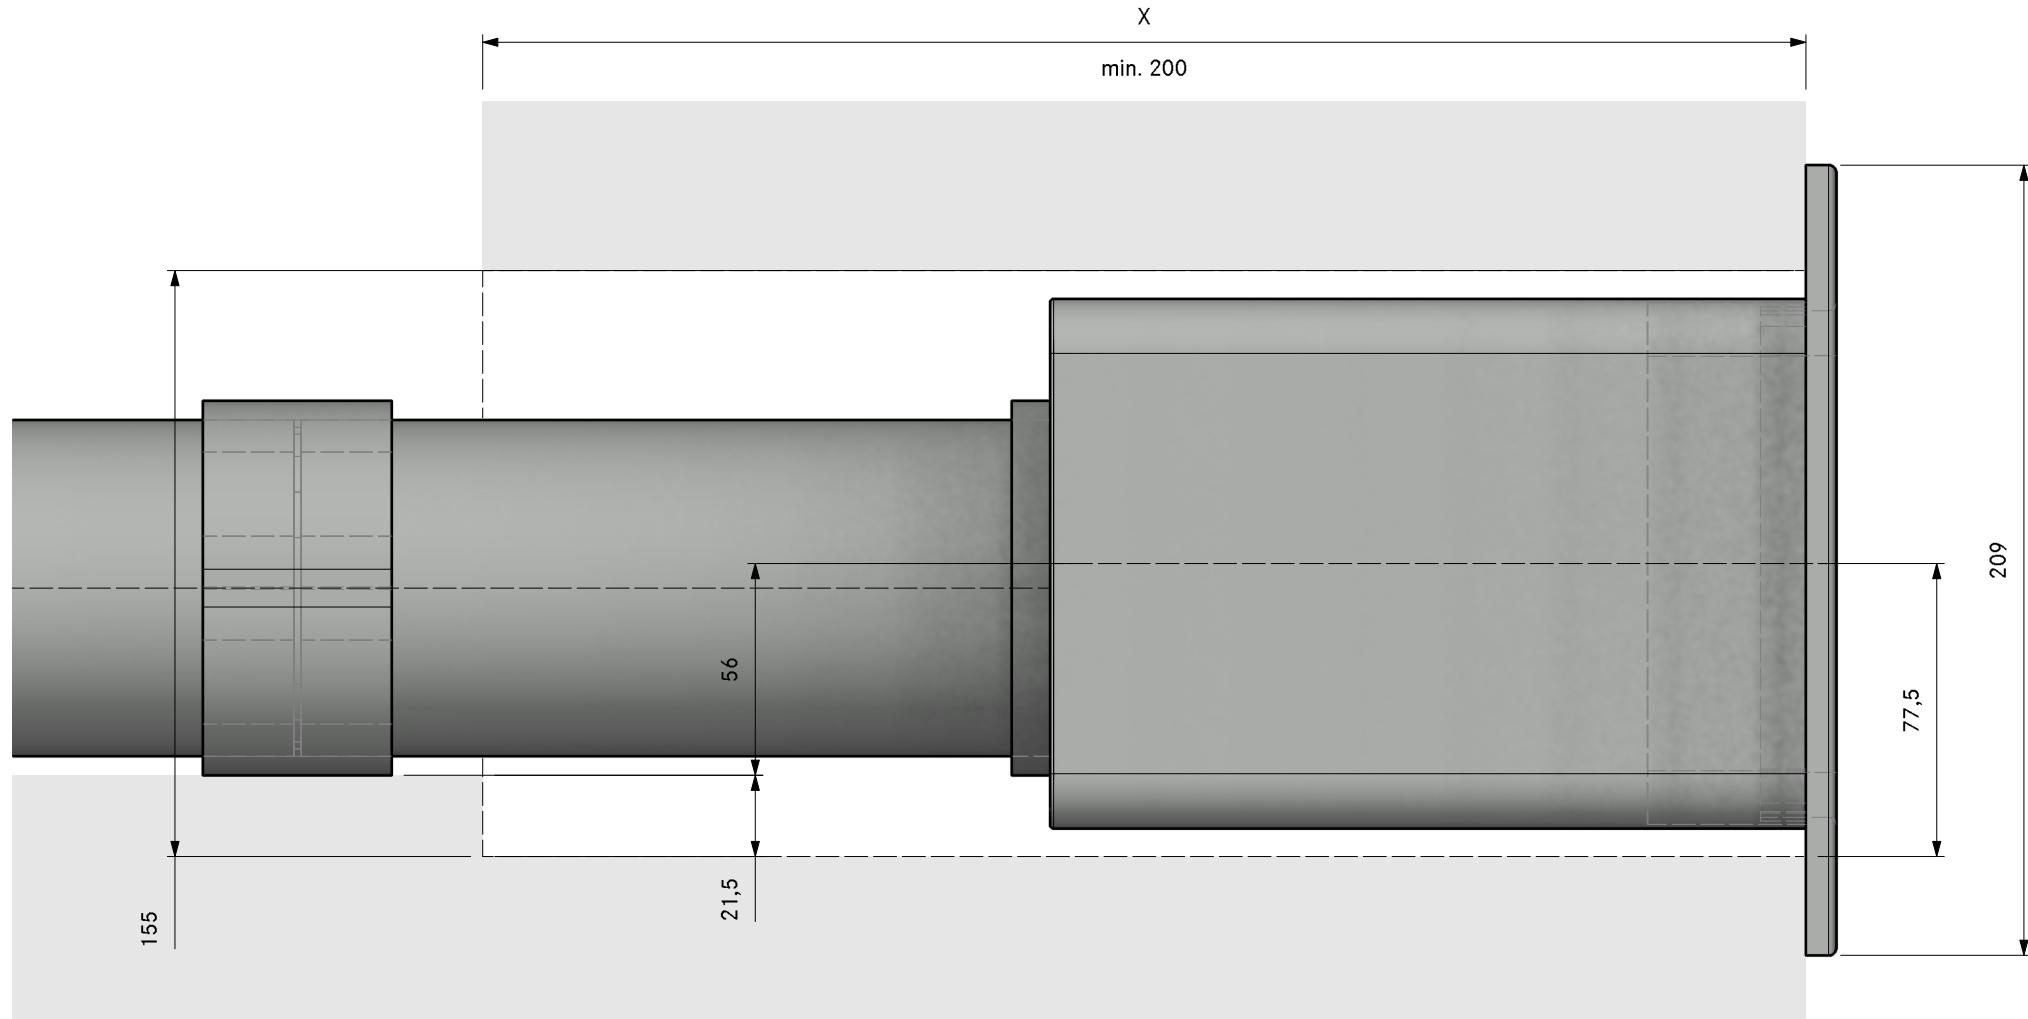

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com



MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA40320  
(X/M)Pure Cellar front UEBR


LAYOUT

3D HK

Count	Item BORA	
1	PURA / PURMA / PUXA	Pure surface-/induction cooktop with integrated cooktop extractor - Exhaust air
<b>Item BORA Ecotube</b>		
2	EFBV90	90° bend flat vertical
2	EFMS	installation set flat
1	EFRG	bridge flat round straight
2	EFV	duct connection flat
1	UEBR	3box wall sleeve round
1	ER750	round duct 750mm
3	EFS750	shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

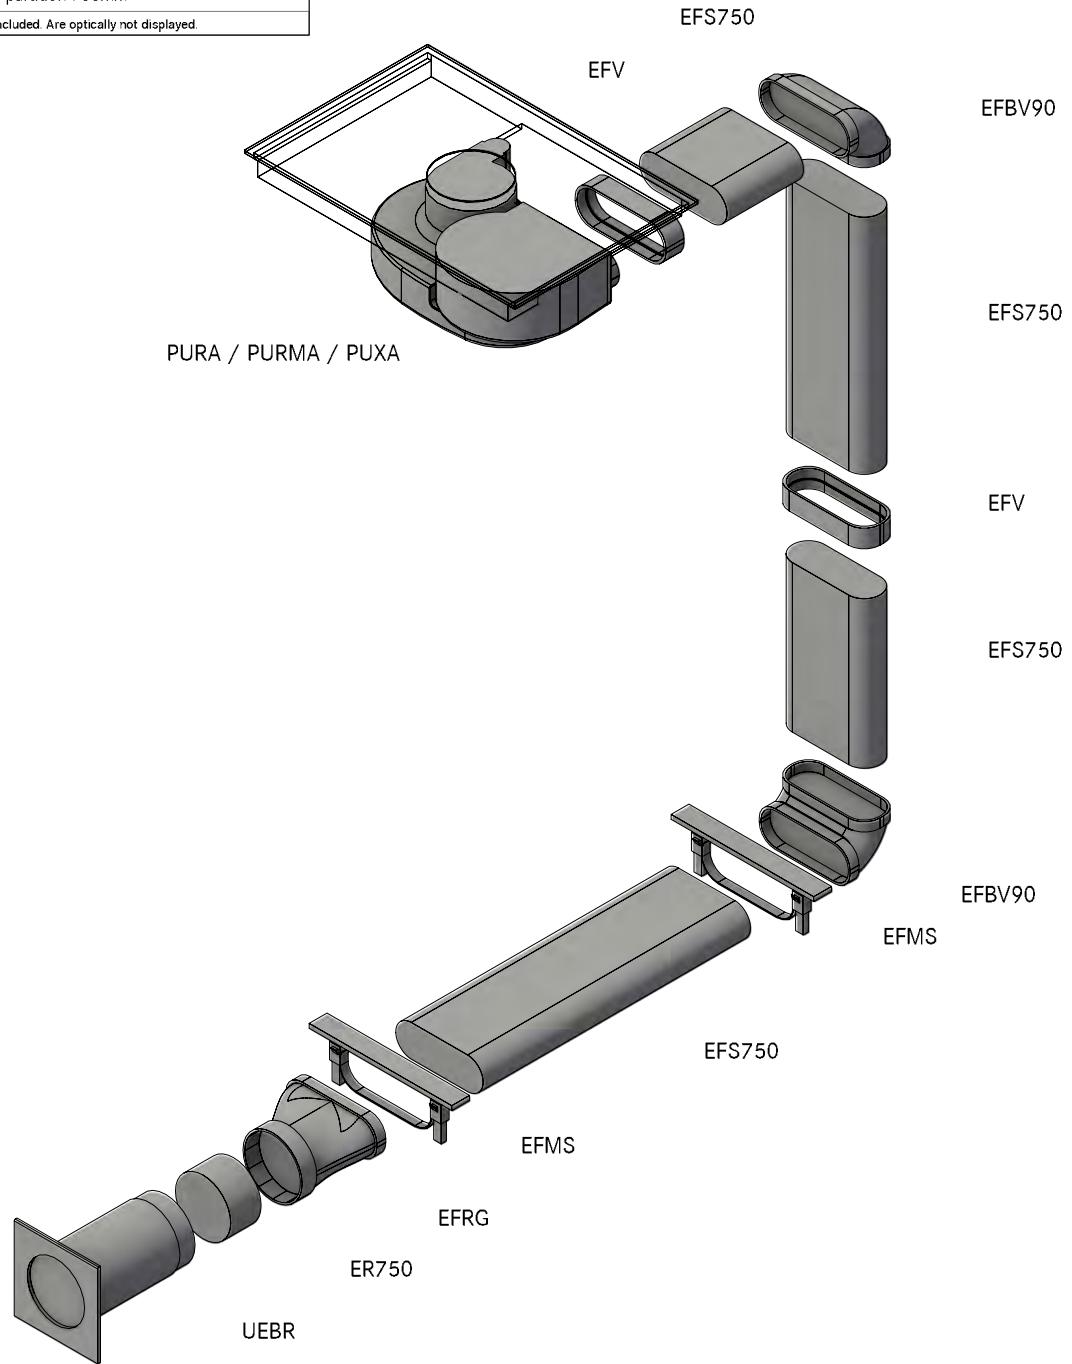

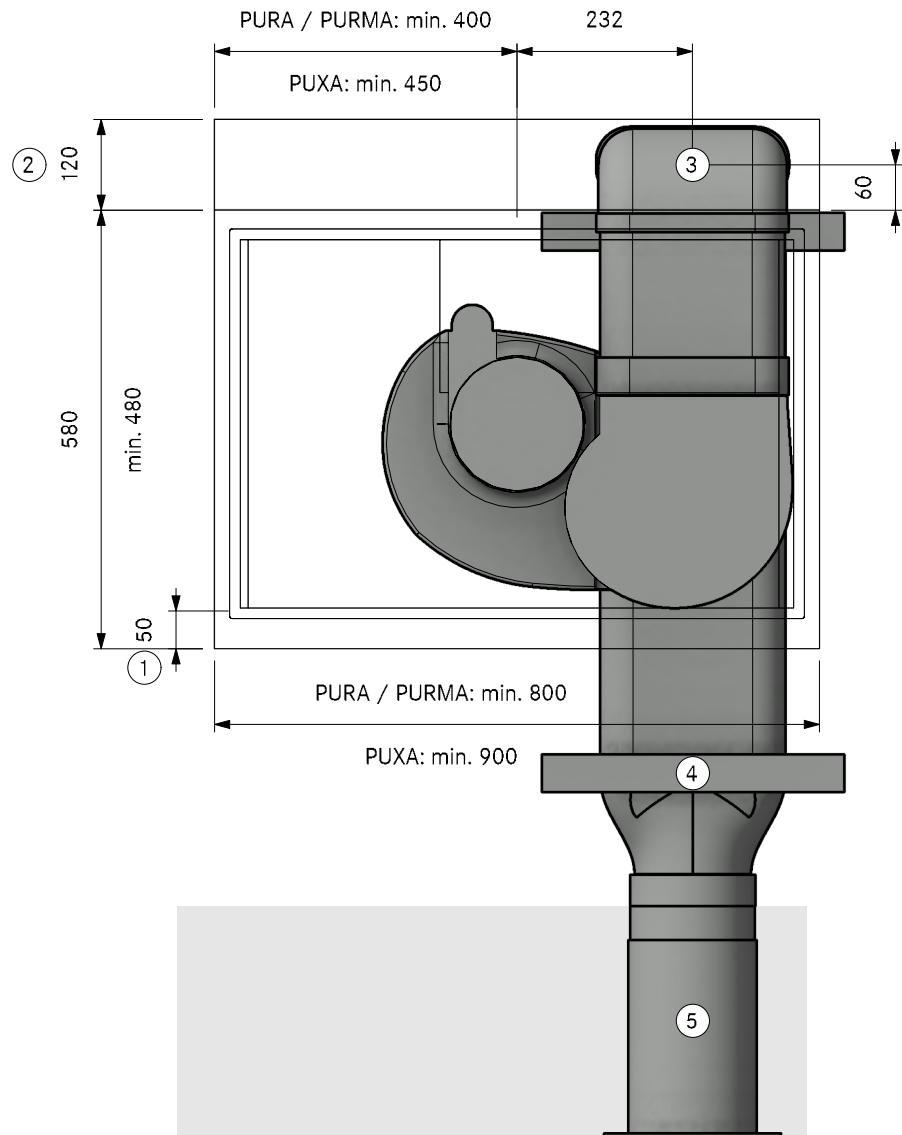


- (1) At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- (2) Min. space required
- (3) Hole size at least 110 x 270mm
- (4) One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
- (5) Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION  
LAYOUT

PA40320  
(X/M)Pure Cellar front UEBR  
SA

Version, 1.0

**BORA**

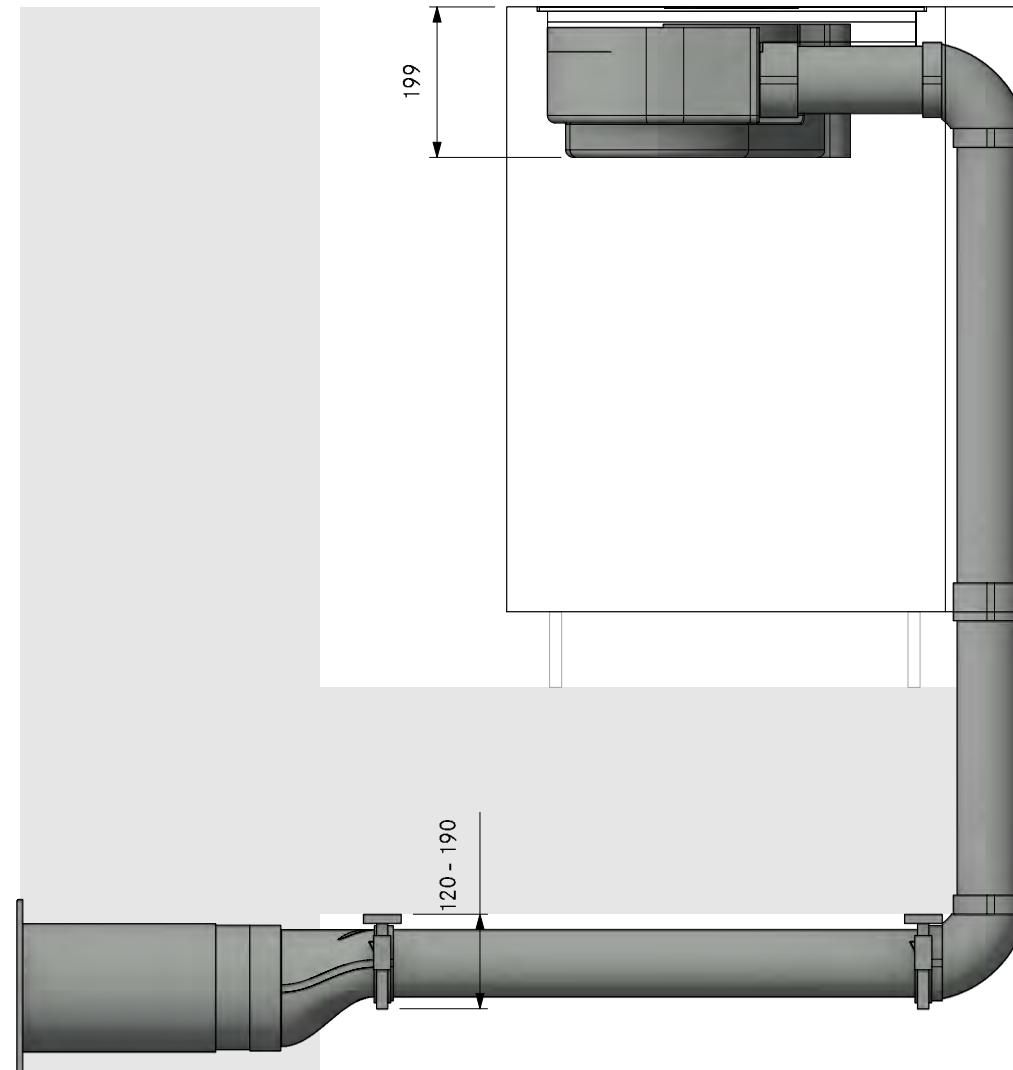

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40320  
(X/M)Pure Cellar front UEBR

LAYOUT FA

Version, 1.0

**BORA**

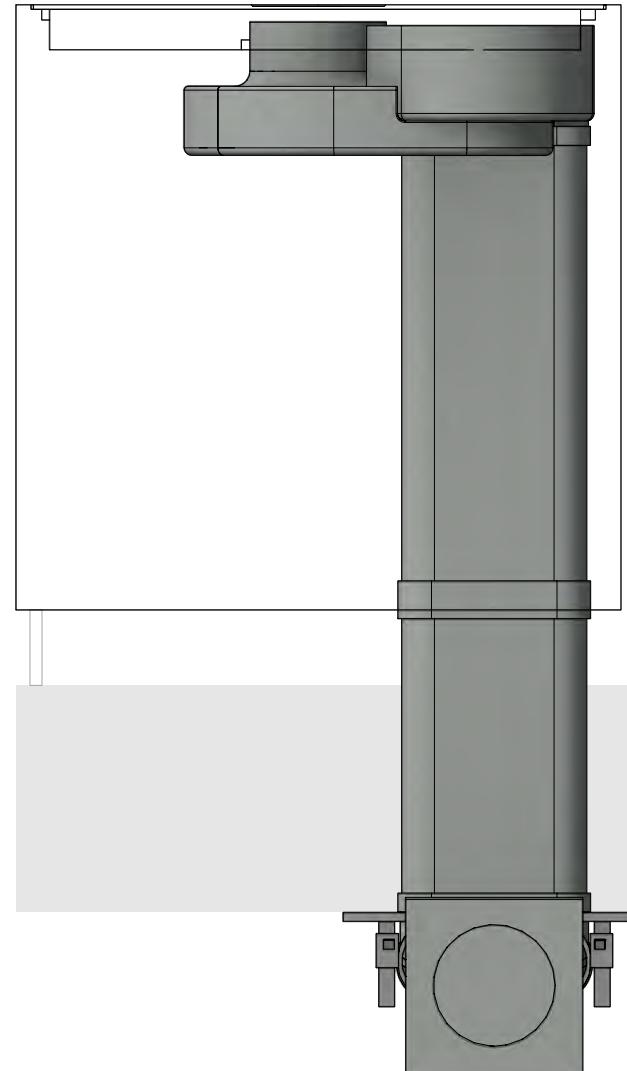


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


Page 4

LAYOUT


Detail

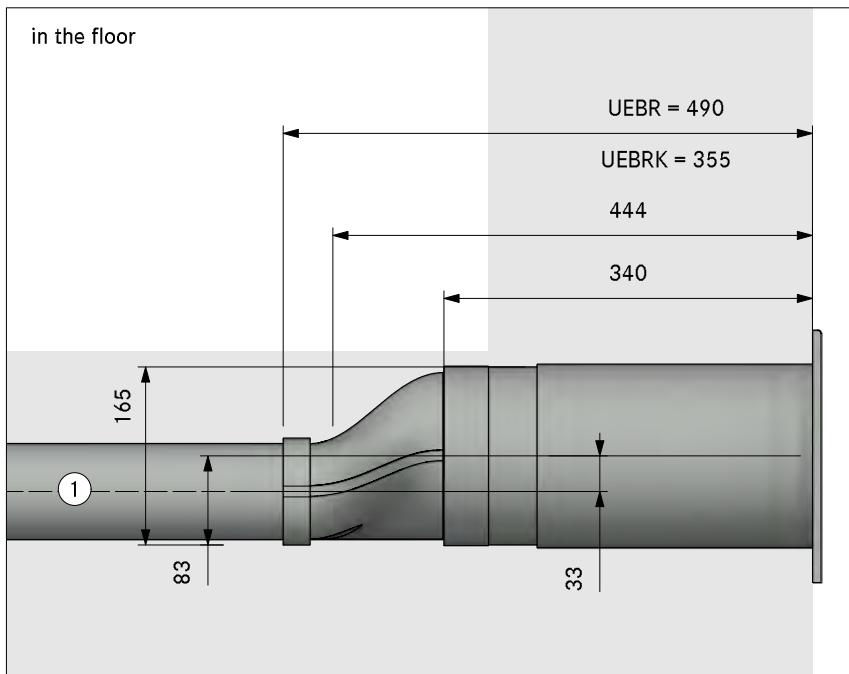

in the plinth area

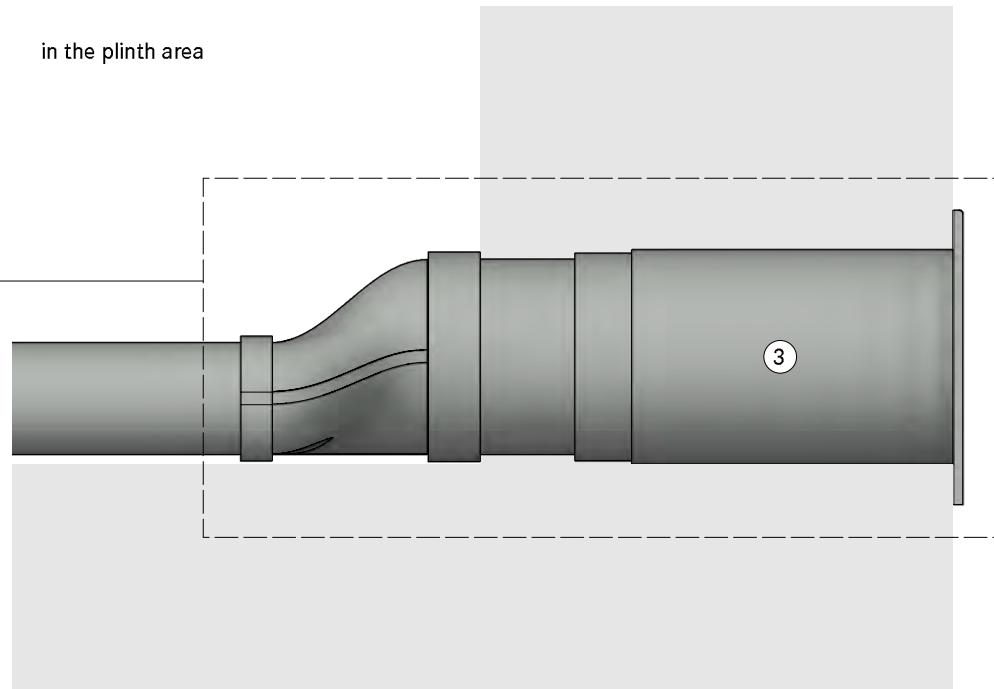

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

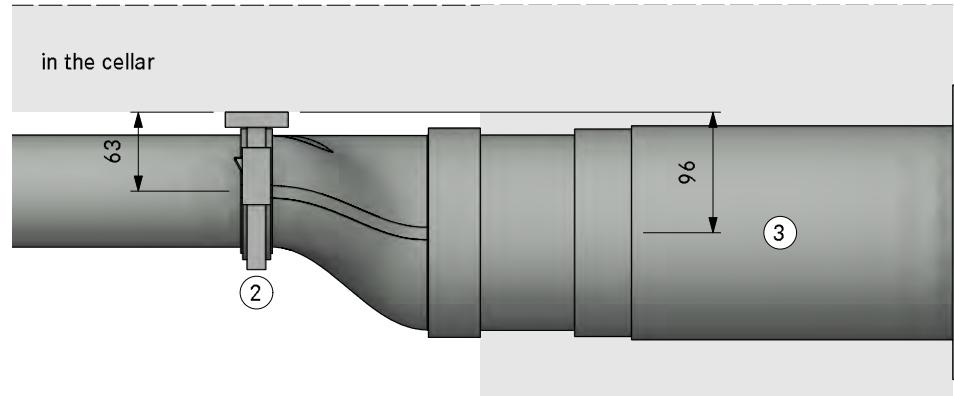




MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40410  
(X/M)Pure Cellar left UEBF

LAYOUT 3D

Version, 1.0


**BORA**

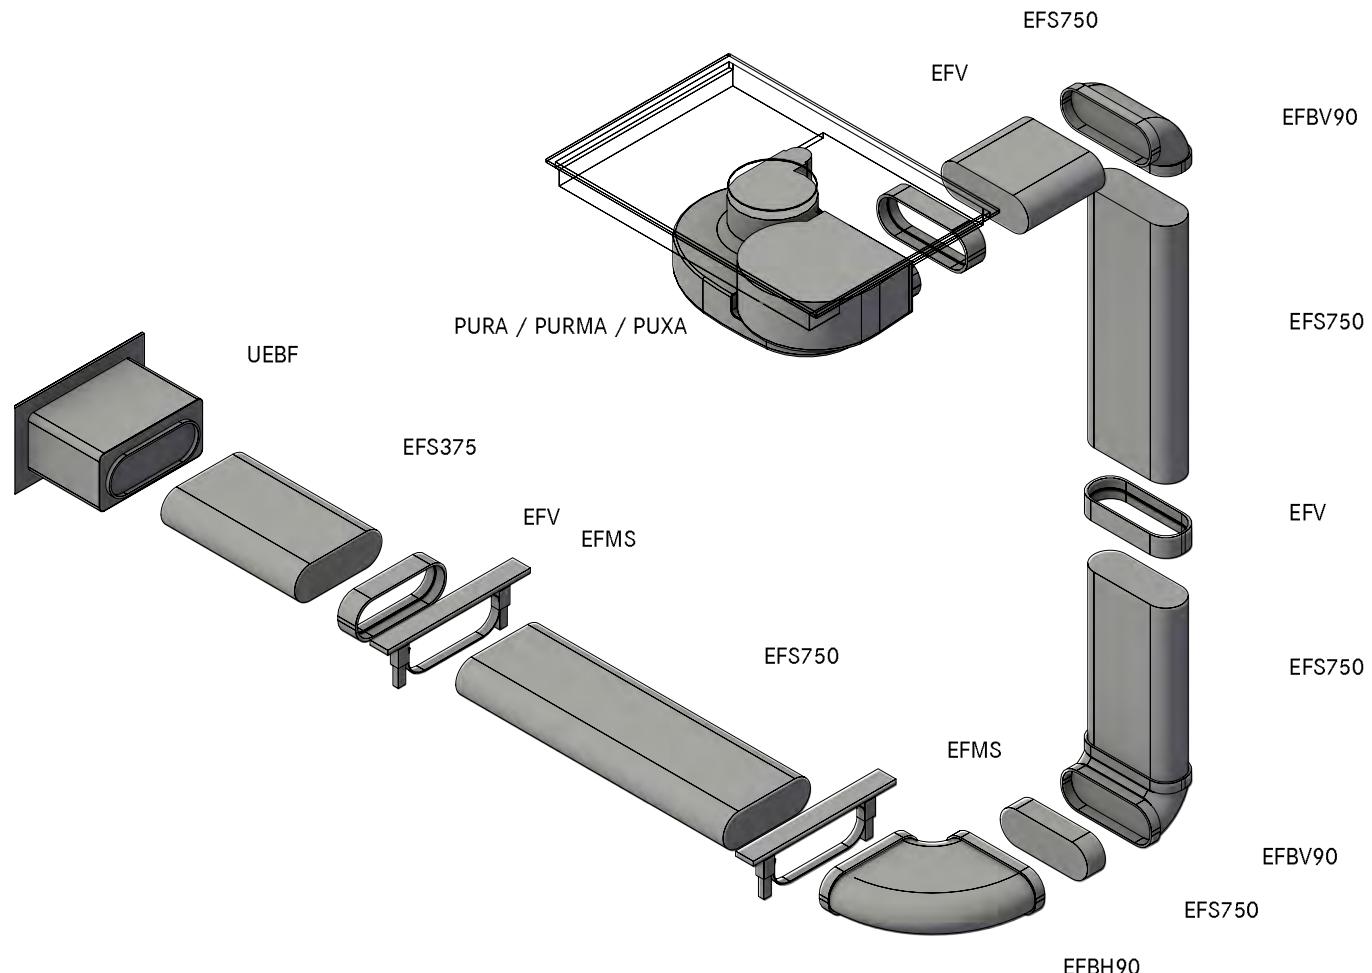

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
3	EFV duct connection flat
1	UEBF 3box wall sleeve
3	EFS750 shallow duct with partition 750mm
Please check for accuracy. Seals included. Are optically not displayed.	

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

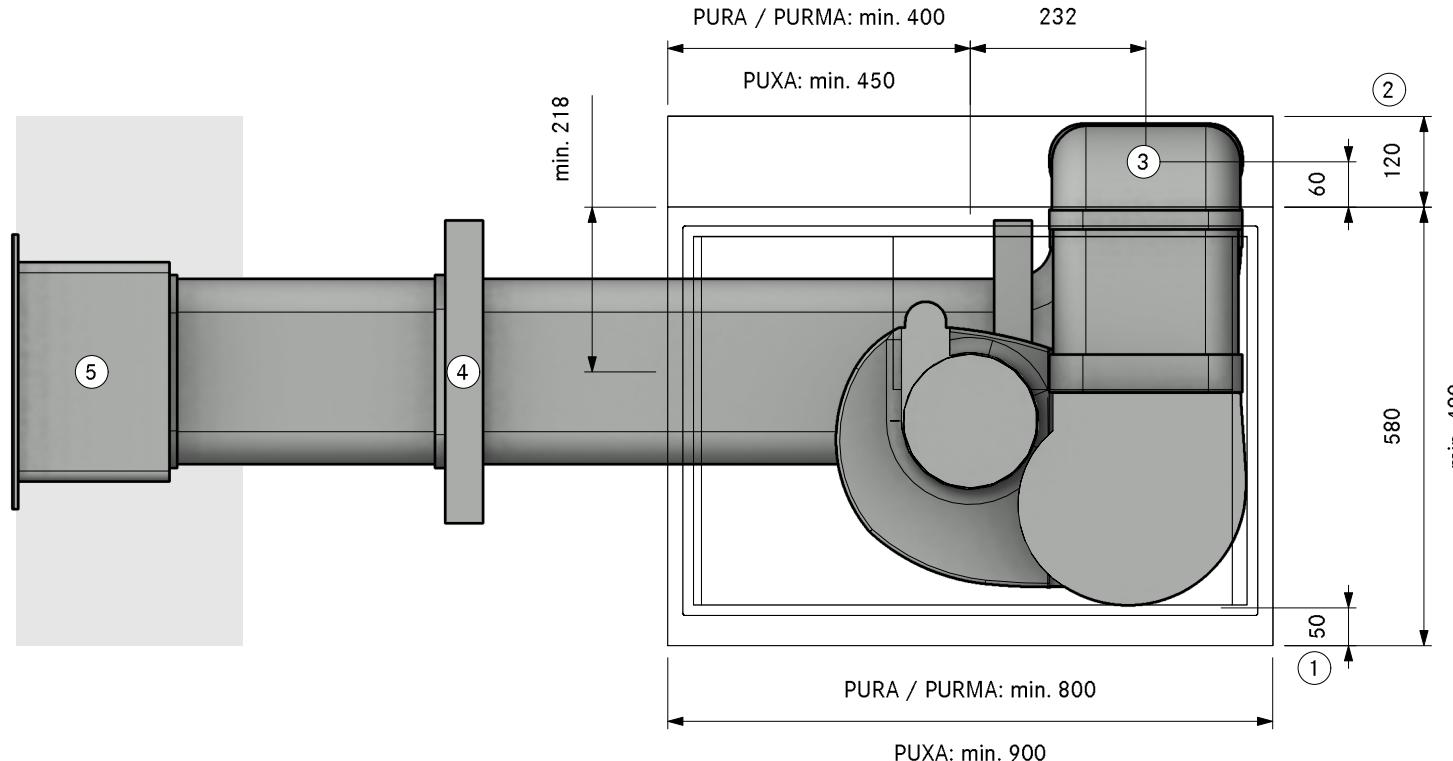

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size 310 x 155mm  
Wall vent must be able to fully open for air to extract


MODELPLAN  
REFERENCE NUMBER  
COMPOSITION

PA40410  
(X/M)Pure Cellar left UEBF

LAYOUT SA

Version, 1.0

**BORA**

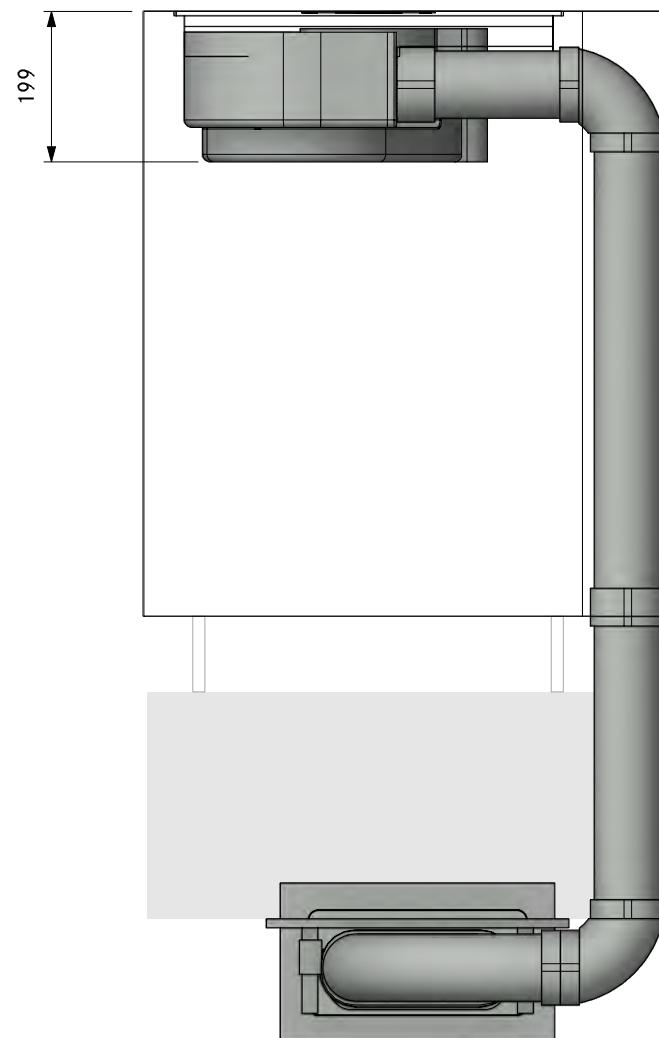

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40410  
(X/M)Pure Cellar left UEBF

LAYOUT FA


Version, 1.0

**BORA**

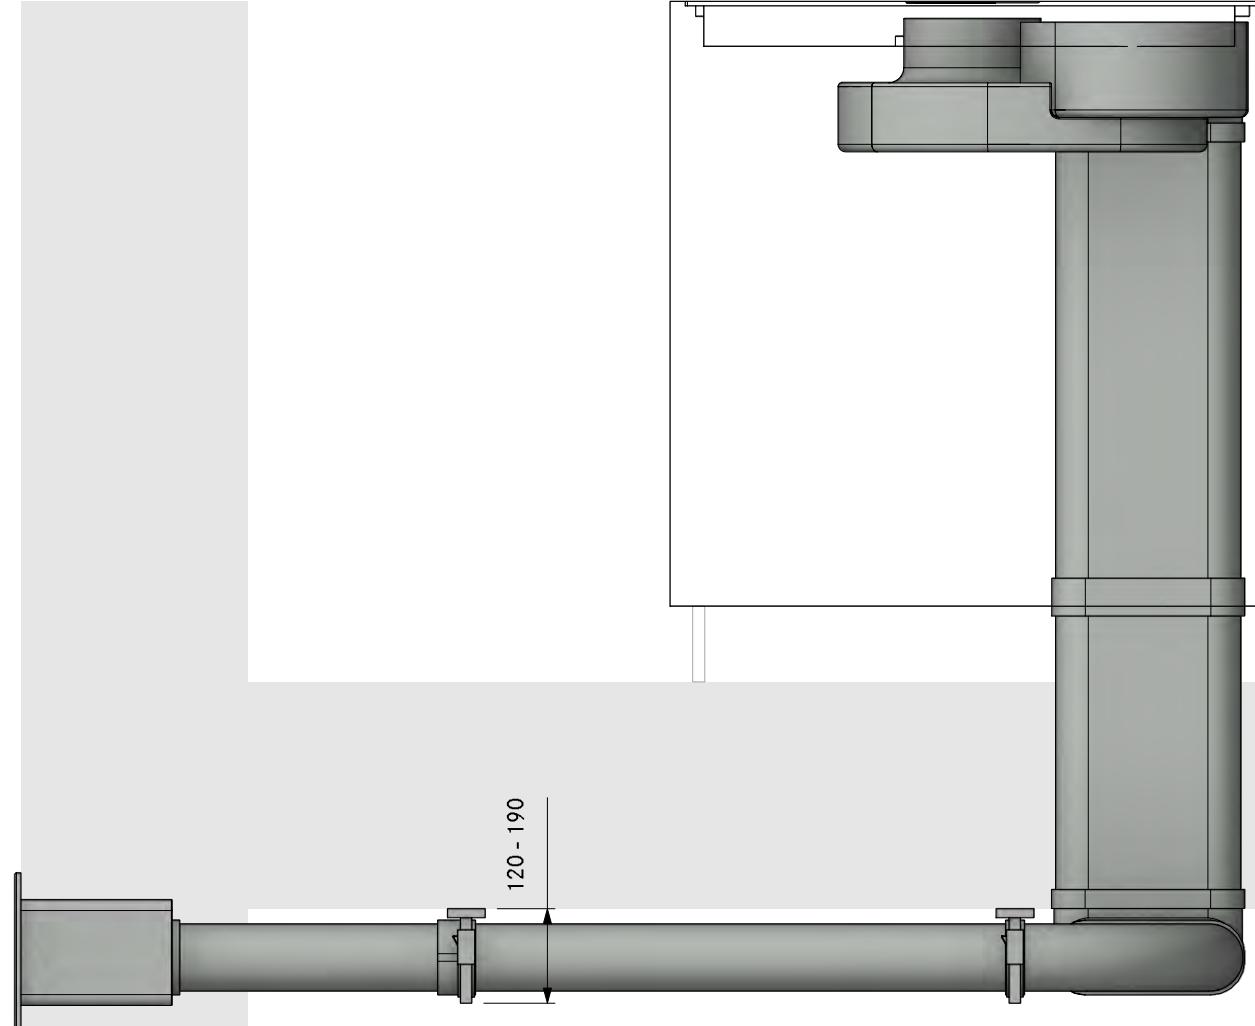

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

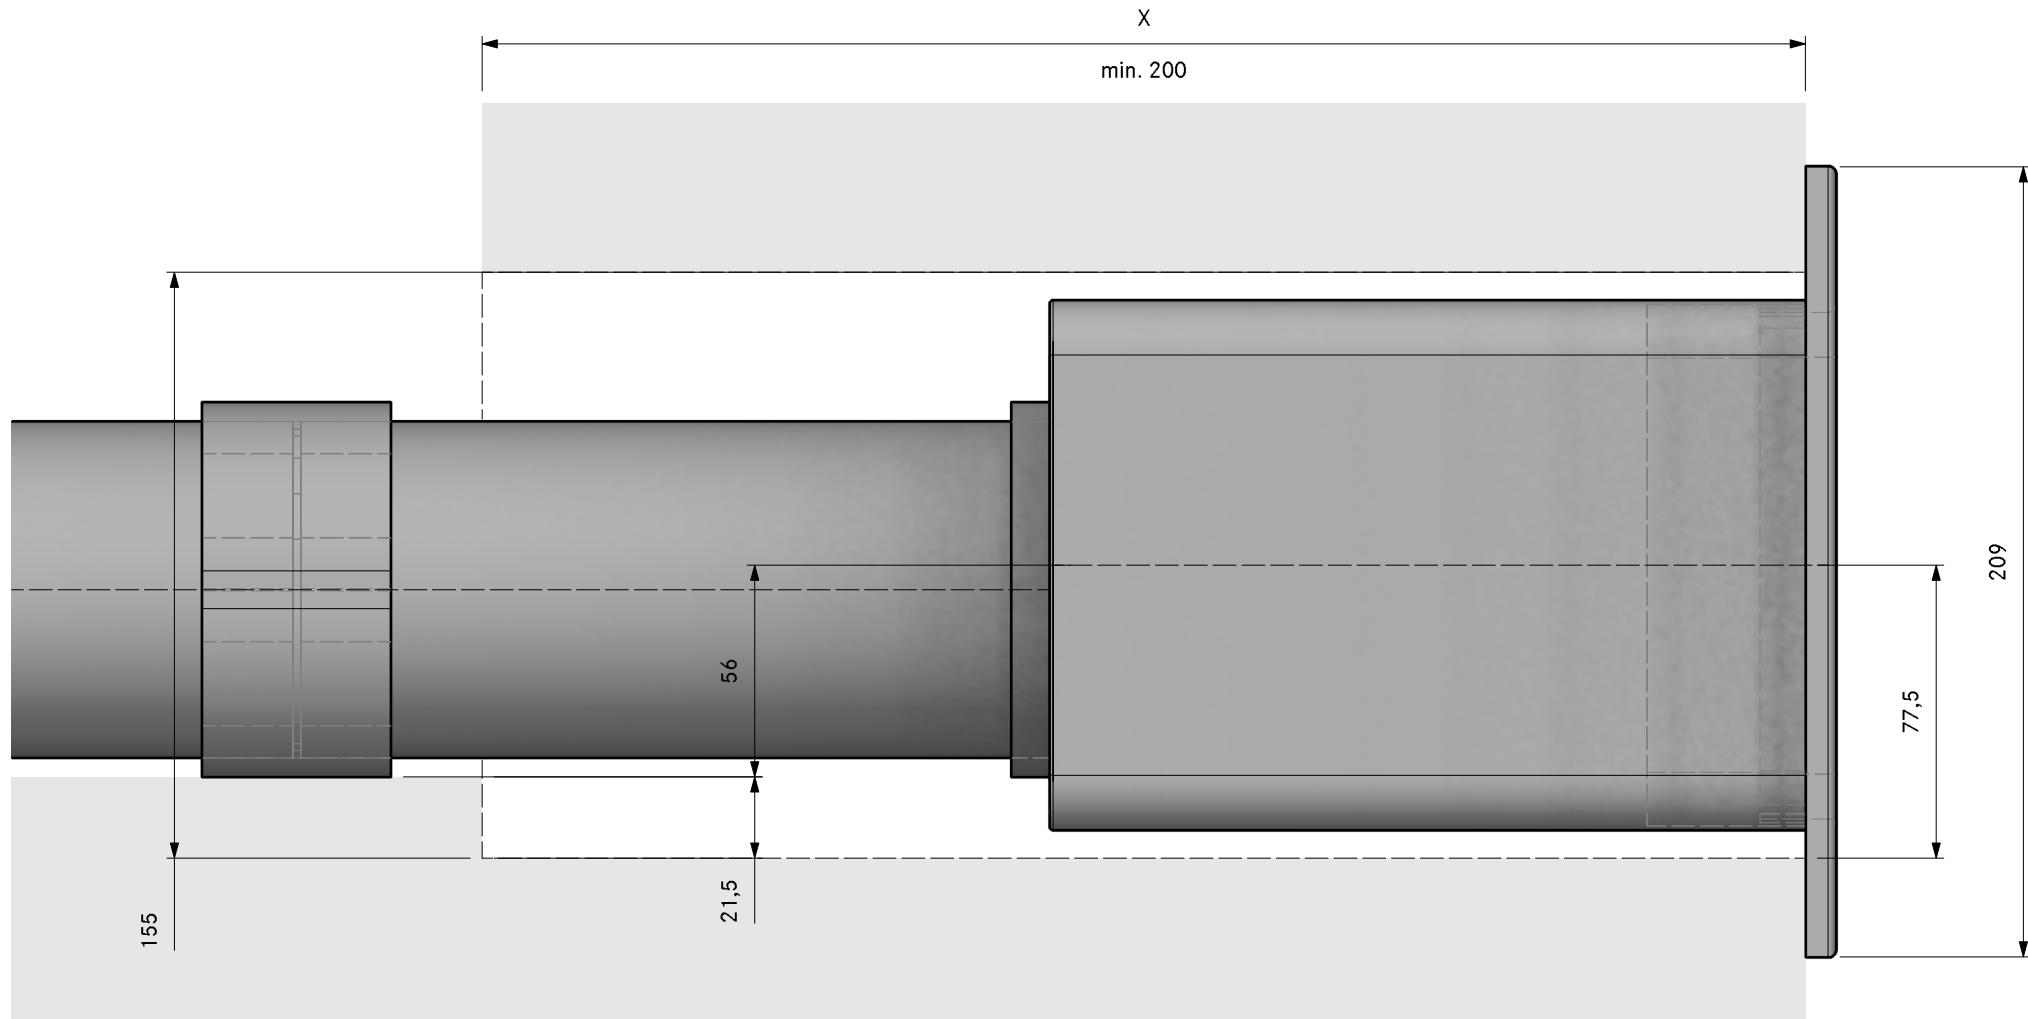



MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40420  
(X/M)Pure Cellar left UEBR


LAYOUT 3D

Version, 1.0

**BORA**


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
<b>Item BORA Ecotube</b>	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
2	EFMS installation set flat
1	ERFG bridge flat round straight
2	EVF duct connection flat
1	UEBR 3box wall sleeve round
1	ER750 round duct 750mm
3	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

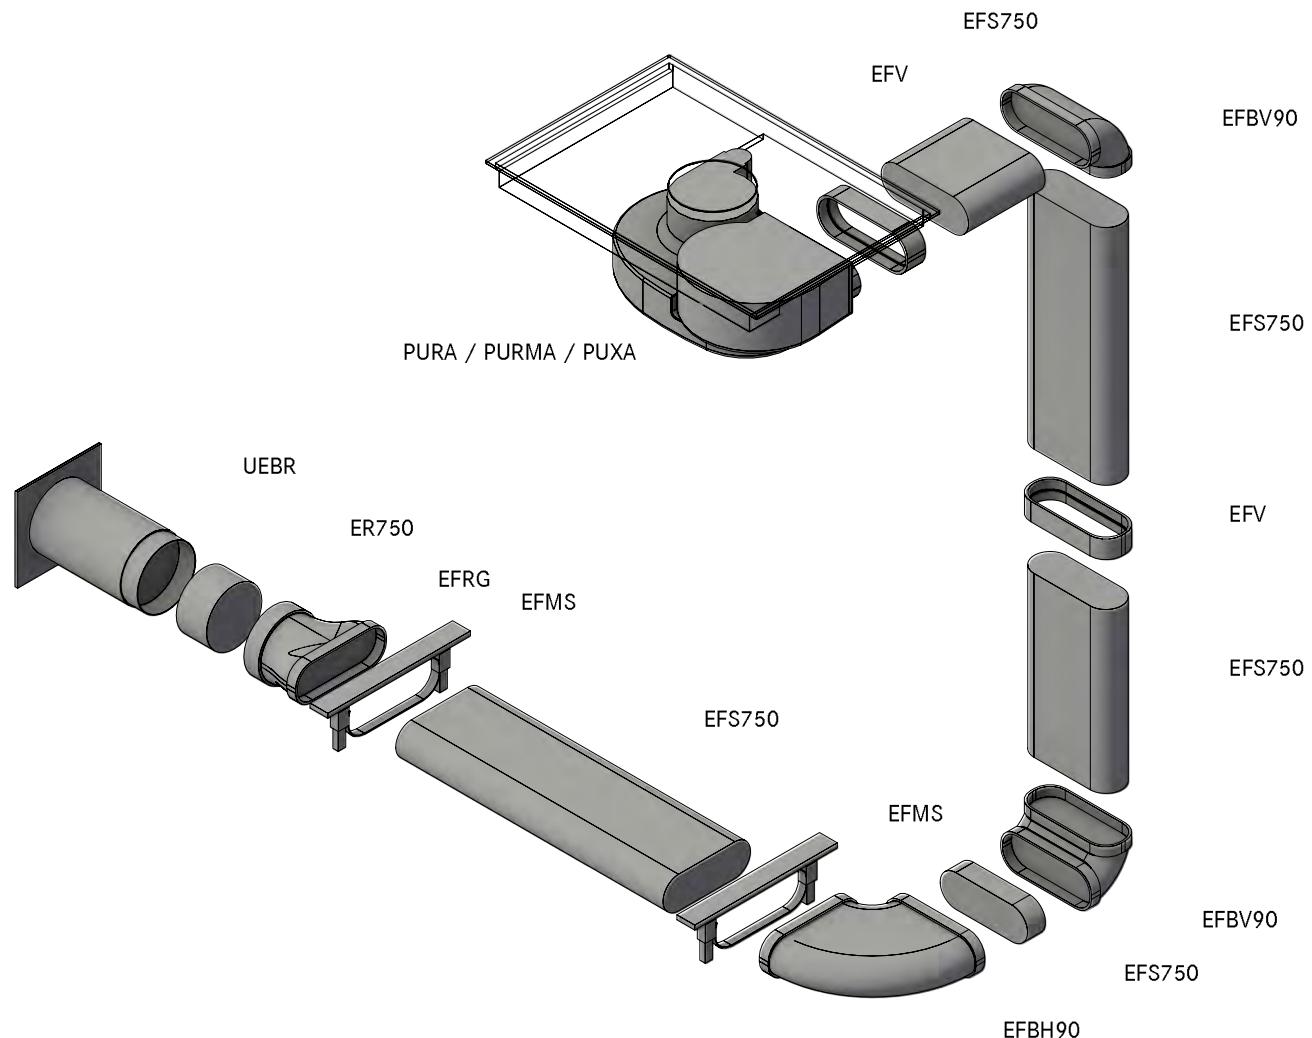

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com

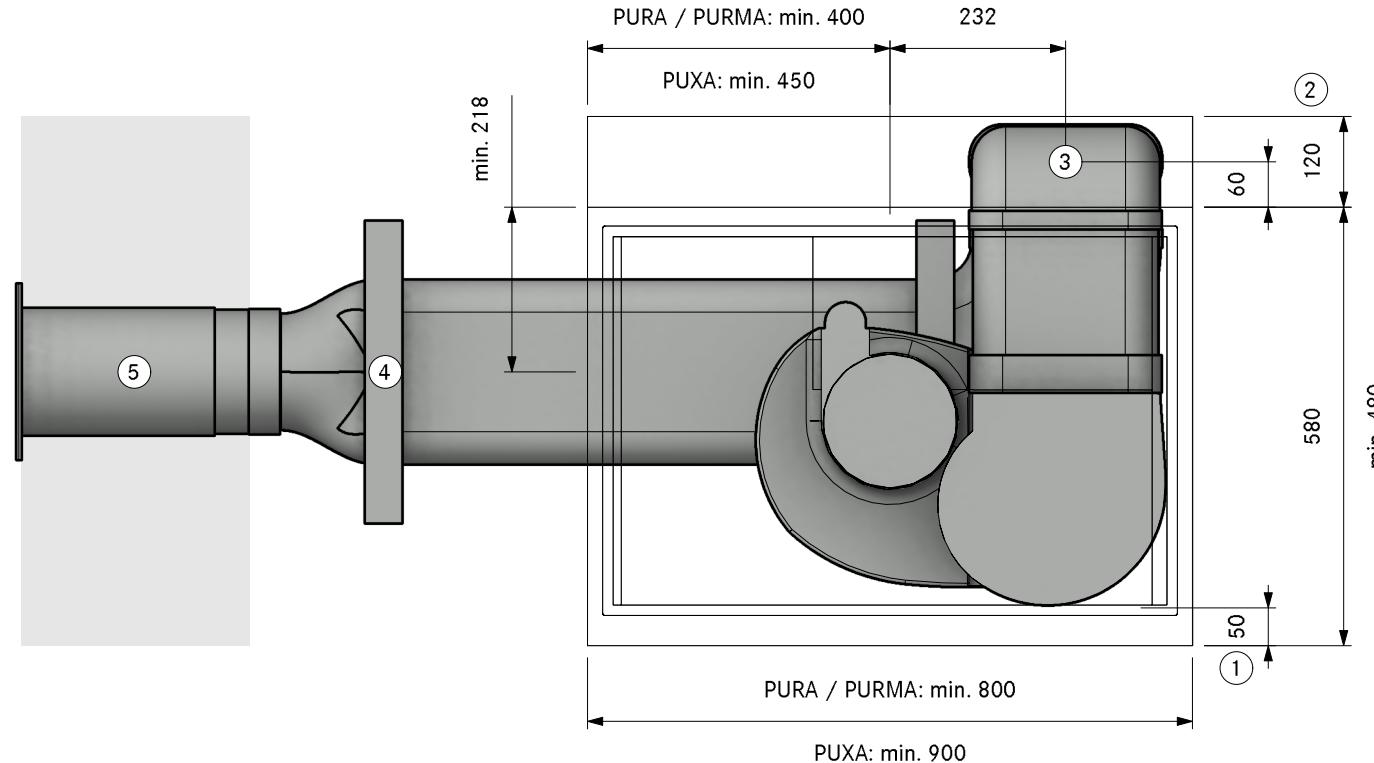

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
2. Min. space required
3. Hole size at least 110 x 270mm
4. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
5. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

MODELPLAN  
REFRENCE NUMBER  
COMPOSITION


PA40420  
(X/M)Pure Cellar left UEBR

LAYOUT

SA

Version, 1.0

**BORA**

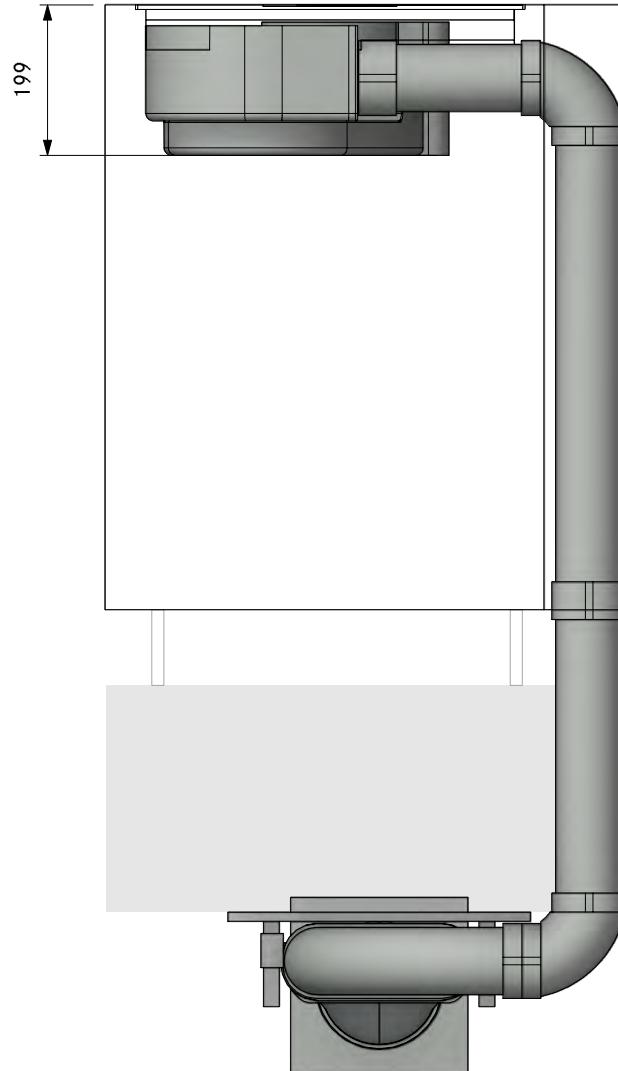

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140  
planung@bora.com


MODELPLAN  
REFRENCE NUMBER  
COMPOSITION

PA40420  
(X/M)Pure Cellar left UEBR

LAYOUT FA

Version, 1.0

**BORA**

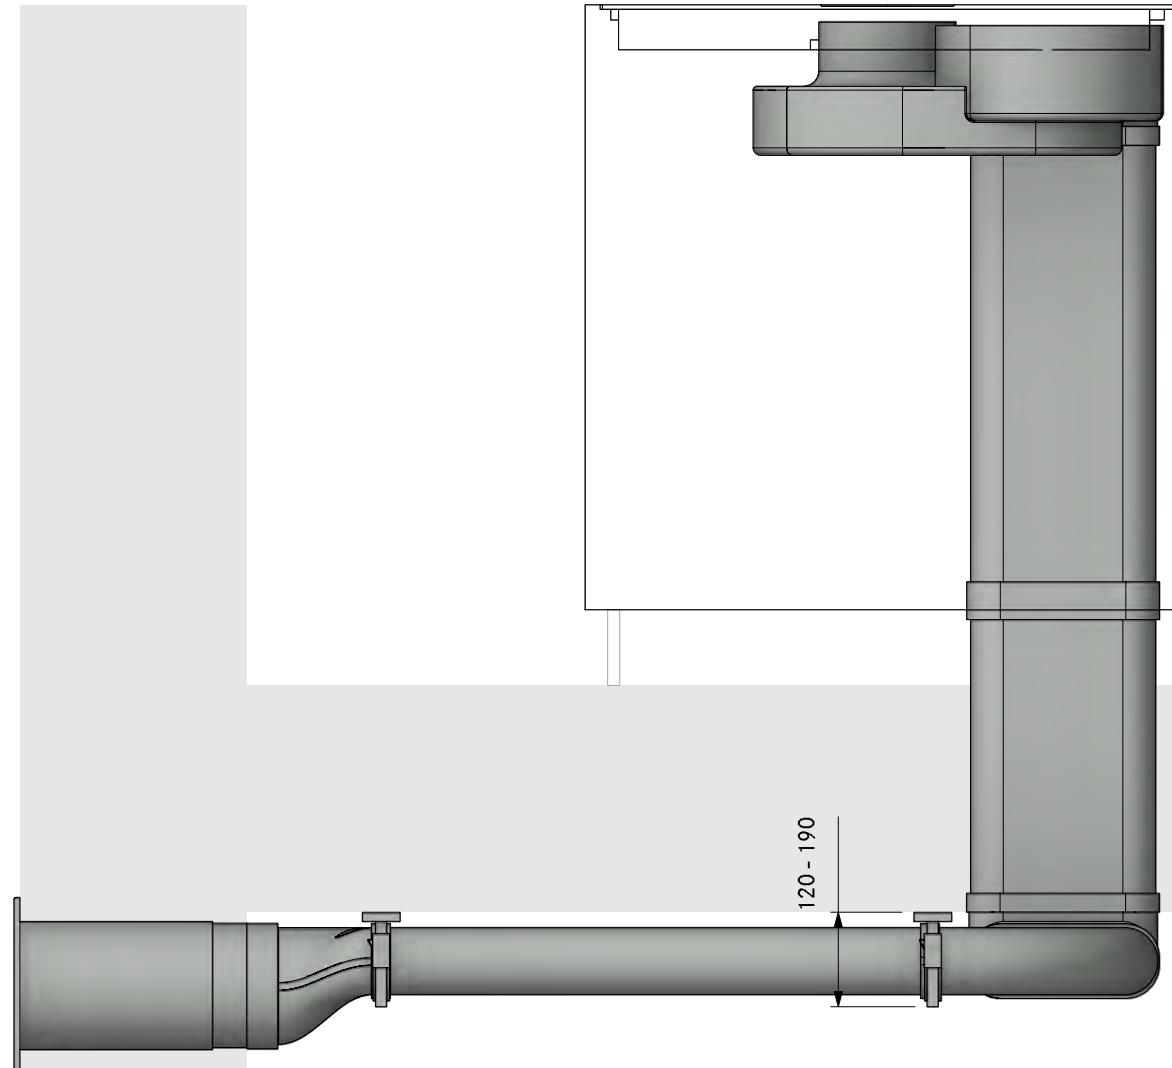


The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.


+49 (0) 80 35 98 40 - 140  
planung@bora.com

LAYOUT

Detail

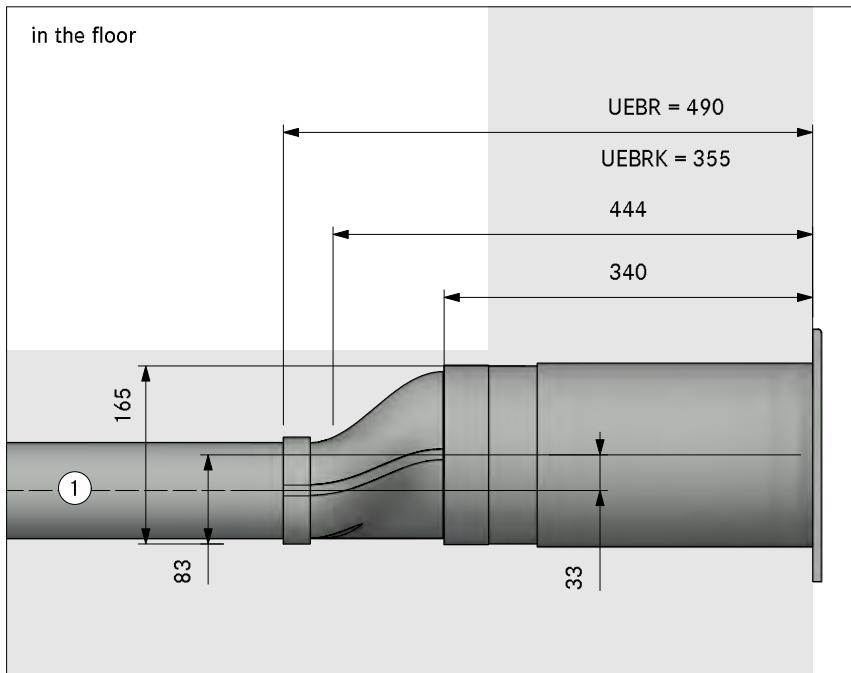

in the plinth area

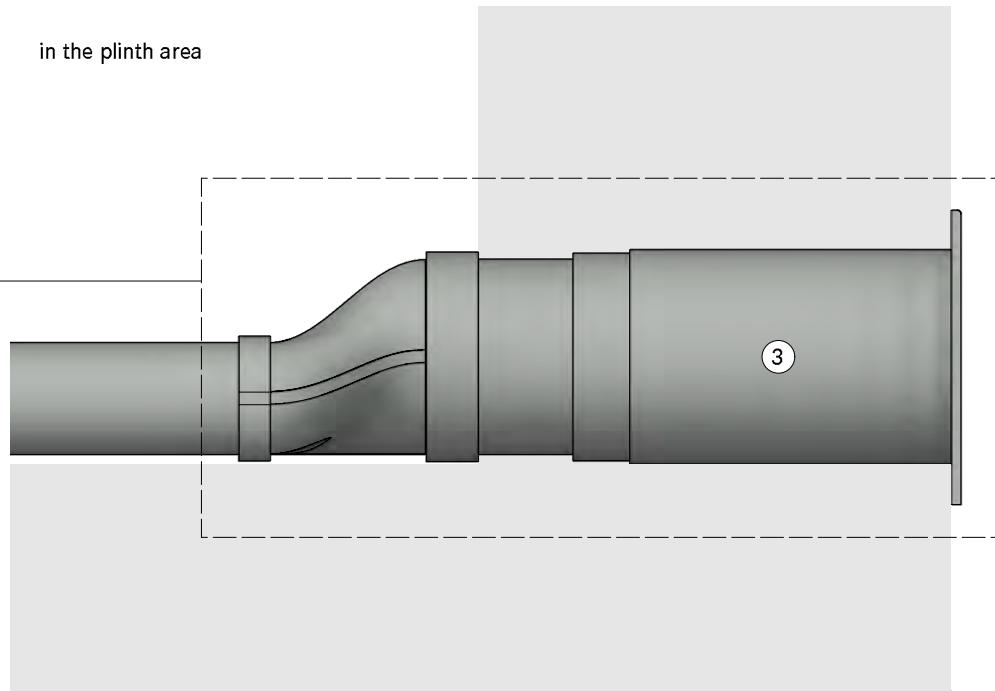

1. Installation in floor structure according to DIN 18560-2 (if completely in the levelling layer). If the floor structure deviates from DIN18560-2, a screed reinforcement layer is required
2. One mounting bracket set per length of Ecotube is recommended, positioned at the connection sleeve
3. Hole size min. Ø180mm. Wall vent must be able to fully open for air to extract

