



Planning booklet

PUXU – PURMU - PURU

Contents

Information	3
Unguided recirculated air	5-28
Partially guided recirculated air	29-41

Information

To make it easier for you to work with standard planning situations, which we have illustrated in our so-called sample plans, we have created two planning booklets for each product series.

For each product family, there is one planning booklet for exhaust air solutions and one for recirculation air solutions.

With the one-off download of 10 planning booklets, you have access to the complete range of our more than 500 sample plans. By simply linking to the table of contents and using the inserted bookmarks, you can find the planning you need easily, quickly and effectively.

We will be happy to check your installation situation and parts list. Simply send us the floor plan of your kitchen design and the following information by e-mail to planung@bora.com:

Which BORA system is being planned?

Should the system be operated with exhaust air or recirculated air?

Necessary information for...

... Exhaust air: Desired position of the wall box on the outer wall?
 Level of the duct routing (plinth area, floor structure, or on the basement ceiling)?
 If applicable, route of the exhaust air duct, if direct route not possible.

... Recirculation: ULBF or ULB3X air purification box

You can reach us for further questions by telephone at
+49 (0) 80 35 98 40 - 140.

Naming Sample Plans

„speaking numbering system”

Quantity exhaust modules	System	Version	Level	Offset	Direction	End of Ducting	Special
2	PKA3 Professional 3.0	A - exhaust	0 - without	0 - without	0 - without	0 - without	0 - without
	PKAS3 Professional 3.0 compact	U - recirculation	1 - worktop	1 - EFRV	1 - back	1 - UEBF	1 - hanging
	CKA2 Classic 2.0		2 - plinth	2- EFRG	2 - right	2 - UEBR	2 - standing
	P X Pure/M Pure/Pure		3 - floor construction		3 - front	3 - swanneck UEBF	3 - blind corner
	SP S Pure		4 - cellar		4 - left	4 - swanneck UEBR	4 - upright
	B Basic					5 - ULBF	
						6 - ULB3X	
						7 - PULBTA	

Example:

P U 2 0 4 5 0

Cooktop extractor X Pure, M Pure, Pure recirculation version, plinth, ducting to the left with ULBF

Unguided recirculated air

integrated	6
ULBF	18
ULB3X	24

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10000
(X/M)Pure Recirculation

LAYOUT 3D


Version, 1.0

BORA

Count	Item BORA
1	PURU / Pure surface-/induction cooktop with integrated PURMU / cooktop extractor - Recirculation PUXU


Please check for accuracy. Seals included. Are optically not displayed.

PURU / PURMU / PUXU

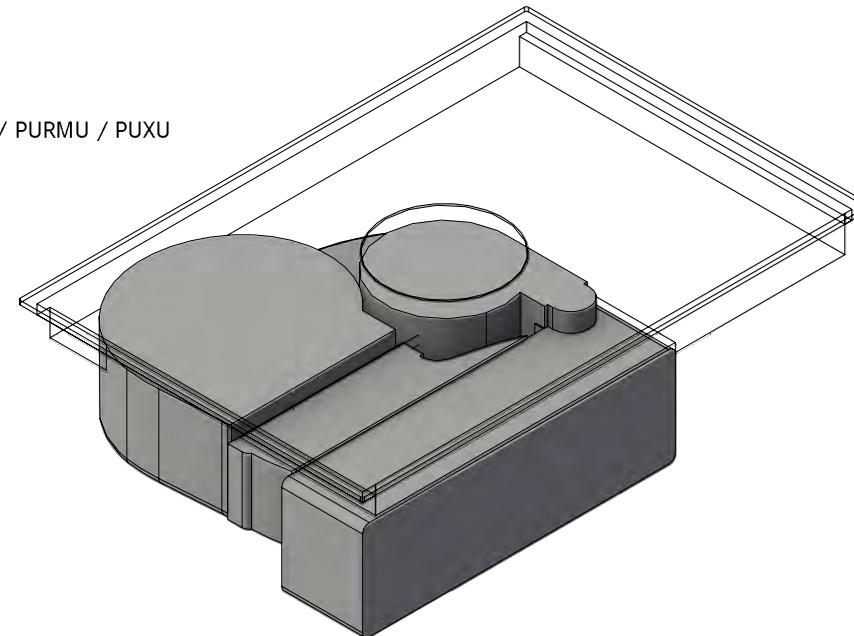

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

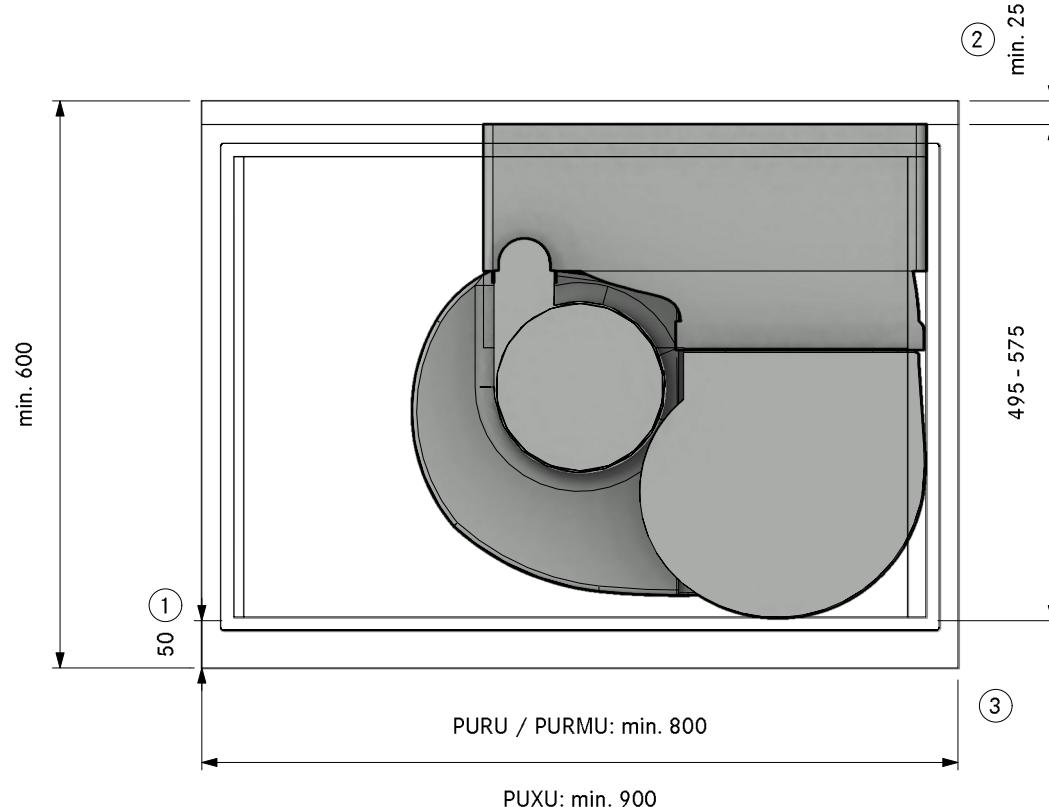

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Provide min. 25mm between the back of the base cabinet and the component behind

3. Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room

MODELPLAN
REFRENCE NUMBER
COMPOSITION

PU 10000
(X/M)Pure Recirculation

LAYOUT

SA

Version, 1.0

BORA




1. For oversized cabinets, a reversible cable protection shelf must be installed

MODELPLAN
REFRENCE NUMBER
COMPOSITION

PU 10000
(X/M)Pure Recirculation

LAYOUT FA

Version, 1.0

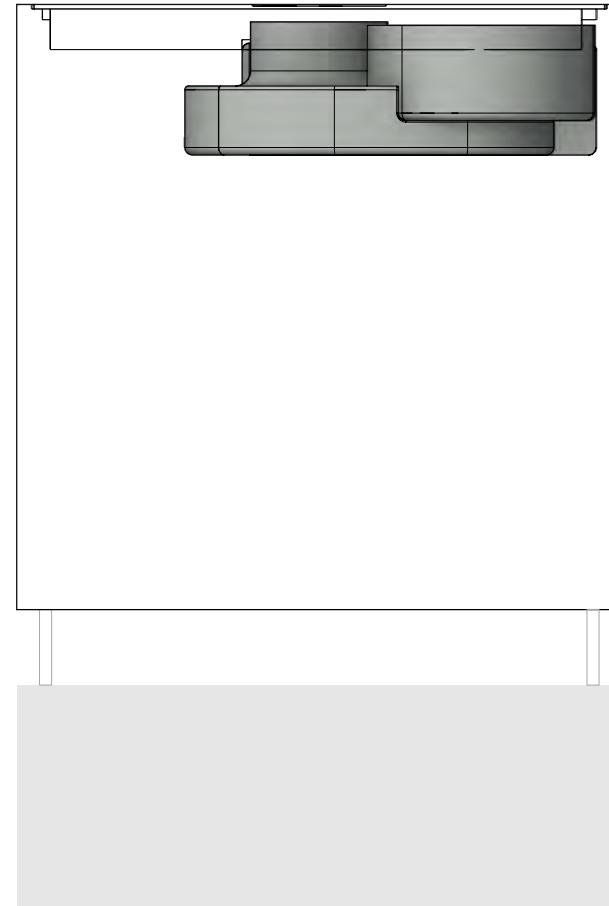

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFRENCE NUMBER
COMPOSITION


PU 10000
(X/M)Pure Recirculation

LAYOUT

DETAIL

Version, 1.0

BORA

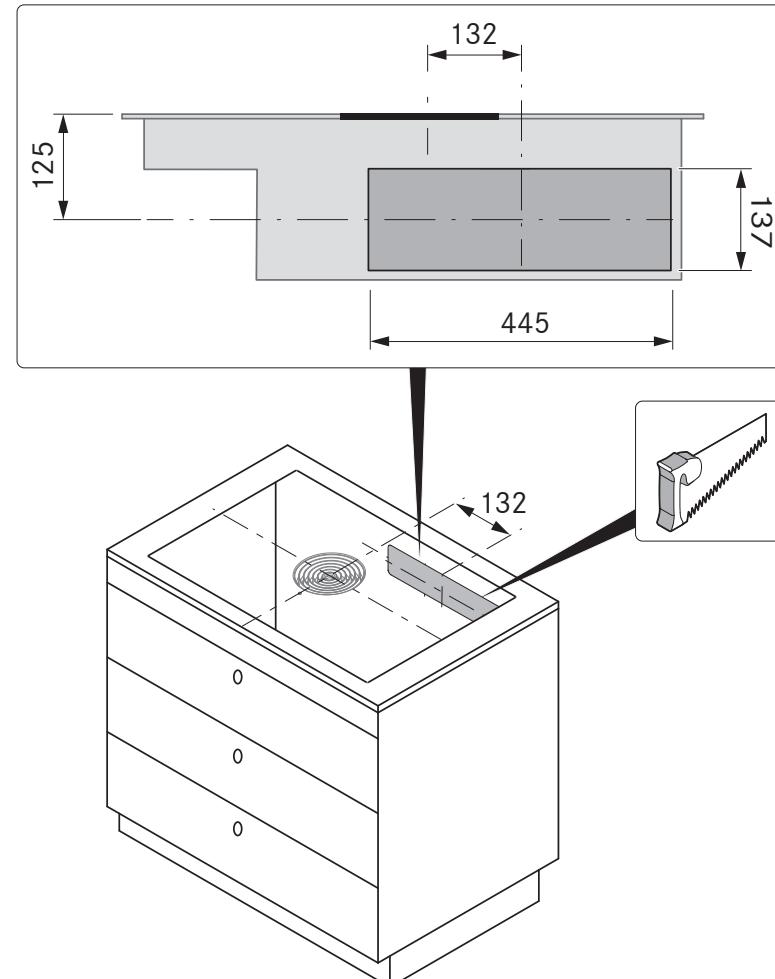

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10070
(X/M)Pure Recirculation PULBTA


LAYOUT 3D


Version, 1.0

BORA

Count	Item BORA
1	PURU / Pure surface-/induction cooktop with integrated PURMU / cooktop extractor - Recirculation PUXU
1	PULBTA Pure air purification box telescopic pull-out
Please check for accuracy. Seals included. Are optically not displayed.	

PURU / PURMU / PUXU

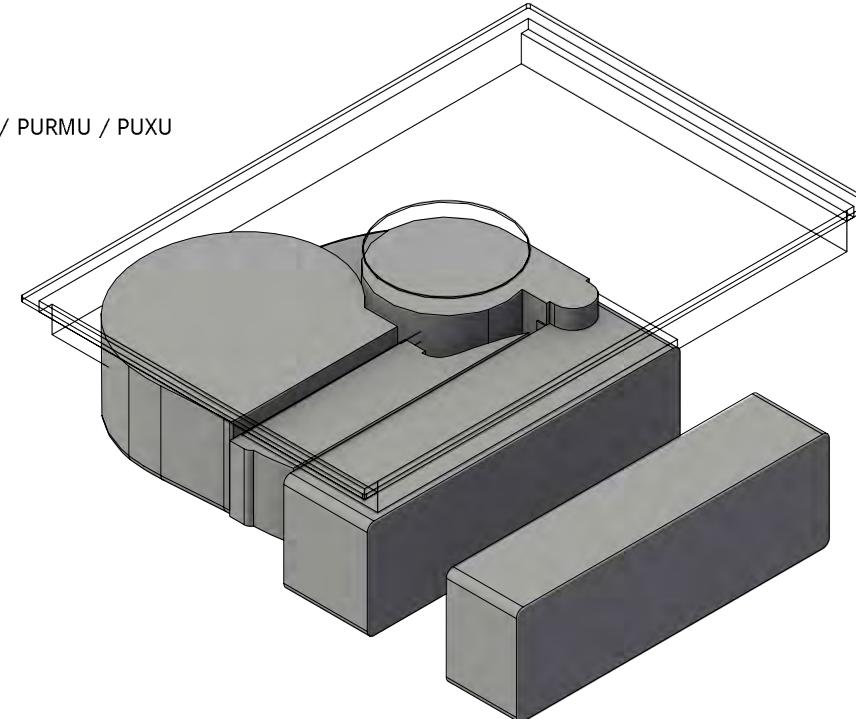

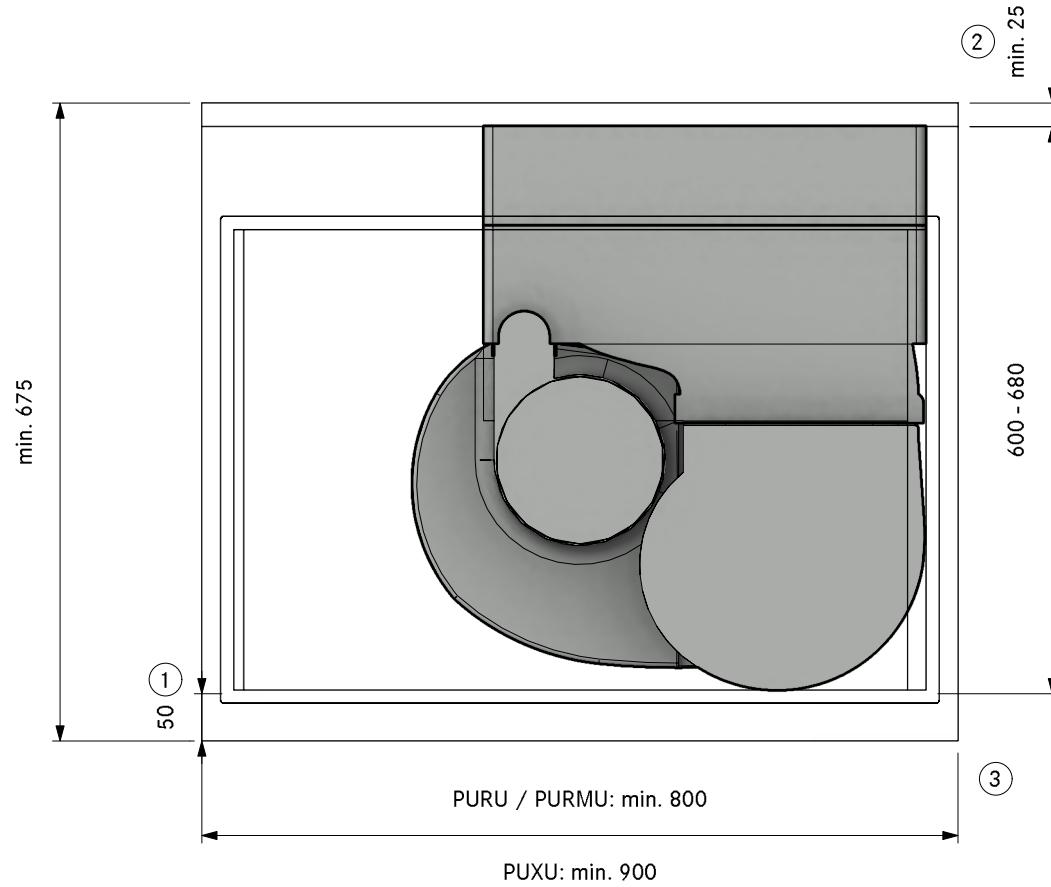

- ① At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.
- ② Provide min. 25mm between the back of the base cabinet and the component behind
- ③ Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room


MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10070
(X/M)Pure Recirculation PULBTA

LAYOUT SA

Version, 1.0

BORA

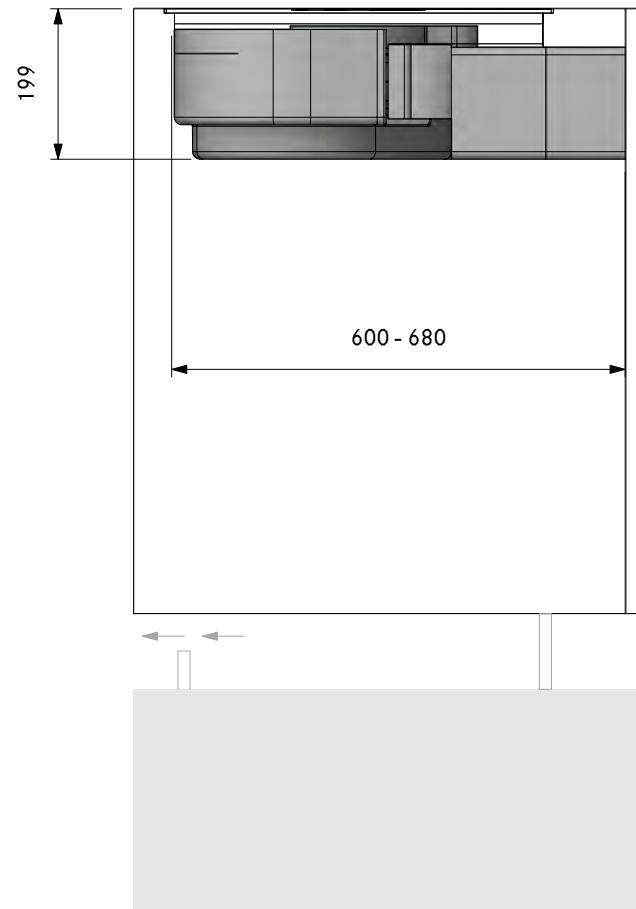


MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10070
(X/M)Pure Recirculation PULBTA

LAYOUT **FA**

Version, 1.0

BORA

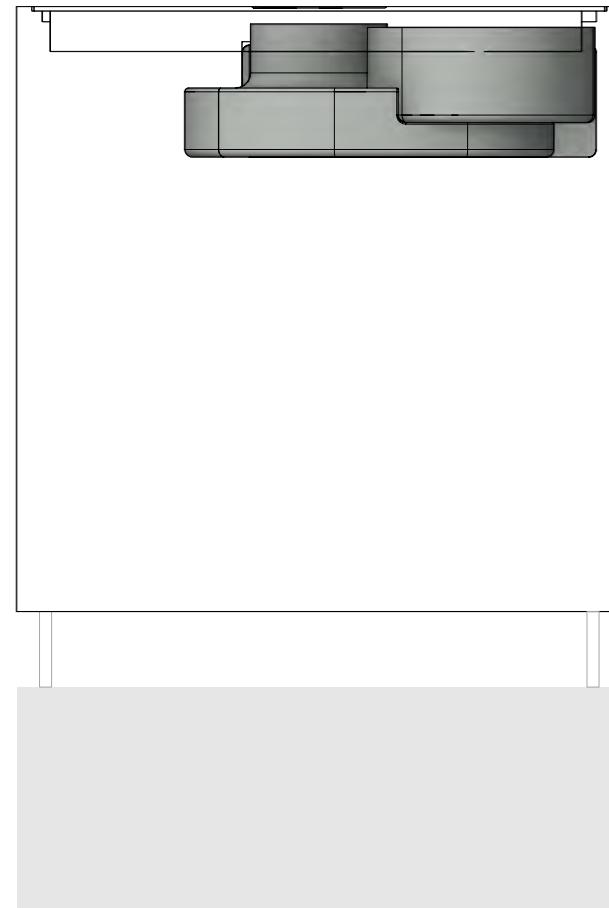

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com


MODELPLAN
REFRENCE NUMBER
COMPOSITION
LAYOUT

PU 10070
(X/M)Pure Recirculation PULBTA

Version, 1.0

BORA

DETAIL

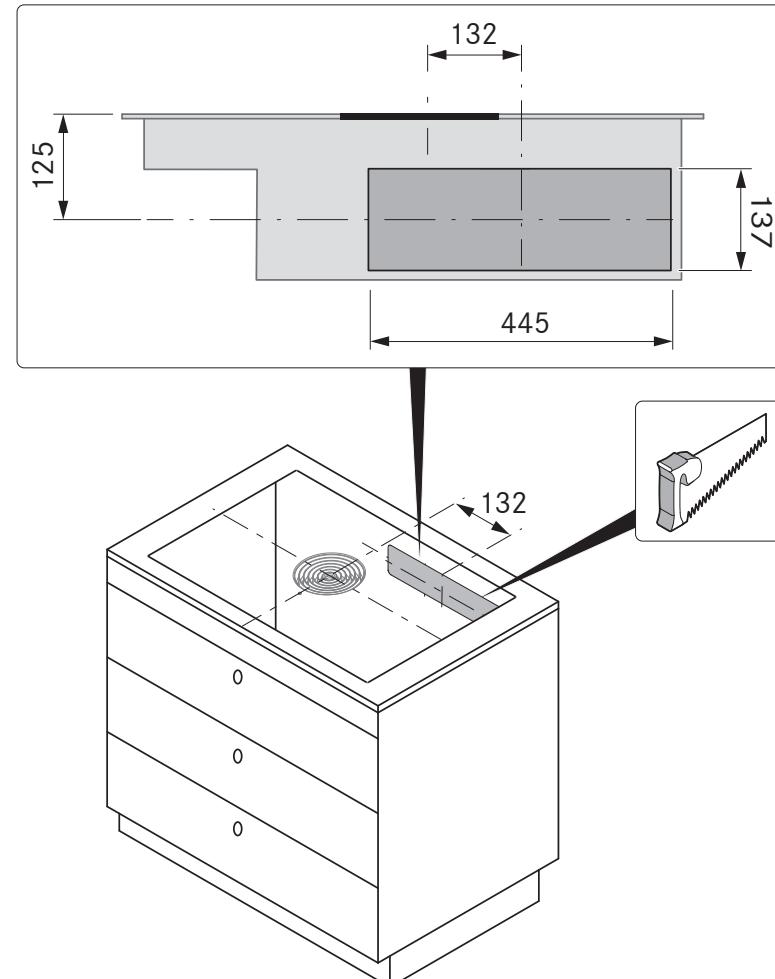

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10051
(X/M)Pure Worktop ULBF hanging


LAYOUT 3D

Version, 1.0

BORA

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
1	ULBF air purification box flexible
Item BORA Ecotube	
1	EFBV90 90° bend flat vertical
1	EFV duct connection flat
1	EFS750 shallow duct with partition 750mm


Please check for accuracy. Seals included. Are optically not displayed.

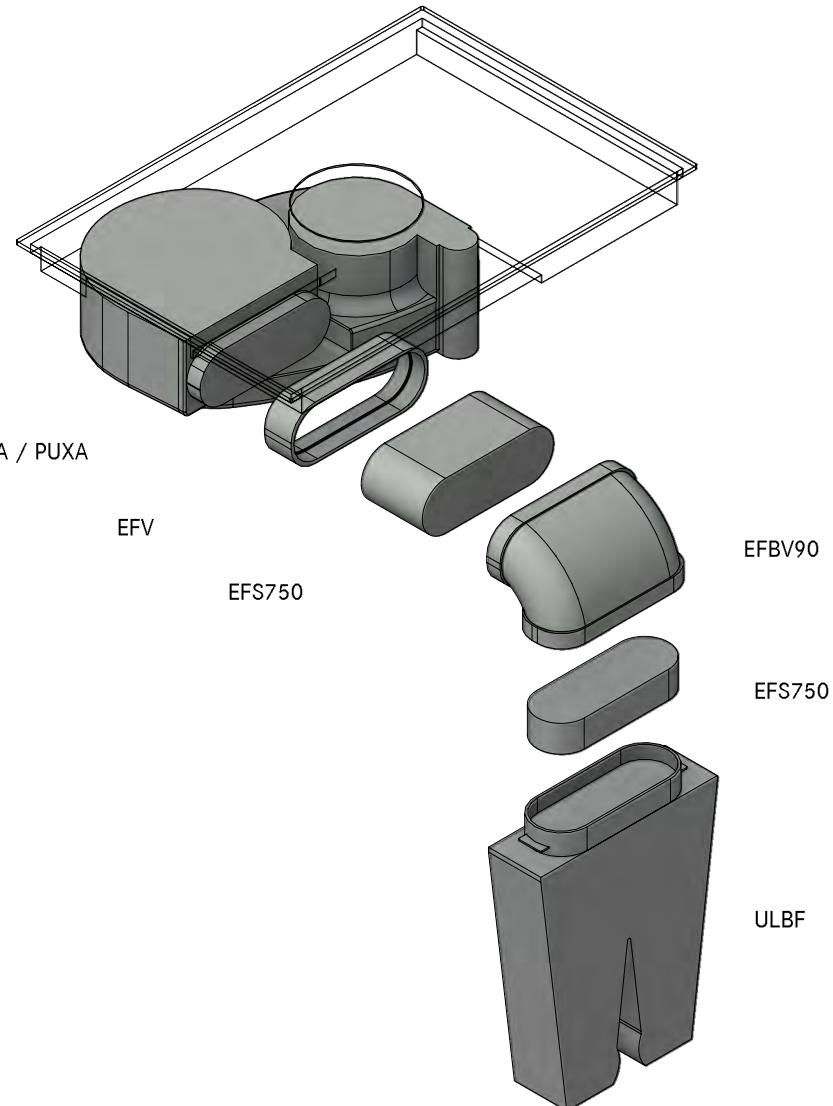

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

Page 1

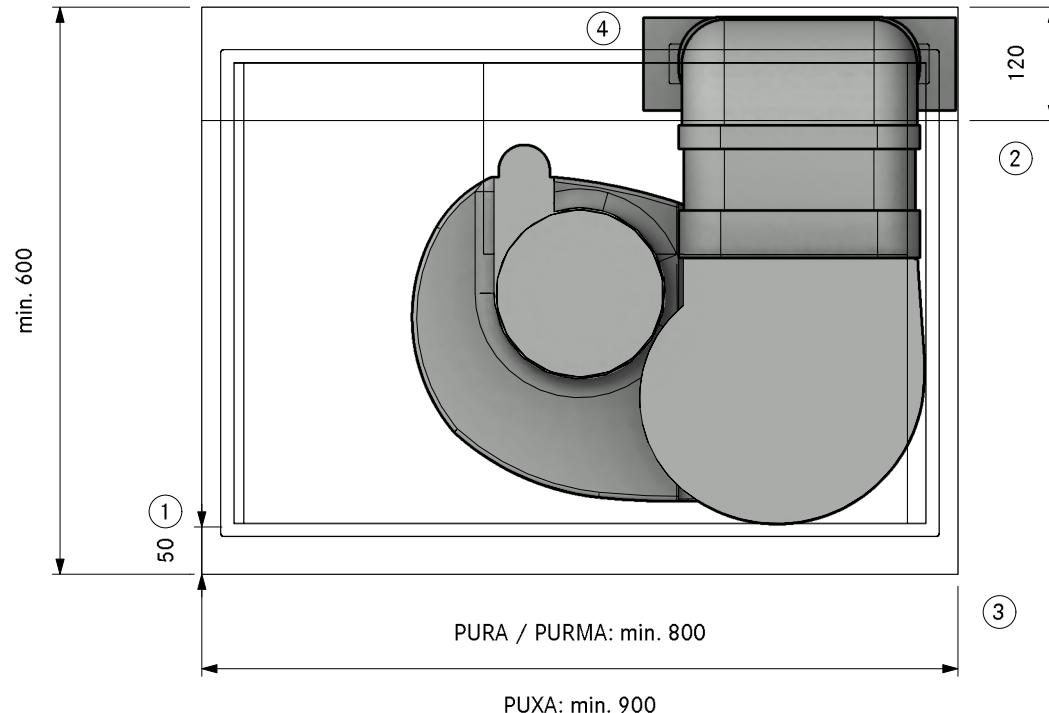

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room

4. Recirculation filter must be accessible. Optimal filtration capacity with 500mm straight ducting before the filter


MODELPLAN
REFRENCE NUMBER
COMPOSITION

PU 10051
(X/M)Pure Worktop ULBF hanging

LAYOUT SA

Version, 1.0

BORA

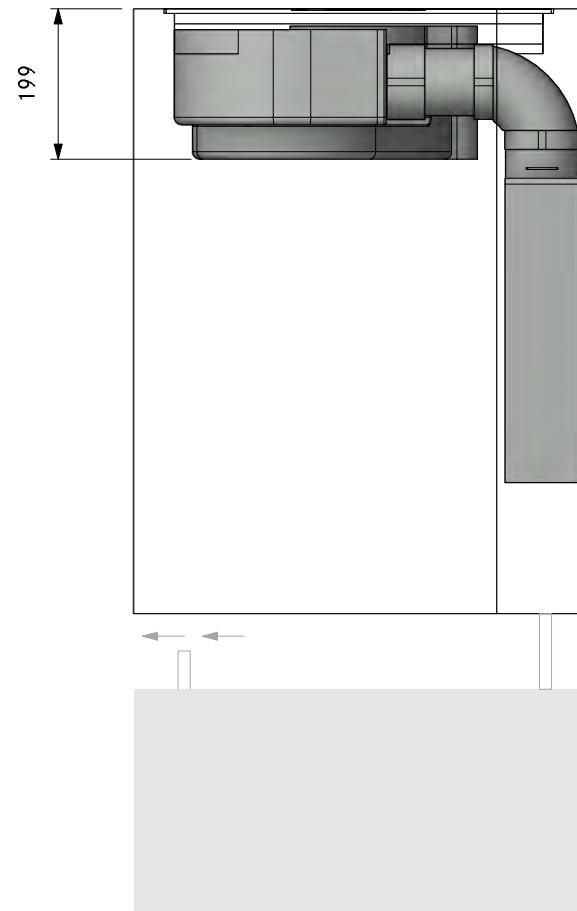

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com


MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10051
(X/M)Pure Worktop ULBF hanging

LAYOUT FA

Version, 1.0

BORA

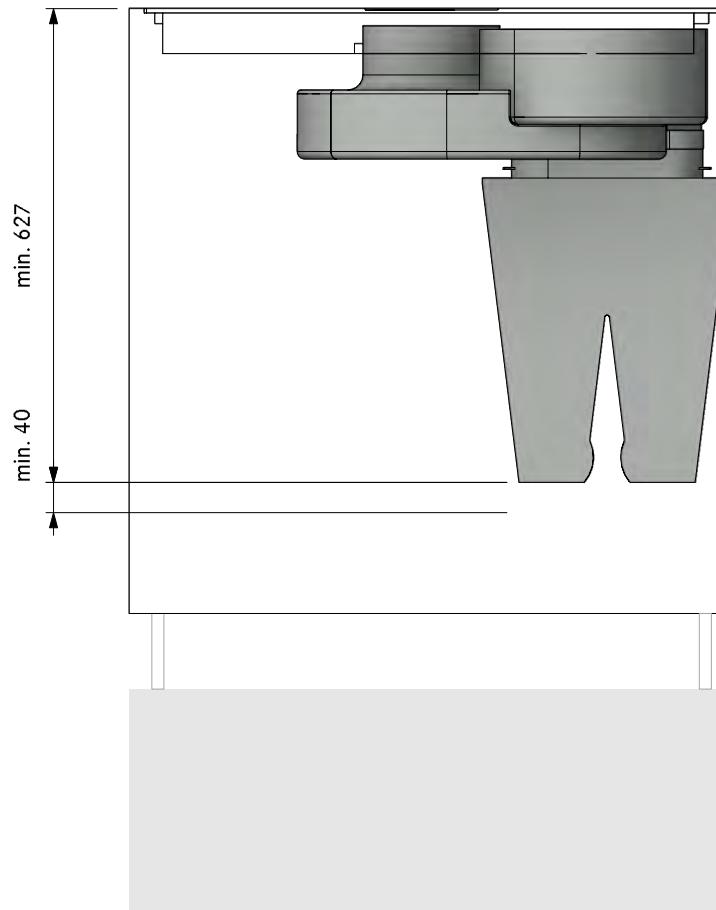

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.





+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10051
(X/M)Pure Worktop ULBF hanging

LAYOUT

Detail

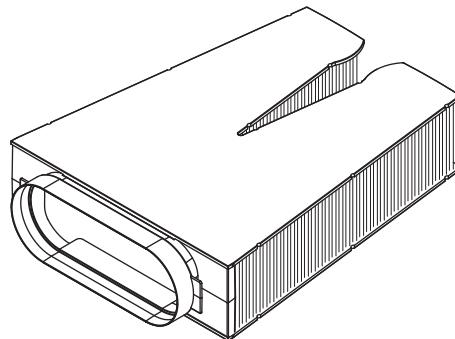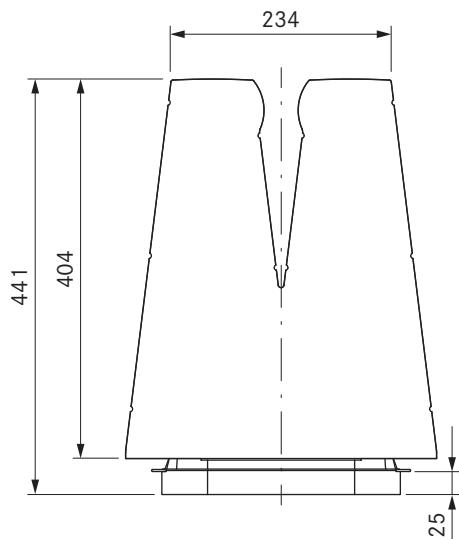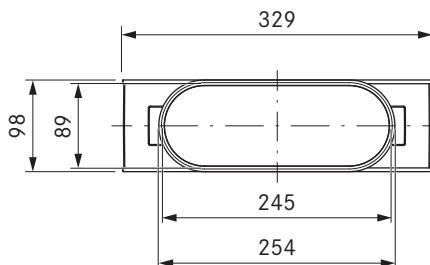

Technical data

Dimensions (width x depth x height)	329 x 441 x 98 mm
Weight (incl. accessories/packaging)	Approx. 2,5 kg
Casing material	Plastic
duct connection	BORA Ecotube
Filter material	Activated charcoal made from coconut shells
Activated charcoal granulate volume	1.9 kg
Maximum filter service life	300 h (1,5 years)

Product description

- Suitable for Professional 3.0, Professional 2.0, Classic 2.0
- Service life approx. 300 h/1.5 years
- effective odour removal
- Flexible component
- Including required Ecotube seals
- complete system

Scope of delivery

- Flexible air purification box ULBF
- 1x filter mounting bracket
- 1 x flat seal EFD
- installation instructions

Product- and planning instructions

- Clearance of at least 4 cm is required to replace the recirculation unit
- Suspended and horizontal installation options
- Moulded part with a shallow sleeve form
- Access for maintenance must be considered during planning
- Ensure minimum return flow aperture of 500 cm² (e.g. shortened plinth plate or slatted plinth)

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10061
(X/M)Pure Worktop ULB3X hanging


LAYOUT 3D


Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
1	ULB3X air purification box 3
Item BORA Ecotube	
1	EFBV90 90° bend flat vertical
2	EFV duct connection flat
1	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

Version, 1.0

BORA

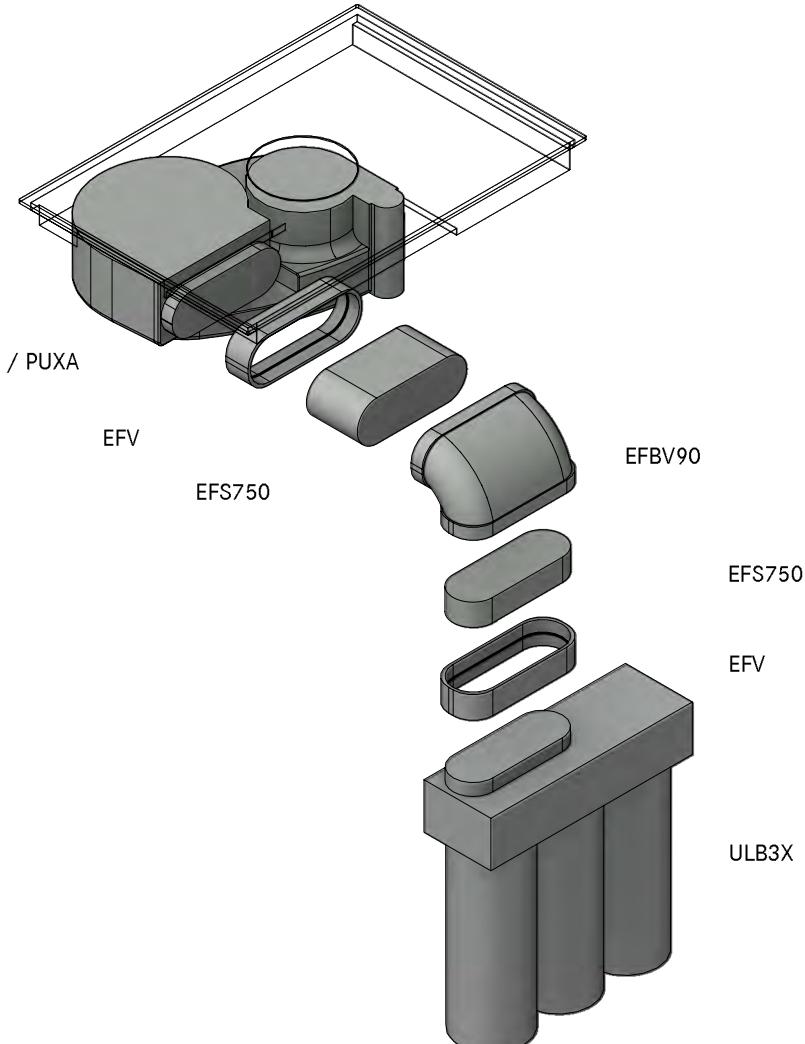

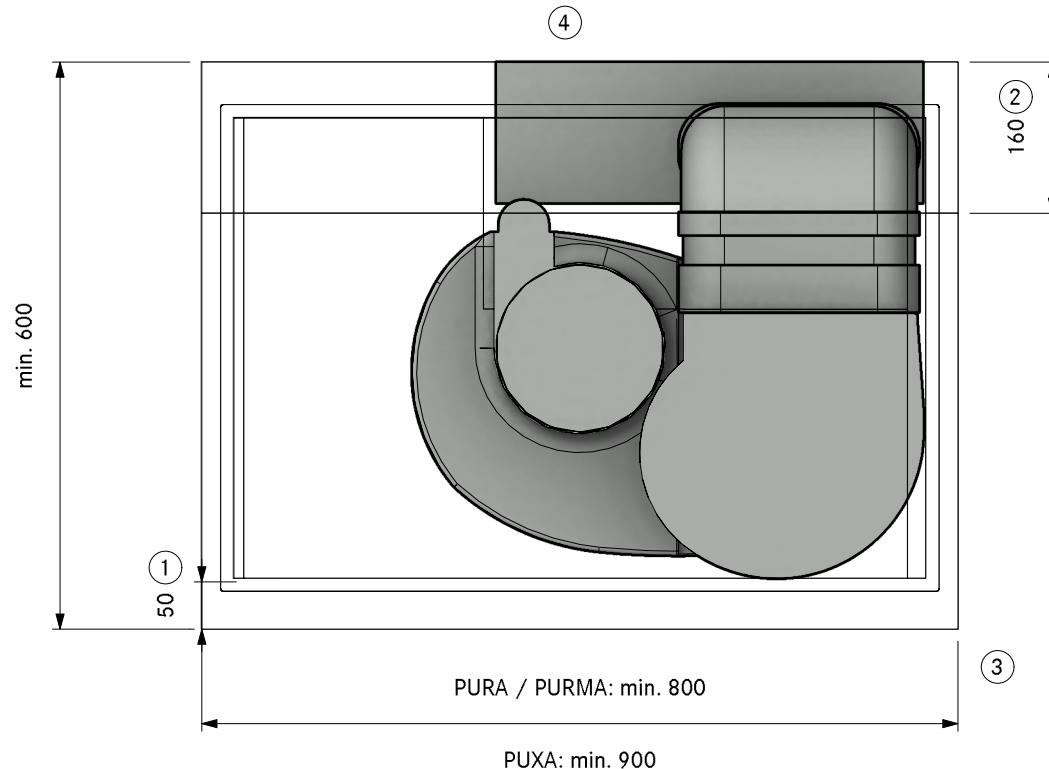

①. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

②. Min. space required

③. Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room


④. Recirculation filter must be accessible, to change the cartridges. Recommended space (WxD) 800x180mm or 500cm² free outflow opening

MODELPLAN
REFRENCE NUMBER
COMPOSITION
LAYOUT

PU 10061
(X/M)Pure Worktop ULB3X hanging
SA

Version, 1.0

BORA

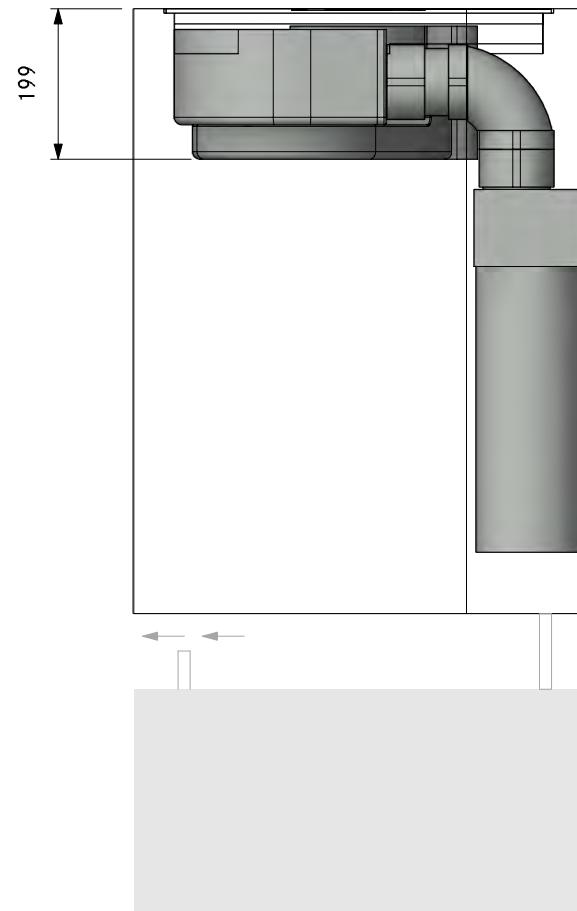

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com


MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU 10061
(X/M)Pure Worktop ULB3X hanging

LAYOUT FA


Version, 1.0

BORA

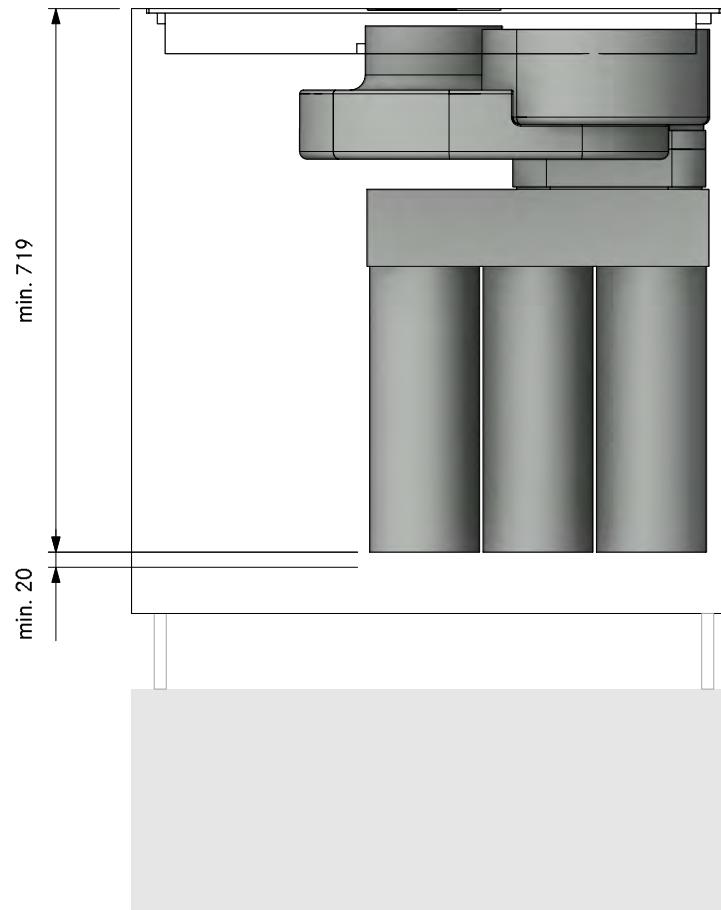

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

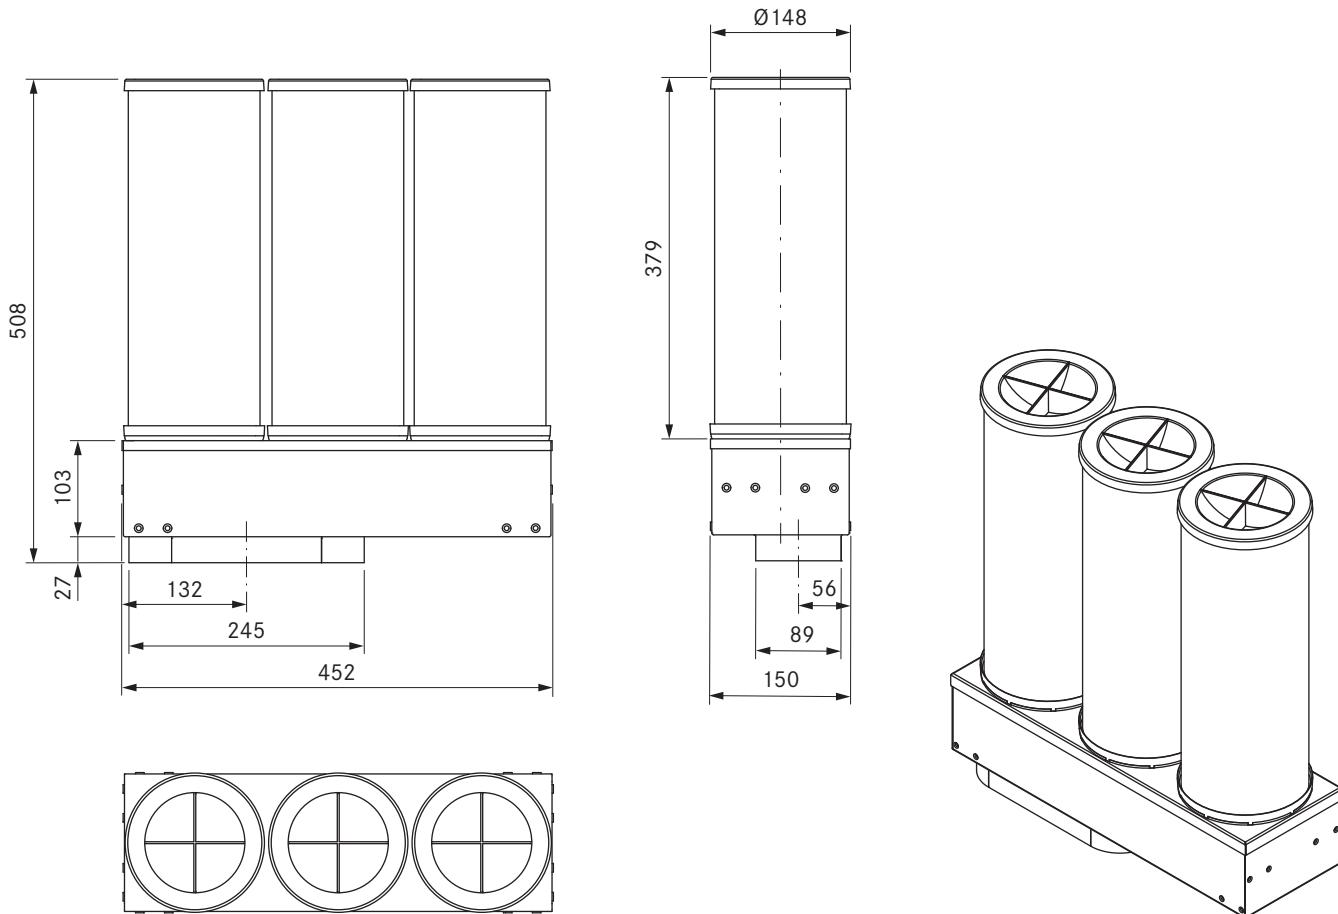

Technical data

Dimensions (width x depth x height)	452 x 150 x 508 mm
Weight (incl. accessories/packaging)	ca. 6,5 kg
Casing material	Galvanised steel
duct connection	BORA Ecotube
Filter material	Granular activated charcoal
Activated charcoal granulate volume	ca. 3 kg
Maximum filter service life	600 h (3 years)

Product description

- Suitable for Professional 3.0, Professional 2.0, Classic 2.0
- Service life approx. 600 h/3 years
- effective odour removal
- Diverse installation options
- Complete BORA system

Scope of delivery

- 3 x activated charcoal filter cartridges
- Housing plinth
- Fixing screw set
- 2 x angle brackets
- installation instructions

Accessories

- replacement activated charcoal filter set ULB3AS

product- and planning instructions

- Duct connection shallow 245 x 89 mm
- Access for maintenance must be considered during planning
- A shallow duct connector EFV is needed to form a direct link between the air purification box and the shallow duct
- Clearance of at least 2 cm is required to replace the filter cartridges
- Ensure minimum return flow aperture of 500 cm² (e.g. shortened plinth plate or slatted plinth)

Partially guided recirculated air

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU20250
(X/M)Pure Plinth ULBF lying right


LAYOUT 3D


Version, 1.0

BORA

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
1	ULBF air purification box flexible
Item BORA Ecotube	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFV duct connection flat
2	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

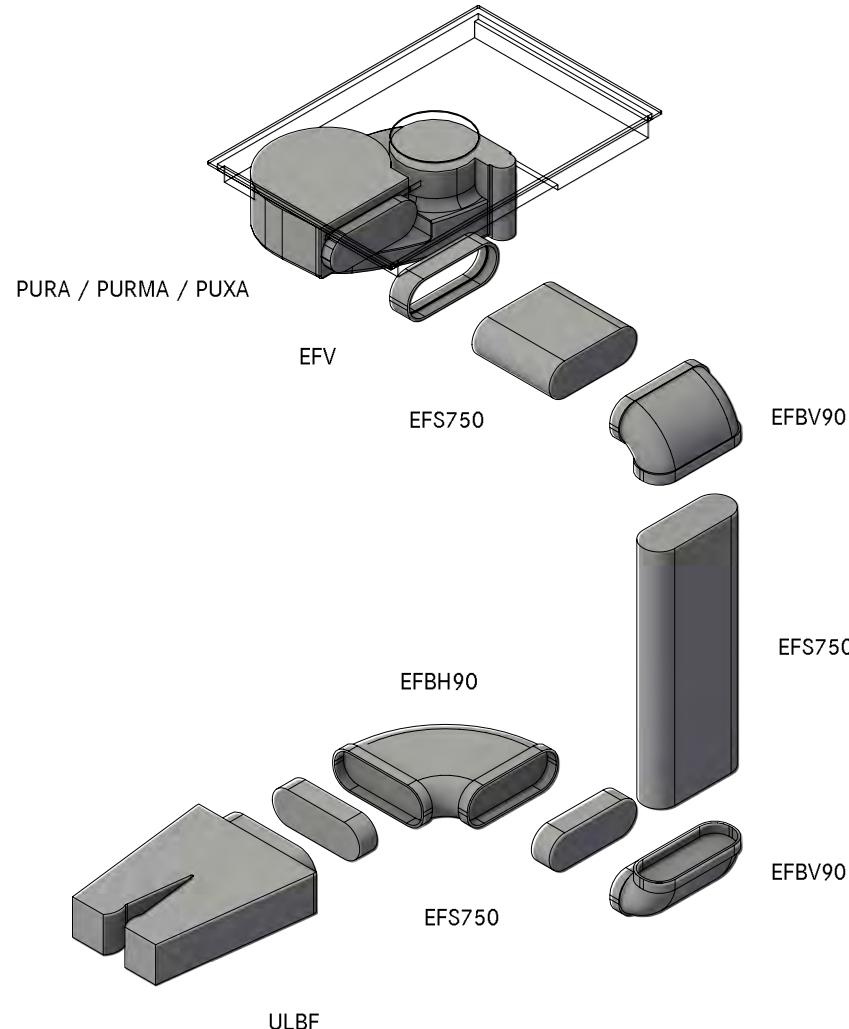

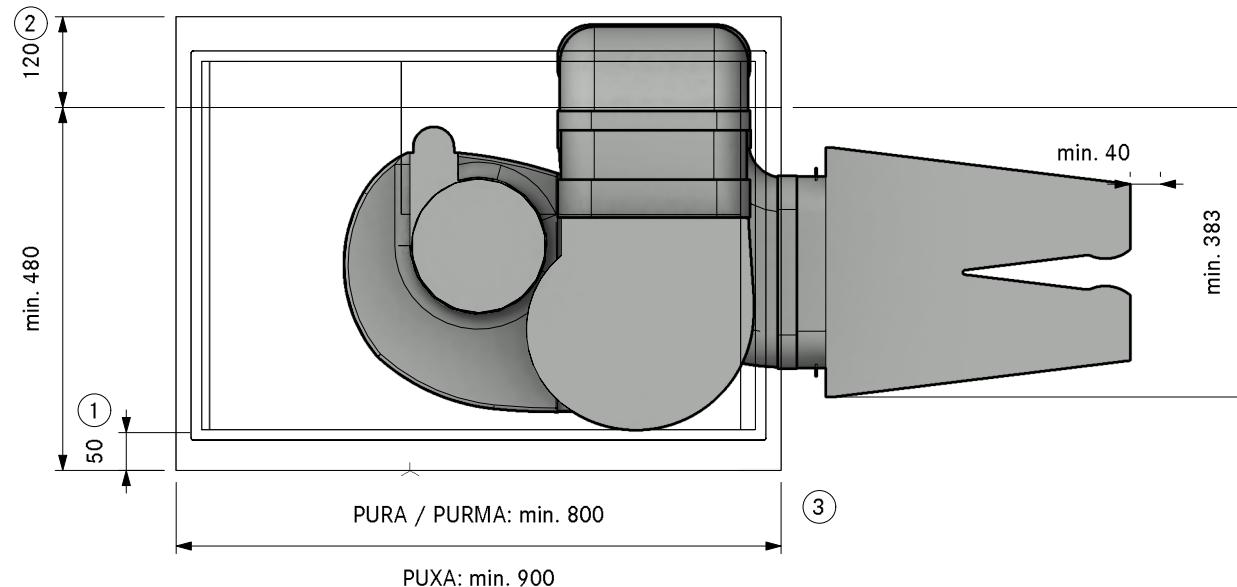

① At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

② Min. space required

③ Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room

④ Recirculation filter must be accessible. Optimal filtration capacity with 500mm straight ducting before the filter


MODELPLAN
REFRENCE NUMBER
COMPOSITION
LAYOUT

PU20250
(X/M)Pure Plinth ULBF lying right

SA

Version, 1.0

BORA

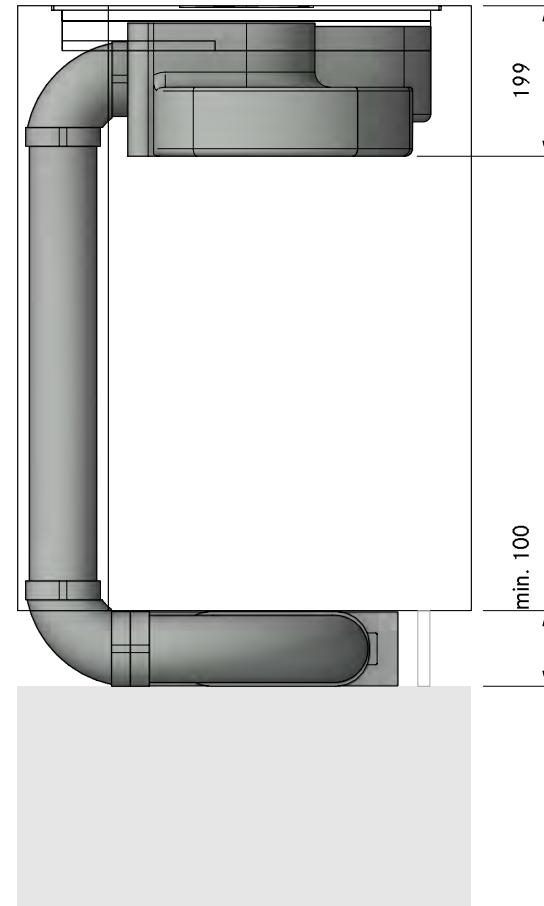

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFRENCE NUMBER
COMPOSITION


PU20250
(X/M)Pure Plinth ULBF lying right

LAYOUT

FA

Version, 1.0

BORA

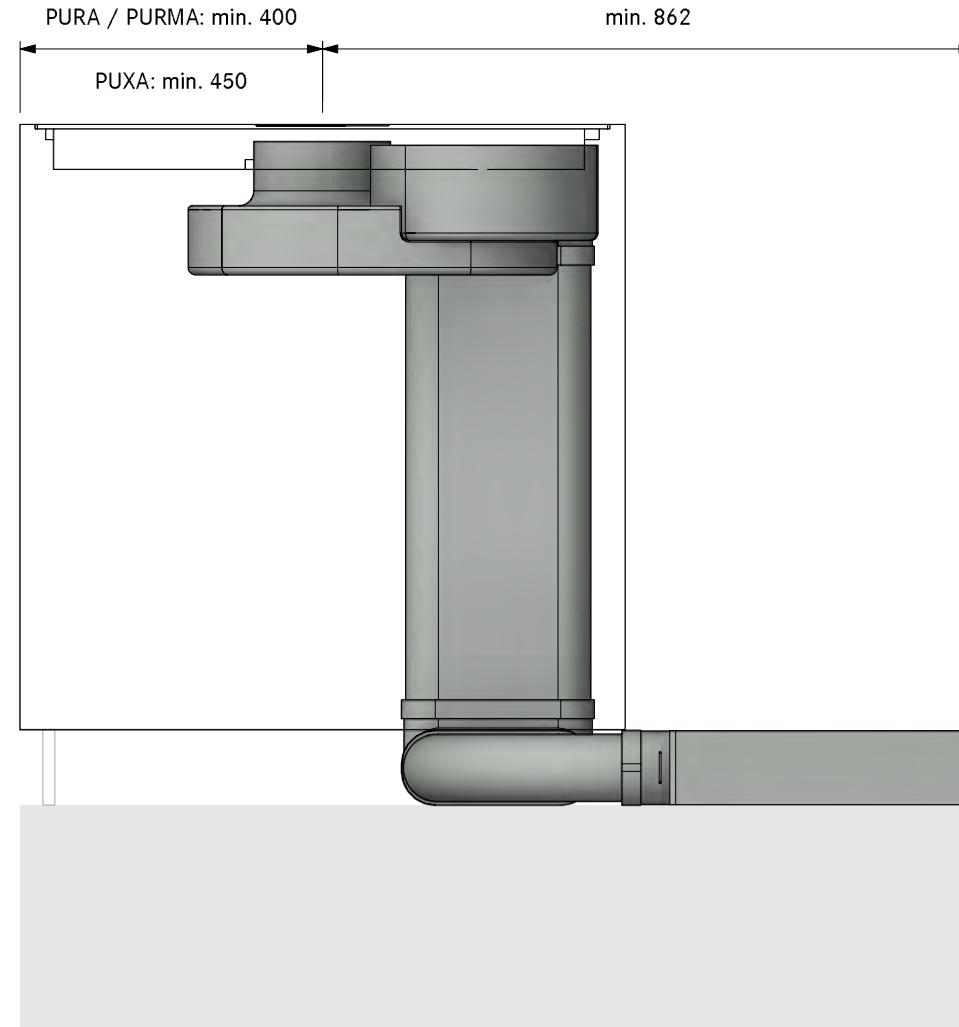

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.





+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU20250
(X/M)Pure Plinth ULBF lying right

LAYOUT

Detail

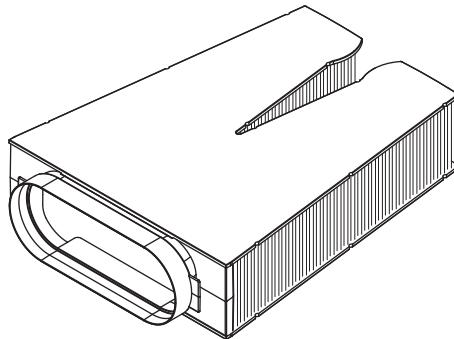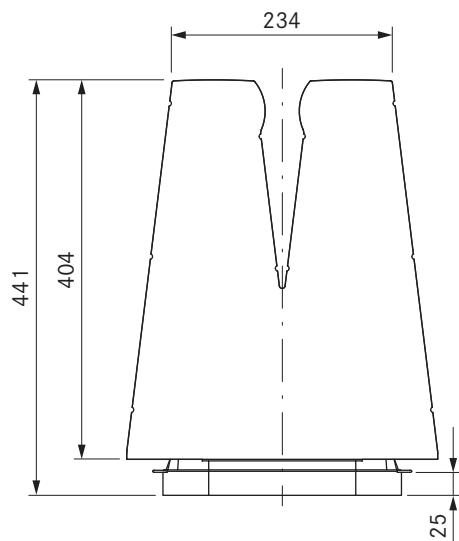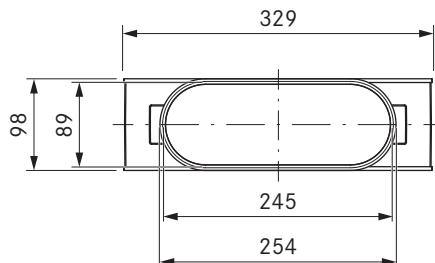

Technical data

Dimensions (width x depth x height)	329 x 441 x 98 mm
Weight (incl. accessories/packaging)	Approx. 2,5 kg
Casing material	Plastic
duct connection	BORA Ecotube
Filter material	Activated charcoal made from coconut shells
Activated charcoal granulate volume	1.9 kg
Maximum filter service life	300 h (1,5 years)

Product description

- Suitable for Professional 3.0, Professional 2.0, Classic 2.0
- Service life approx. 300 h/1.5 years
- effective odour removal
- Flexible component
- Including required Ecotube seals
- complete system

Scope of delivery

- Flexible air purification box ULBF
- 1x filter mounting bracket
- 1 x flat seal EFD
- installation instructions

Product- and planning instructions

- Clearance of at least 4 cm is required to replace the recirculation unit
- Suspended and horizontal installation options
- Moulded part with a shallow sleeve form
- Access for maintenance must be considered during planning
- Ensure minimum return flow aperture of 500 cm² (e.g. shortened plinth plate or slatted plinth)

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU20450
(X/M)Pure Plinth ULBF lying left


LAYOUT 3D


Version, 1.0

BORA

Count	Item BORA
1	PURA / Pure surface-/induction cooktop with integrated PURMA / cooktop extractor - Exhaust air PUXA
1	ULBF air purification box flexible
Item BORA Ecotube	
1	EFBH90 90° bend flat horizontal
2	EFBV90 90° bend flat vertical
1	EFV duct connection flat
2	EFS750 shallow duct with partition 750mm

Please check for accuracy. Seals included. Are optically not displayed.

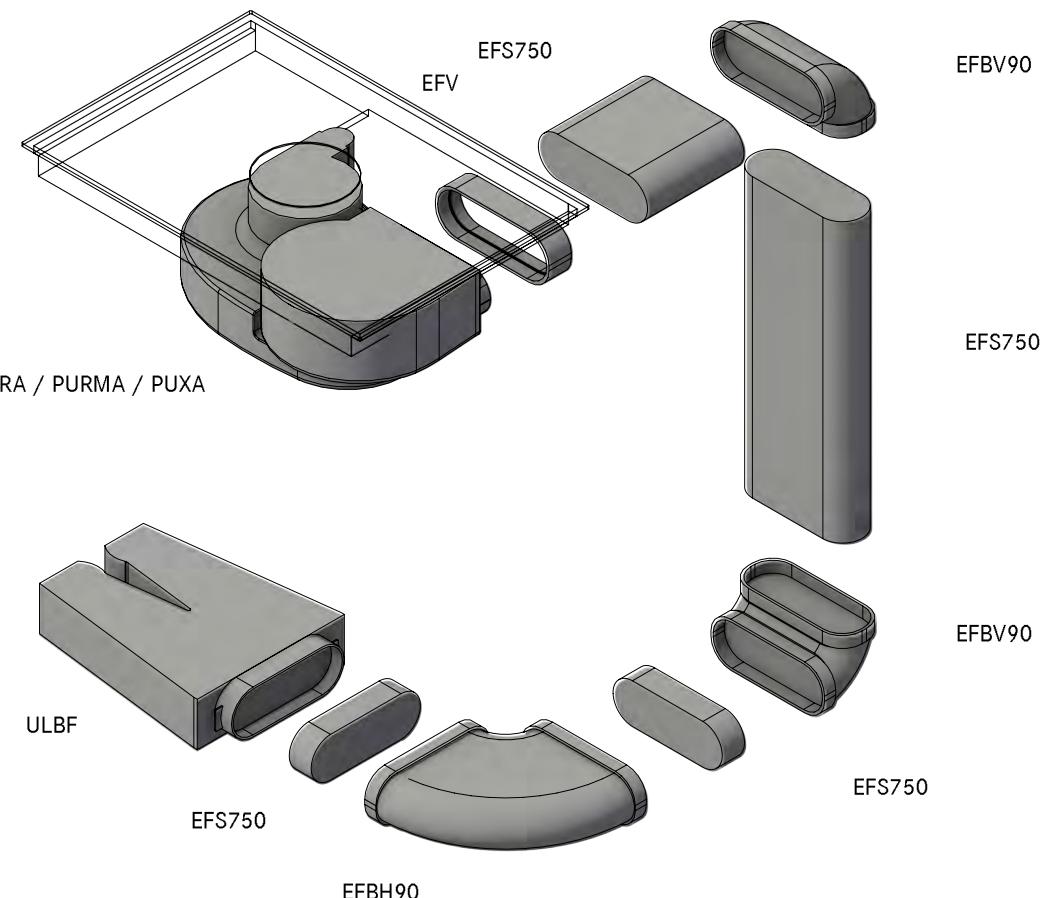

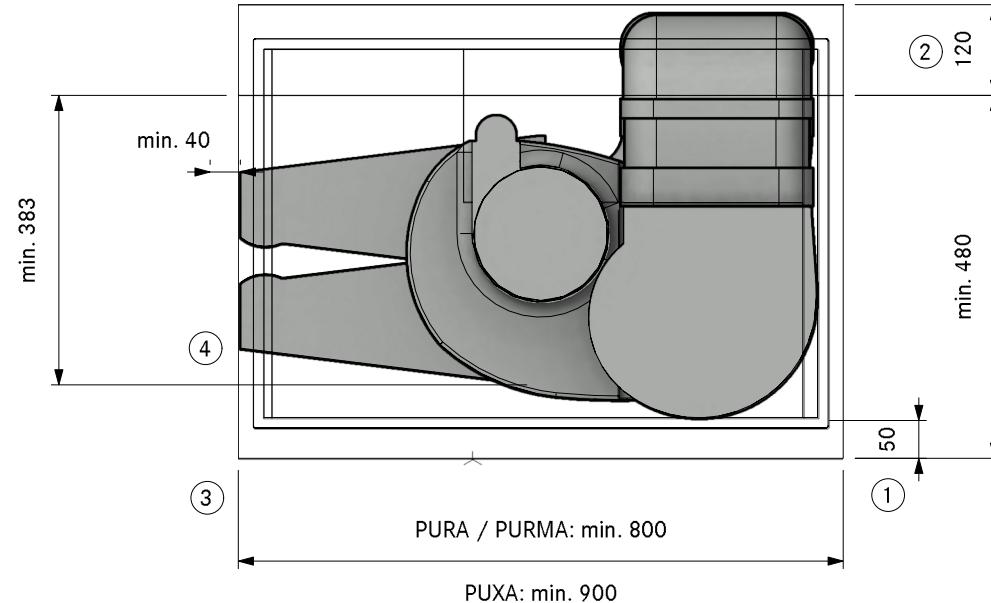

1. At least 50 mm to cut out. This distance is a recommendation. Please contact your worktop manufacturer for the exact distance.

2. Min. space required

3. Provide continuously min. 500 cm² gap per recirculation unit for air to disperse in to room


4. Recirculation filter must be accessible. Optimal filtration capacity with 500mm straight ducting before the filter

MODELPLAN
REFRENCE NUMBER
COMPOSITION
LAYOUT

PU20450
(X/M)Pure Plinth ULBF lying left
SA

Version, 1.0

BORA

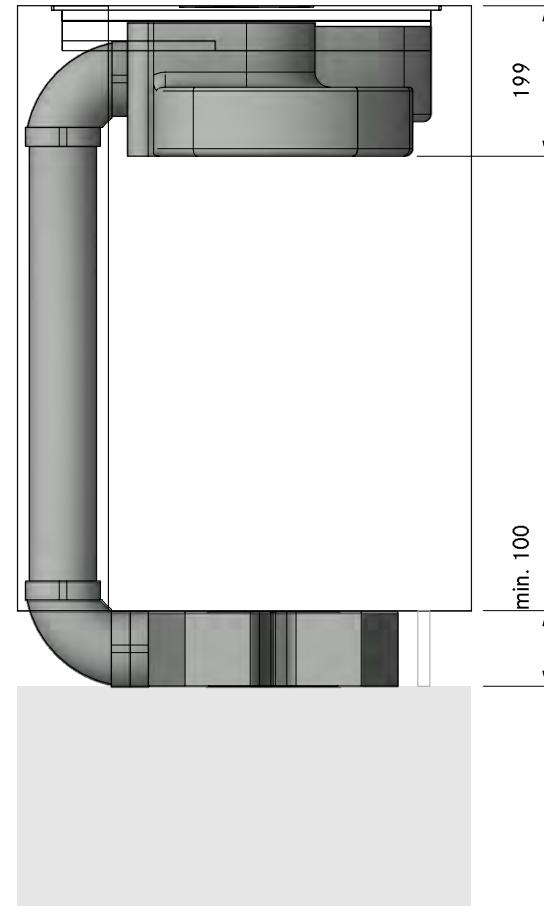

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.

+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFRENCE NUMBER
COMPOSITION


PU20450
(X/M)Pure Plinth ULBF lying left

LAYOUT

FA

Version, 1.0

BORA

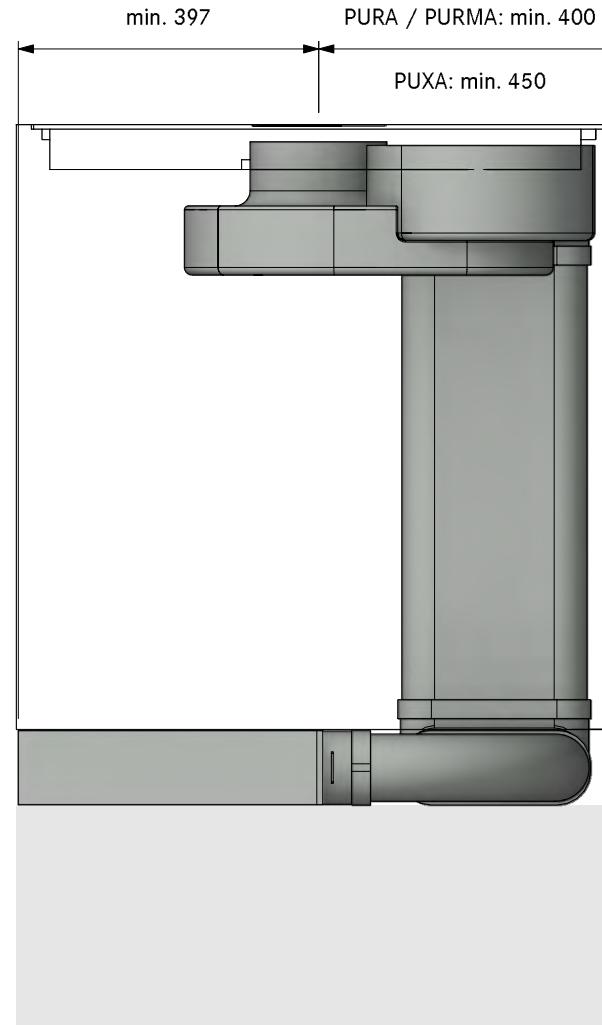

The installation plan has to be verified by the retailer. Please consider the units feet positioning. The depth indications refer to the front edge of the cabinet. To obtain a planning does not automatically entitle to purchase our products. Solely intended for preparing food in private households.





+49 (0) 80 35 98 40 - 140
planung@bora.com

MODELPLAN
REFERENCE NUMBER
COMPOSITION

PU20450
(X/M)Pure Plinth ULBF lying left

LAYOUT

Detail

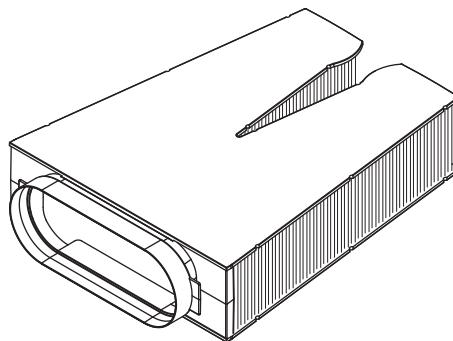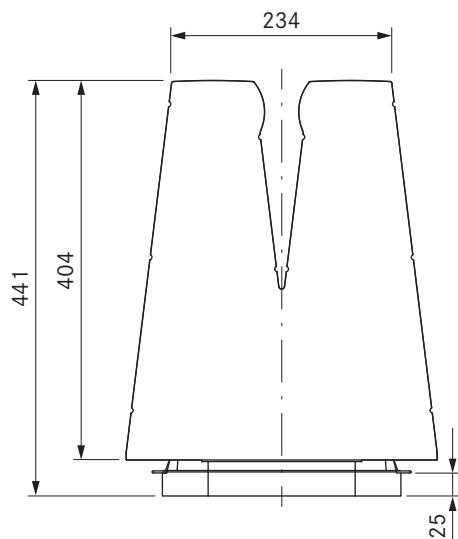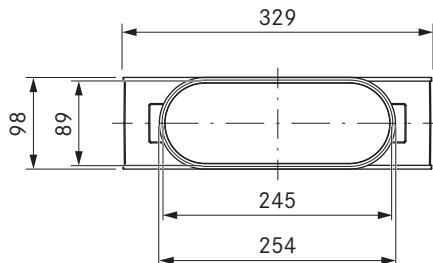

Technical data

Dimensions (width x depth x height)	329 x 441 x 98 mm
Weight (incl. accessories/packaging)	Approx. 2,5 kg
Casing material	Plastic
duct connection	BORA Ecotube
Filter material	Activated charcoal made from coconut shells
Activated charcoal granulate volume	1.9 kg
Maximum filter service life	300 h (1,5 years)

Product description

- Suitable for Professional 3.0, Professional 2.0, Classic 2.0
- Service life approx. 300 h/1.5 years
- effective odour removal
- Flexible component
- Including required Ecotube seals
- complete system

Scope of delivery

- Flexible air purification box ULBF
- 1x filter mounting bracket
- 1 x flat seal EFD
- installation instructions

Product- and planning instructions

- Clearance of at least 4 cm is required to replace the recirculation unit
- Suspended and horizontal installation options
- Moulded part with a shallow sleeve form
- Access for maintenance must be considered during planning
- Ensure minimum return flow aperture of 500 cm² (e.g. shortened plinth plate or slatted plinth)

